

# CM-600 Module Series

4-port Fast Ethernet interface modules for the EDS-600 Series



## Features and Benefits

- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation

## Certifications



## Introduction

The CM-600 Module Series has been designed for use with the EDS-600 Series. The CM-600 Series has a compact modular design with one slot that accommodates 4 ports, which support multiple media types including TX, MSC, SSC, and MST. The CM-600-4TX-BP module supports the bypass relay function on each port and the CM-600-4TX-PTP module supports the hardware IEEE 1588 PTPv2 protocol on each port. The modular design ensures that the EDS-600 Series can meet multiple application requirements.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100BaseT(X) Ports (RJ45 connector)      | CM-600-4TX: 4<br>CM-600-4TX-BP: 4, with bypass relay<br>CM-600-4TX-PTP: 4, with hardware-based PTP<br>CM-600-1TX Series: 1<br>CM-600-2TX Series: 2<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector)  | CM-600-4MSC: 4<br>CM-600-3MSC/1TX: 3<br>CM-600-2MSC/2TX: 2  |
| 100BaseFX Ports (multi-mode ST connector)  | CM-600-4MST: 4<br>CM-600-3MST/1TX: 3<br>CM-600-2MST/2TX: 2  |
| 100BaseFX Ports (single-mode SC connector) | CM-600-4SSC: 4<br>CM-600-3SSC/1TX: 3<br>CM-600-2SSC/2TX: 2  |

|   |  |                         |            |                |       |
|---|--|-------------------------|------------|----------------|-------|
| Time Management   | CM-600-4TX-PTP: IEEE 1588v2 PTP (hardware-based) |                         |            |                |       |
| Optical Fiber   |  |                         | 100BaseFX  |                |       |
|   |  |                         | Multi-Mode | Single-Mode    |       |
|   | Fiber Cable Type                                 |                         | OM1        | 50/125 $\mu$ m | G.652 |
|   |  |                         |            | 800 MHz x km   |       |
|   | Typical Distance                                 |                         | 4 km       | 5 km           | 40 km |
|   | Wavelength                                       | Typical (nm)            |            | 1300           |       |
|   |  | TX Range (nm)           |            | 1260 to 1360   |       |
|   |  | RX Range (nm)           |            | 1100 to 1600   |       |
|   | Optical Power                                    | TX Range (dBm)          |            | -10 to -20     |       |
|   |  | RX Range (dBm)          |            | -3 to -32      |       |
|   |  | Link Budget (dB)        |            | 12             |       |
|   |  | Dispersion Penalty (dB) |            | 3              |       |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |  |                         |            |                |       |

#### Power Parameters

|                   |   |
|-------------------|---|
| Power Consumption | CM-600-4TX: 0.61 W (max.)<br>CM-600-2TX models: 1.56 W (max.)<br>CM-600-1TX models: 2 W (max.)<br>CM-600-4MSC/4MST/4SSC: 2.44 W (max.)<br>CM-600-4TX-PTP: 3.46 W (max.)<br>CM-600-4TX-BP: 2.38 W (max.) |
|-------------------|---|

#### Physical Characteristics

|            |   |
|------------|---|
| IP Rating  | IP30  |
| Dimensions | 29.7 x 144.4 x 144.8 mm (1.17 x 5.69 x 5.7 in)  |
| Weight     | CM-600-4TX: 190 g (0.42 lb)<br>CM-600/1TX, CM-600/2TX models: 230 g (0.51 lb)<br>CM-600-4MSC/4MST/4SSC/4TX-BP: 240 g (0.53 lb)<br>CM-600-4TX-PTP: 185 g (0.41 lb) |

#### Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

#### MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 740,661 hrs              |
| Standards | Telcordia (Bellcore), GB |

#### Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |




## Package Contents

|               |                          |
|---------------|--------------------------|
| Device        | 1 x CM-600 Series module |
| Documentation | 1 x warranty card        |

## Dimensions

Unit: mm (inch)

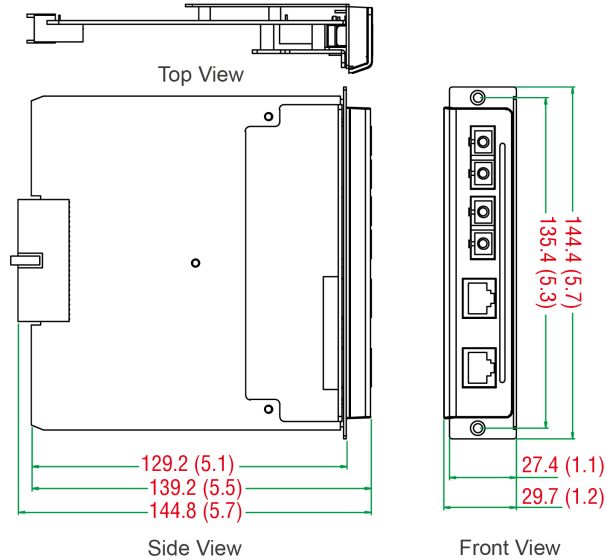

## Ordering Information

| Model Name      | 10/100BaseT(X) Ports RJ45 Connector | 100BaseFX Ports Multi-Mode SC Connector | 100BaseFX Ports Multi-Mode ST Connector | 100BaseFX Ports Single-Mode SC Connector | Operating Temp. |
|-----------------|-------------------------------------|---|---|--|-----------------|
| CM-600-4TX      | 4                                   | -                                       | -                                       | -  | -40 to 75°C     |
| CM-600-4TX-BP   | 4, with bypass relay                | -                                       | -                                       | -  | -40 to 75°C     |
| CM-600-4TX-PTP  | 4, with hardware-based PTP          | -                                       | -                                       | -  | -40 to 75°C     |
| CM-600-4MSC     | -                                   | 4                                       | -                                       | -  | -40 to 75°C     |
| CM-600-4MST     | -                                   | -                                       | 4                                       | -  | -40 to 75°C     |
| CM-600-4SSC     | -                                   | -                                       | -                                       | 4  | -40 to 75°C     |
| CM-600-3MSC/1TX | 1                                   | 3                                       | -                                       | -  | -40 to 75°C     |
| CM-600-3MST/1TX | 1                                   | -                                       | 3                                       | -  | -40 to 75°C     |
| CM-600-3SSC/1TX | 1                                   | -                                       | -                                       | 3  | -40 to 75°C     |
| CM-600-2MSC/2TX | 2                                   | 2                                       | -                                       | -  | -40 to 75°C     |
| CM-600-2MST/2TX | 2                                   | -                                       | 2                                       | -  | -40 to 75°C     |
| CM-600-2SSC/2TX | 2                                   | -                                       | -                                       | 2  | -40 to 75°C     |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-405A Series

## 5-port entry-level managed Ethernet switches



### Features and Benefits

- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and RSTP/STP for network redundancy
- IGMP Snooping, QoS, IEEE 802.1Q VLAN, and port-based VLAN supported
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- PROFINET or EtherNet/IP enabled by default (PN or EIP models)
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-405A Series is designed especially for industrial applications. The switches support a variety of useful management functions, such as Turbo Ring, Turbo Chain, ring coupling, IGMP snooping, IEEE 802.1Q VLAN, port-based VLAN, QoS, RMON, bandwidth management, port mirroring, and warning by email or relay. The ready-to-use Turbo Ring can be set up easily using the web-based management interface, or with the DIP switches located on the top panel of the EDS-405A switches.

### Additional Features and Benefits

- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, Modbus TCP and PROFINET<sup>1</sup> protocols for device management and monitoring
- EtherNet/IP EDS (Electronic Data Sheet) file, custom AOI (Add-On Instructions) and FactoryTalk® View faceplate available
- PROFINET GSDML file and SIMATIC STEP 7 device icons available<sup>1</sup>
- Port mirroring for online debugging
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p and TOS/DiffServ) to increase determinism
- RMON for proactive and efficient network monitoring
- SNMPv1/v2c/v3 for different levels of network management security
- Bandwidth management to prevent unpredictable network status

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-405A, 405A-EIP/PN/PTP Series: 5<br>EDS-405A-MM-SC/MM-ST/SS-SC Series: 3<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-405A-MM-SC Series: 2   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-405A-MM-ST Series: 2   |
| 100BaseFX Ports (single-mode SC connector) | EDS-405A-SS-SC Series: 2   |

1. EDS-405A-PN Series only

| Optical Fiber   | 100BaseFX               |              |                           |              |
|---|-------------------------|--------------|---------------------------|--------------|
|   | Multi-Mode              |              | Single-Mode               |              |
|   | Fiber Cable Type        | OM1          | 50/125 μm<br>800 MHz x km | G.652        |
| Typical Distance  |                         | 4 km         | 5 km                      | 40 km        |
| Wavelength  | Typical (nm)            | 1300         |                           | 1310         |
|   | TX Range (nm)           | 1260 to 1360 |                           | 1280 to 1340 |
|   | RX Range (nm)           | 1100 to 1600 |                           | 1100 to 1600 |
| Optical Power   | TX Range (dBm)          | -10 to -20   |                           | 0 to -5      |
|   | RX Range (dBm)          | -3 to -32    |                           | -3 to -34    |
|   | Link Budget (dB)        | 12           |                           | 29           |
|   | Dispersion Penalty (dB) | 3            |                           | 1            |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |              |                           |              |

|           |  |
|-----------|--|
| Standards | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1w for Rapid Spanning Tree Protocol |
|-----------|--|

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | 802.1Q VLAN, GMRP, GVRP, IGMP v1/v2, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP <sup>2</sup> , Modbus TCP<br>EDS-405A-PN Series: PROFINET IO Device (Slave)   |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Time Management      | All models: NTP Server/Client, SNTP<br>EDS-405A-PTP Series: IEEE 1588v2 PTP (hardware-based)  |

### Switch Properties

|                    |  |
|--------------------|--|
| IGMP Groups        | 256  |
| MAC Table Size     | EDS-405A Series, EDS-405A-EIP/MM-SC/MM-ST/PN/SS-SC Series: 2 K<br>EDS-405A-PTP Series: 8 K |
| Max. No. of VLANs  | 64   |
| Packet Buffer Size | 1 Mbits  |
| Priority Queues    | 4  |
| VLAN ID Range      | VID 1 to 4094  |


2. EDS-405A-EIP Series: EtherNet/IP protocol enabled by default.

|  |  |
|--|--|
| <b>Serial Interface</b>                |  |
| Console Port                           | RS-232 (TxD, RxD, GND), 10-pin RJ45 (19200, n, 8, 1)   |
| <b>DIP Switch Configuration</b>        |  |
| Ethernet Interface                     | Turbo Ring, Master, Coupler, Reserve   |
| <b>Input/Output Interface</b>          |  |
| Alarm Contact Channels                 | Relay output with current carrying capacity of 1 A @ 24 VDC  |
| <b>Power Parameters</b>                |  |
| Input Voltage                          | 12/24/48 VDC, Redundant dual inputs  |
| Operating Voltage                      | 9.6 to 60 VDC  |
| Input Current                          | EDS-405A/405A-T, EDS-405A-EIP/PN Series: 0.21 A @ 24 VDC<br>Fiber models: 0.26 A @ 24 VDC<br>PTP models: 0.23 A @ 24 VDC   |
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| Connection                             | 1 removable 6-contact terminal block(s)  |
| <b>Physical Characteristics</b>        |  |
| Housing                                | Metal  |
| IP Rating                              | IP30   |
| Dimensions                             | 53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)  |
| Weight                                 | EDS-405A-EIP/MM-SC/MM-ST/PN/SS-SC Series: 650 g (1.44 lb)<br>EDS-405A-PTP Series: 820 g (1.81 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)   |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Safety                                 | All models: UL 508<br>non-PTP models: UL 60950-1   |
| EMC                                    | EN 55032/24  |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | Non-PTP models:<br>IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8<br><br>PTP models:<br>IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m<br>IEC 61000-4-4 EFT: Power: 0.5 kV; Signal: 0.5 kV<br>IEC 61000-4-5 Surge: Power: 0.5 kV; Signal: 1 kV |

|                         |   |
|-------------------------|---|
|                         | IEC 61000-4-6 CS: 3 V<br>IEC 61000-4-8  |
| Hazardous Locations     | Non-PTP models: ATEX, Class I Division 2  |
| Maritime                | Non-PTP models: DNV-GL  |
| Traffic Control         | Non-PTP models: NEMA TS2  |
| Freefall                | IEC 60068-2-31  |
| Shock                   | IEC 60068-2-27  |
| Vibration               | IEC 60068-2-6   |
| <b>MTBF</b>             |   |
| Time                    | EDS-405A/405A-T, EDS-405A-EIP/PN Series: 1,547,941 hrs<br>EDS-405A-MM-SC/MM-ST/SS-SC Series: 1,429,327 hrs<br>EDS-405A-PTP Series: 1,316,464 hrs                  |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-405A Series switch  |
| Cable                   | 1 x RJ45-to-DB9 console cable   |
| Installation Kit        | 2 x cap, plastic, for RJ45 port   |
| Documentation           | 1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

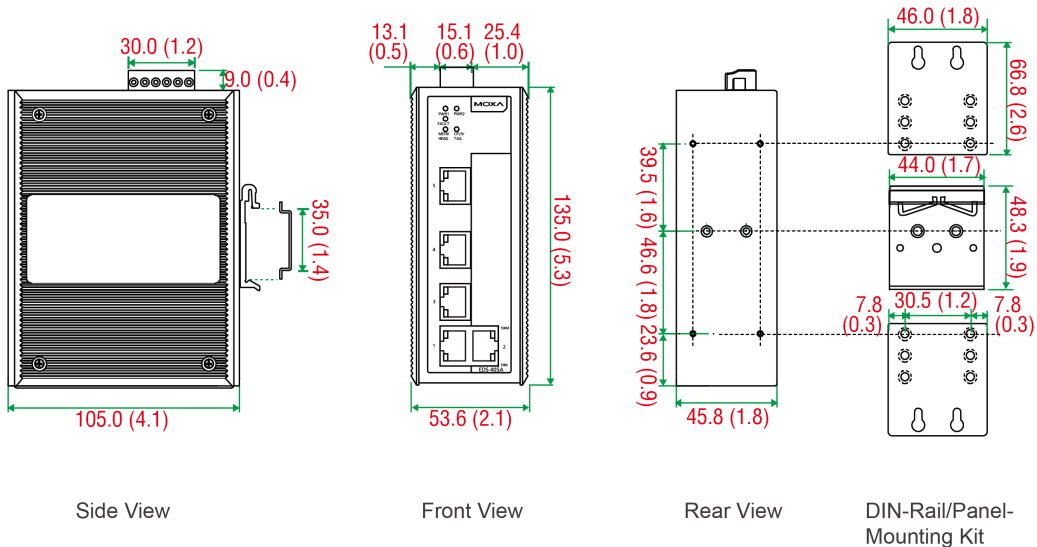

## Ordering Information

| Model Name       | Layer | Total No. of Ports | 10/100BaseT(X) Ports RJ45 Connector | 100BaseFX Ports Multi-Mode SC Connector | 100BaseFX Ports Multi-Mode ST Connector | 100BaseFX Ports Single-Mode SC Connector | Operating Temp. |
|------------------|-------|--------------------|-------------------------------------|---|---|--|-----------------|
| EDS-405A         | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -10 to 60°C     |
| EDS-405A-T       | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -40 to 75°C     |
| EDS-405A-MM-ST   | 2     | 5                  | 3                                   | –                                       | 2                                       | –  | -10 to 60°C     |
| EDS-405A-MM-ST-T | 2     | 5                  | 3                                   | –                                       | 2                                       | –  | -40 to 75°C     |
| EDS-405A-MM-SC   | 2     | 5                  | 3                                   | 2                                       | –                                       | –  | -10 to 60°C     |
| EDS-405A-MM-SC-T | 2     | 5                  | 3                                   | 2                                       | –                                       | –  | -40 to 75°C     |
| EDS-405A-SS-SC   | 2     | 5                  | 3                                   | –                                       | –                                       | 2  | -10 to 60°C     |
| EDS-405A-SS-SC-T | 2     | 5                  | 3                                   | –                                       | –                                       | 2  | -40 to 75°C     |
| EDS-405A-EIP     | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -10 to 60°C     |
| EDS-405A-EIP-T   | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -40 to 75°C     |
| EDS-405A-PN      | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -10 to 60°C     |
| EDS-405A-PN-T    | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -40 to 75°C     |
| EDS-405A-PTP     | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -10 to 60°C     |
| EDS-405A-PTP-T   | 2     | 5                  | 5                                   | –                                       | –                                       | –  | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-46-01 | Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm |
|----------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|            |   |
|------------|---|
| MXview-50  | Industrial network management software with a license for 50 nodes (by IP address)  |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |

|                   |  |
|-------------------|--|
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 02, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-408A Series

## 8-port entry-level managed Ethernet switches



### Features and Benefits

- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and RSTP/STP for network redundancy
- IGMP Snooping, QoS, IEEE 802.1Q VLAN, and port-based VLAN supported
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- PROFINET or EtherNet/IP enabled by default (PN or EIP models)
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-408A Series is designed especially for industrial applications. The switches support a variety of useful management functions, such as Turbo Ring, Turbo Chain, ring coupling, IGMP snooping, IEEE 802.1Q VLAN, port-based VLAN, QoS, RMON, bandwidth management, port mirroring, and warning by email or relay. The ready-to-use Turbo Ring can be set up easily using the web-based management interface, or with the DIP switches located on the top panel of the EDS-408A switches.

### Additional Features and Benefits

- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, Modbus TCP and PROFINET<sup>1</sup> protocols for device management and monitoring
- EtherNet/IP EDS (Electronic Data Sheet) file, custom AOI (Add-On Instructions) and FactoryTalk® View faceplate available
- PROFINET GSDML file and SIMATIC STEP 7 device icons available<sup>1</sup>
- Port mirroring for online debugging
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p and TOS/DiffServ) to increase determinism
- RMON for proactive and efficient network monitoring
- SNMPv1/v2c/v3 for different levels of network management security
- Bandwidth management to prevent unpredictable network status

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-408A/408A-T, EDS-408A-EIP/PN Series: 8<br>EDS-408A-MM-SC/MM-ST/SS-SC Series: 6<br>EDS-408A-3M-SC/3M-ST/3S-SC/3S-SC-48/1M2S-SC/2M1S-SC Series: 5<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-408A-MM-SC/2M1S-SC Series: 2<br>EDS-408A-3M-SC Series: 3<br>EDS-408A-1M2S-SC Series: 1   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-408A-MM-ST Series: 2<br>EDS-408A-3M-ST Series: 3   |
| 100BaseFX Ports (single-mode SC connector) | EDS-408A-SS-SC/1M2S-SC Series: 2<br>EDS-408A-2M1S-SC Series: 1<br>EDS-408A-3S-SC/3S-SC-48 Series: 3  |

1. EDS-408A-PN Series only



|           |  |
|-----------|--|
| Standards | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1w for Rapid Spanning Tree Protocol |
|-----------|--|

|               |   |                         |            |              |       |
|---------------|---|-------------------------|------------|--------------|-------|
| Optical Fiber |   |                         | 100BaseFX  |              |       |
|               |   |                         | Multi-Mode | Single-Mode  |       |
|               | Fiber Cable Type  |                         | OM1        | 50/125 μm    | G.652 |
|               |   |                         |            | 800 MHz x km |       |
|               | Typical Distance  |                         | 4 km       | 5 km         | 40 km |
|               | Wavelength  | Typical (nm)            |            | 1300         |       |
|               |   | TX Range (nm)           |            | 1260 to 1360 |       |
|               |   | RX Range (nm)           |            | 1100 to 1600 |       |
|               | Optical Power   | TX Range (dBm)          |            | -10 to -20   |       |
|               |   | RX Range (dBm)          |            | -3 to -32    |       |
|               |   | Link Budget (dB)        |            | 12           |       |
|               |   | Dispersion Penalty (dB) |            | 3            |       |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |            |              |       |

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | 802.1Q VLAN, GMRP, GVRP, IGMP v1/v2, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, EDS-408A-PN Series: PROFINET IO Device (Slave)   |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Time Management      | NTP Server/Client, SNTP   |

### Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 10-pin RJ45 (19200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC |
|------------------------|---|

## Power Parameters

|                             |  |
|-----------------------------|--|
| Connection                  | 1 removable 6-contact terminal block(s)  |
| Input Voltage               | All models: Redundant dual inputs<br>EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC/3M-SC/3M-ST/3S-SC/1M2S-SC/<br>2M1S-SC/EIP/PN Series: 12/24/48 VDC<br>EDS-408A-3S-SC-48/408A-3S-SC-48-T: $\pm 24/\pm 48$ VDC |
| Operating Voltage           | EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC/3M-SC/3M-ST/3S-SC/1M2S-SC/<br>2M1S-SC/EIP/PN Series: 9.6 to 60 VDC<br><br>EDS-408A-3S-SC-48 Series:<br>$\pm 19$ to $\pm 60$ VDC <sup>2</sup>                     |
| Input Current               | EDS-408A/408A-T, EDS-408A-EIP/PN Series: 0.18 A @ 24 VDC<br>EDS-408A-MM-SC/MM-ST/SS-SC Series: 0.30 A @ 24 VDC<br>EDS-408A-3M-SC/3M-ST/3S-SC/3S-SC-48/1M2S-SC/2M1S-SC Series: 0.35 A @ 24 VDC                |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |

## Physical Characteristics

|              |   |
|--------------|---|
| Housing      | Metal   |
| IP Rating    | IP30  |
| Dimensions   | 53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)   |
| Weight       | EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC, EDS-408A-EIP/PN Series: 650 g (1.44 lb)<br>EDS-408A-3M-SC/3M-ST/3S-SC/3S-SC-48/1M2S-SC/2M1S-SC Series: 890 g (1.97 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit)  |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: -10 to 60°C (32 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|        |  |
|--------|--|
| Safety | All models: EN 60950-1, UL 508<br>EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC Series, EDS-EIP/PN Series: UL 60950-1  |
| EMC    | EN 55032/24  |
| EMI    | CISPR 32, FCC Part 15B Class A   |
| EMS    | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V |

2. -60 to -19 VDC or 19 to 60 VDC. Do not mix power polarity systems.

|                     |  |
|---------------------|--|
|                     | IEC 61000-4-8 PFMF   |
| Hazardous Locations | EDS-408A/408A-T, EDS-408A-MM-SC/MM-ST/SS-SC Series, EDS-408A-EIP/PN Series: ATEX, Class I Division 2                 |
| Maritime            | EDS-408A/408A-T, EDS-408A-MM/SS Series: NK<br>EDS-408A/408A-T, EDS-408A-MM/SS Series, EDS-408A-EIP/PN Series: DNV-GL |
| Railway             | EN 50121-4   |
| Traffic Control     | NEMA TS2   |
| Freefall            | IEC 60068-2-31   |
| Shock               | IEC 60068-2-27   |
| Vibration           | IEC 60068-2-6  |

#### MTBF

|           |   |
|-----------|---|
| Time      | EDS-408A/408A-T, EDS-408A-EIP/PN Series: 1,339,439 hrs<br>EDS-408A-MM-SC/MM-ST/SS-SC/3M-SC/3M-ST/3S-SC/1M2S-SC/2M1S-SC Series: 1,253,072 hrs<br>EDS-408A-3S-SC-48 Series: 989,940 hrs |
| Standards | Telcordia (Bellcore), GB  |

#### Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

#### Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-408A Series switch  |
| Cable            | 1 x RJ45-to-DB9 console cable   |
| Installation Kit | 4 x cap, plastic, for RJ45 port   |
| Documentation    | 1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

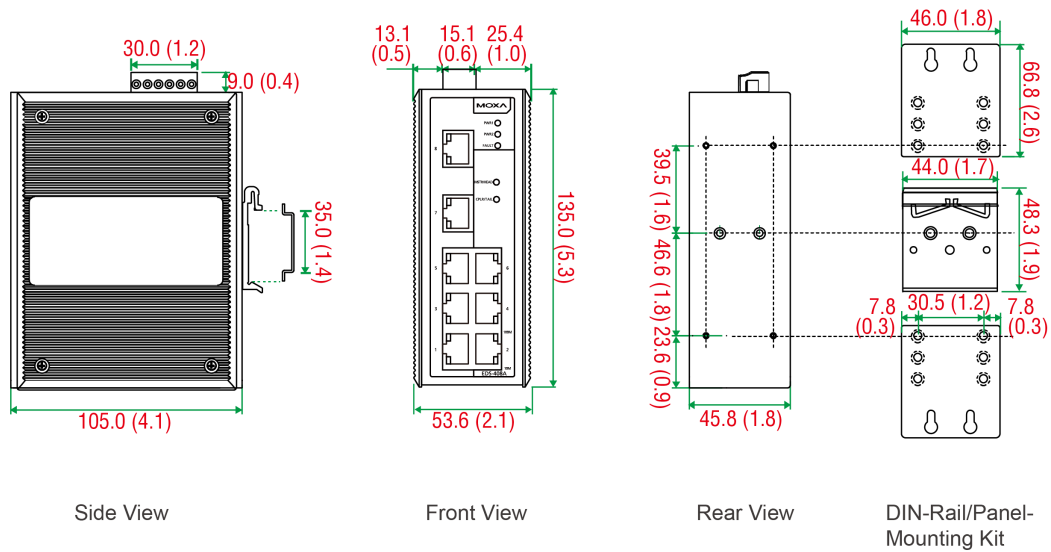

## Ordering Information

| Model Name          | Layer | Total No. of Ports | 10/100BaseT(X) Ports RJ45 Connector | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | Operating Temp. |
|---------------------|-------|--------------------|-------------------------------------|--|--|---|-----------------|
| EDS-408A            | 2     | 8                  | 8                                   | -  | -  | -   | -10 to 60°C     |
| EDS-408A-T          | 2     | 8                  | 8                                   | -  | -  | -   | -40 to 75°C     |
| EDS-408A-MM-ST      | 2     | 8                  | 6                                   | -  | 2  | -   | -10 to 60°C     |
| EDS-408A-MM-ST-T    | 2     | 8                  | 6                                   | -  | 2  | -   | -40 to 75°C     |
| EDS-408A-MM-SC      | 2     | 8                  | 6                                   | 2  | -  | -   | -10 to 60°C     |
| EDS-408A-MM-SC-T    | 2     | 8                  | 6                                   | 2  | -  | -   | -40 to 75°C     |
| EDS-408A-SS-SC      | 2     | 8                  | 6                                   | -  | -  | 2   | -10 to 60°C     |
| EDS-408A-SS-SC-T    | 2     | 8                  | 6                                   | -  | -  | 2   | -40 to 75°C     |
| EDS-408A-3M-ST      | 2     | 8                  | 5                                   | -  | 3  | -   | -10 to 60°C     |
| EDS-408A-3M-ST-T    | 2     | 8                  | 5                                   | -  | 3  | -   | -40 to 75°C     |
| EDS-408A-3M-SC      | 2     | 8                  | 5                                   | 3  | -  | -   | -10 to 60°C     |
| EDS-408A-3M-SC-T    | 2     | 8                  | 5                                   | 3  | -  | -   | -40 to 75°C     |
| EDS-408A-3S-SC      | 2     | 8                  | 5                                   | -  | -  | 3   | -10 to 60°C     |
| EDS-408A-3S-SC-T    | 2     | 8                  | 5                                   | -  | -  | 3   | -40 to 75°C     |
| EDS-408A-3S-SC-48   | 2     | 8                  | 5                                   | -  | -  | 3   | -10 to 60°C     |
| EDS-408A-3S-SC-48-T | 2     | 8                  | 5                                   | -  | -  | 3   | -40 to 75°C     |
| EDS-408A-1M2S-SC    | 2     | 8                  | 5                                   | 1  | -  | 2   | -10 to 60°C     |
| EDS-408A-1M2S-SC-T  | 2     | 8                  | 5                                   | 1  | -  | 2   | -40 to 75°C     |
| EDS-408A-2M1S-SC    | 2     | 8                  | 5                                   | 2  | -  | 1   | -10 to 60°C     |
| EDS-408A-2M1S-SC-T  | 2     | 8                  | 5                                   | 2  | -  | 1   | -40 to 75°C     |

| Model Name     | Layer | Total No. of Ports | 10/100BaseT(X) Ports RJ45 Connector | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | Operating Temp. |
|----------------|-------|--------------------|-------------------------------------|--|--|---|-----------------|
| EDS-408A-EIP   | 2     | 8                  | 8                                   | –  | –  | –   | -10 to 60°C     |
| EDS-408A-EIP-T | 2     | 8                  | 8                                   | –  | –  | –   | -40 to 75°C     |
| EDS-408A-PN    | 2     | 8                  | 8                                   | –  | –  | –   | -10 to 60°C     |
| EDS-408A-PN-T  | 2     | 8                  | 8                                   | –  | –  | –   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-46-01 | Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm |
|----------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-505A Series

## 5-port managed Ethernet switches



### Features and Benefits

- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-505A standalone 5-port managed Ethernet switches, with their advanced Turbo Ring and Turbo Chain technologies (recovery time < 20 ms), RSTP/STP, and MSTP, increase the reliability and availability of your industrial Ethernet network. Models with a wide operating temperature range of -40 to 75°C are also available, and the switches support advanced management and security features, making the EDS-505A switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Lock port function for blocking unauthorized access based on MAC address
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RMON for proactive and efficient network monitoring
- SNMPv1/v2c/v3 for different levels of network management
- Bandwidth management to prevent unpredictable network status
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 2, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 2   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Buttons                | Reset button  |

## Ethernet Interface

|  |  |
|--|--|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-505A/505A-T: 5<br>EDS-505A-MM-SC/MM-ST/SS-SC Series: 3<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-505A-MM-SC Series: 2   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-505A-MM-ST Series: 2   |
| 100BaseFX Ports (single-mode SC connector) | EDS-505A-SS-SC Series: 2   |
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.1X for authentication<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1p for Class of Service<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP |

|               |   |                         |              |                           |              |
|---------------|---|-------------------------|--------------|---------------------------|--------------|
| Optical Fiber |   |                         | 100BaseFX    |                           |              |
|               |   |                         | Multi-Mode   | Single-Mode               |              |
|               | Fiber Cable Type  |                         | OM1          | 50/125 μm<br>800 MHz x km | G.652        |
|               | Typical Distance  |                         | 4 km         | 5 km                      | 40 km        |
|               | Wavelength  | Typical (nm)            | 1300         |                           | 1310         |
|               |   | TX Range (nm)           | 1260 to 1360 |                           | 1280 to 1340 |
|               |   | RX Range (nm)           | 1100 to 1600 |                           | 1100 to 1600 |
|               | Optical Power   | TX Range (dBm)          | -10 to -20   |                           | 0 to -5      |
|               |   | RX Range (dBm)          | -3 to -32    |                           | -3 to -34    |
|               |   | Link Budget (dB)        | 12           |                           | 29           |
|               |   | Dispersion Penalty (dB) | 3            |                           | 1            |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |              |                           |              |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | 802.1Q VLAN, Port-based VLAN, IGMP v1/v2, GVRP, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | IPv4/IPv6, SNMPv1/v2c/v3, LLDP, Port Mirror, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, TFTP |
| MIB                  | MIB-II, Bridge MIB, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | STP, MSTP, RSTP, LACP, Link Aggregation, Turbo Chain, Turbo Ring v1/v2  |

|  |   |
|--|---|
| Security                               | HTTPS/SSL, RADIUS, TACACS+, Port Lock, SSH, Broadcast storm protection                      |
| Time Management                        | NTP Server/Client, SNTP   |
| <b>Switch Properties</b>               |   |
| IGMP Groups                            | 256   |
| MAC Table Size                         | 8 K   |
| Max. No. of VLANs                      | 64  |
| Packet Buffer Size                     | 1 Mbits   |
| Priority Queues                        | 4   |
| VLAN ID Range                          | VID 1 to 4094   |
| <b>LED Interface</b>                   |   |
| LED Indicators                         | PWR1, PWR2, FAULT, 10/100M (TP port), 100M (fiber port), MSTR/HEAD, CPLR/TAIL               |
| <b>Serial Interface</b>                |   |
| Console Port                           | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)  |
| <b>DIP Switch Configuration</b>        |   |
| Ethernet Interface                     | Turbo Ring, Master, Coupler, Reserve  |
| <b>Power Parameters</b>                |   |
| Connection                             | 2 removable 6-contact terminal block(s)   |
| Input Voltage                          | 12/24/48 VDC, Redundant dual inputs   |
| Operating Voltage                      | 9.6 to 60 VDC   |
| Input Current                          | EDS-505A/EDS-505A-T: 0.21 A @ 24 VDC<br>EDS-505A-MM-SC/MM-ST/SS-SC Series: 0.29 A @ 24 VDC  |
| Overload Current Protection            | Supported   |
| Reverse Polarity Protection            | Supported   |
| <b>Physical Characteristics</b>        |   |
| Housing                                | Metal   |
| IP Rating                              | IP30  |
| Dimensions                             | 80.2 x 135 x 105 mm (3.16 x 5.31 x 4.13 in)   |
| Weight                                 | 1040 g (2.3 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |



## Standards and Certifications

|                     |  |
|---------------------|--|
| Safety              | EN 60950-1, UL 60950-1, CSA C22.2 No. 60950-1, UL 508  |
| Hazardous Locations | ATEX, Class I Division 2   |
| EMC                 | EN 55032/24  |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Shock               | IEC 60068-2-27   |
| Freefall            | IEC 60068-2-31   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 1,090,077 hrs            |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-505A Series switch  |
| Cable            | 1 x DB9 female to RJ45 10-pin   |
| Installation Kit | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SC fiber port (-SC models)<br>2 x cap, plastic, for ST fiber port (-ST models)                           |
| Documentation    | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |

## Dimensions

Unit: mm (inch)

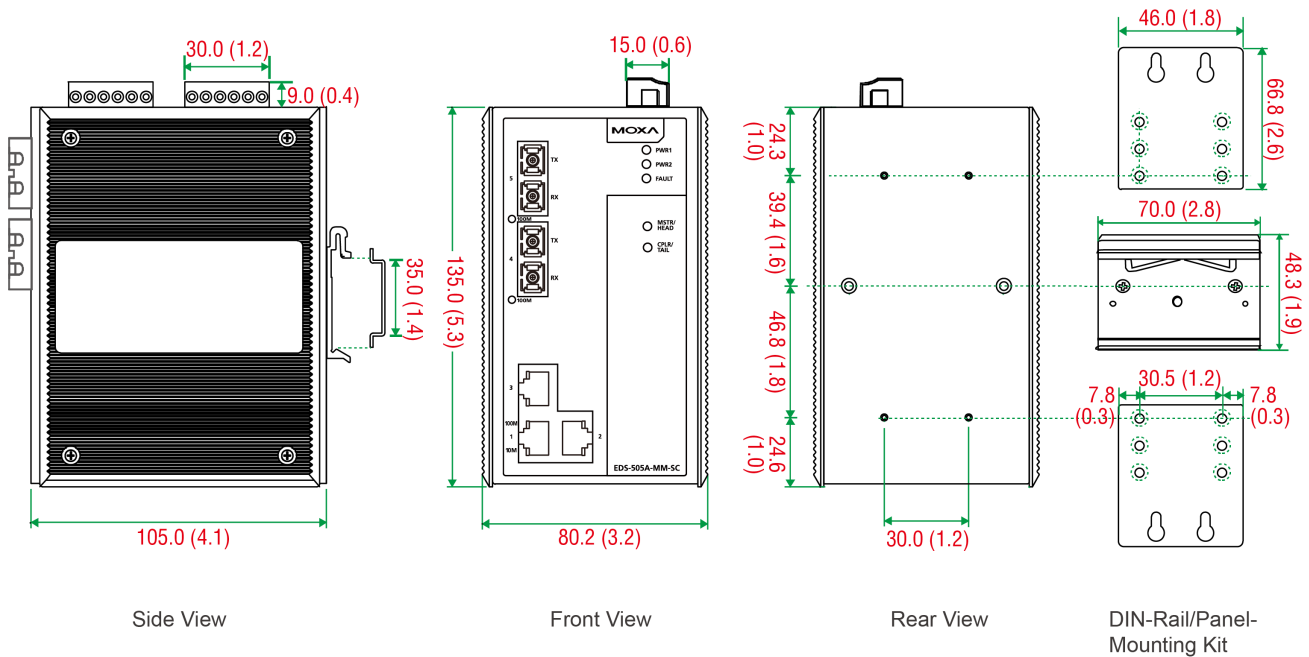

## Ordering Information

| Model Name       | 10/100BaseT(X) Ports RJ45 Connector | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | Operating Temp. |
|------------------|-------------------------------------|--|--|---|-----------------|
| EDS-505A         | 5                                   | –  | –  | –   | -10 to 60°C     |
| EDS-505A-T       | 5                                   | –  | –  | –   | -40 to 75°C     |
| EDS-505A-MM-SC   | 3                                   | 2  | –  | –   | -10 to 60°C     |
| EDS-505A-MM-SC-T | 3                                   | 2  | –  | –   | -40 to 75°C     |
| EDS-505A-MM-ST   | 3                                   | –  | 2  | –   | -10 to 60°C     |
| EDS-505A-MM-ST-T | 3                                   | –  | 2  | –   | -40 to 75°C     |
| EDS-505A-SS-SC   | 3                                   | –  | –  | 2   | -10 to 60°C     |
| EDS-505A-SS-SC-T | 3                                   | –  | –  | 2   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

|           |   |
|-----------|---|
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |
|-----------|---|

#### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Sep 10, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-508A Series

## 8-port managed Ethernet switches



### Features and Benefits

- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-508A standalone 8-port managed Ethernet switches, with their advanced Turbo Ring and Turbo Chain technologies (recovery time < 20 ms), RSTP/STP, and MSTP, increase the reliability and availability of your industrial Ethernet network. Models with a wide operating temperature range of -40 to 75°C are also available, and the switches support advanced management and security features, making the EDS-508A switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Automatic warning by exception through email and relay output
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RMON for proactive and efficient network monitoring
- SNMPv1/v2c/v3 for different levels of network management
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 2, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 2   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Buttons                | Reset button  |

### Ethernet Interface

|   |   |
|---|---|
| 10/100BaseT(X) Ports (RJ45 connector)     | EDS-508A Series: 8<br>EDS-508A-MM/SS Series: 6<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector) | EDS-508A-MM-SC Series: 2  |

|  |   |
|--|---|
| 100BaseFX Ports (multi-mode ST connector)        | EDS-508A-MM-ST Series: 2  |
| 100BaseFX Ports (single-mode SC connector)       | EDS-508A-SS-SC Series: 2  |
| 100BaseFX Ports, Single-Mode SC Connector, 80 km | EDS-508A-SS-SC-80 Series: 2   |
| Standards  | <p>IEEE 802.3 for 10BaseT<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.1X for authentication<br/> IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1s for Multiple Spanning Tree Protocol<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.3x for flow control<br/> IEEE 802.3ad for Port Trunk with LACP</p> |

|               |   |                         |            |              |                     |                     |              |
|---------------|---|-------------------------|------------|--------------|---------------------|---------------------|--------------|
| Optical Fiber |   |                         | 100BaseFX  |              |                     |                     |              |
|               |   |                         | Multi-Mode |              | Single-Mode (40 km) | Single-Mode (80 km) |              |
|               | Fiber Cable Type  |                         | OM1        | 50/125 μm    | G.652               | G.652               |              |
|               |   |                         |            | 800 MHz x km |                     |                     |              |
|               | Typical Distance  |                         | 4 km       | 5 km         | 40 km               | 80 km               |              |
|               | Wave-length   | Typical (nm)            |            | 1300         |                     | 1310                | 1550         |
|               |   | TX Range (nm)           |            | 1260 to 1360 |                     | 1280 to 1340        | 1530 to 1570 |
|               |   | RX Range (nm)           |            | 1100 to 1600 |                     | 1100 to 1600        | 1100 to 1600 |
|               | Optical Power   | TX Range (dBm)          |            | -10 to -20   |                     | 0 to -5             | 0 to -5      |
|               |   | RX Range (dBm)          |            | -3 to -32    |                     | -3 to -34           | -3 to -34    |
|               |   | Link Budget (dB)        |            | 12           |                     | 29                  | 29           |
|               |   | Dispersion Penalty (dB) |            | 3            |                     | 1                   | 1            |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.<br/> Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |            |              |                     |                     |              |

|                                   |   |
|-----------------------------------|---|
| <b>Ethernet Software Features</b> |   |
| Filter                            | 802.1Q VLAN, Port-based VLAN, IGMP v1/v2, GVRP, GMRP  |
| Industrial Protocols              | EtherNet/IP, Modbus TCP   |
| Management                        | IPv4/IPv6, SNMPv1/v2c/v3, LLDP, Port Mirror, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, TFTP |
| MIB                               | MIB-II, Bridge MIB, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols              | STP, MSTP, RSTP, LACP, Link Aggregation, Turbo Chain, Turbo Ring v1/v2  |
| Security                          | HTTPS/SSL, TACACS+, Port Lock, RADIUS, SSH  |
| Time Management                   | NTP Server/Client, SNTP, IEEE 1588v2 PTP (software-based)   |


|                          |     |
|--------------------------|-----|
| <b>Switch Properties</b> |     |
| IGMP Groups              | 256 |
| MAC Table Size           | 8 K |

|  |  |
|--|--|
| Max. No. of VLANs                      | 64   |
| Packet Buffer Size                     | 1 Mbits  |
| Priority Queues                        | 4  |
| VLAN ID Range                          | VID 1 to 4094  |
| <b>LED Interface</b>                   |  |
| LED Indicators                         | PWR1, PWR2, FAULT, 10/100M (TP port), 100M (fiber port), MSTR/HEAD, CPLR/TAIL  |
| <b>Serial Interface</b>                |  |
| Console Port                           | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)   |
| <b>DIP Switch Configuration</b>        |  |
| Ethernet Interface                     | Turbo Ring, Master, Coupler, Reserve   |
| <b>Power Parameters</b>                |  |
| Connection                             | 2 removable 6-contact terminal block(s)  |
| Input Voltage                          | 12/24/48 VDC, Redundant dual inputs  |
| Operating Voltage                      | 9.6 to 60 VDC  |
| Input Current                          | EDS-508A Series: 0.22 A @ 24 VDC<br>EDS-508A-MM/SS Series: 0.30 A @ 24 VDC   |
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| <b>Physical Characteristics</b>        |  |
| Housing                                | Metal  |
| IP Rating                              | IP30   |
| Dimensions                             | 80.2 x 135 x 105 mm (3.16 x 5.31 x 4.13 in)  |
| Weight                                 | 1040 g (2.3 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)   |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Safety                                 | EN 60950-1, UL 60950-1, CSA C22.2 No. 60950-1, UL 508  |
| Hazardous Locations                    | ATEX, Class I Division 2   |
| EMC                                    | EN 55032/24  |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV |

|                         |   |
|-------------------------|---|
|                         | IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF  |
| Shock                   | IEC 60068-2-27  |
| Vibration               | IEC 60068-2-6   |
| Freefall                | IEC 60068-2-31  |
| <b>MTBF</b>             |   |
| Time                    | 1,043,909 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-508A Series switch  |
| Cable                   | 1 x DB9 female to RJ45 10-pin   |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SC fiber port (-SC models)<br>2 x cap, plastic, for ST fiber port (-ST models)                           |
| Documentation           | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |

## Dimensions

Unit: mm (inch)

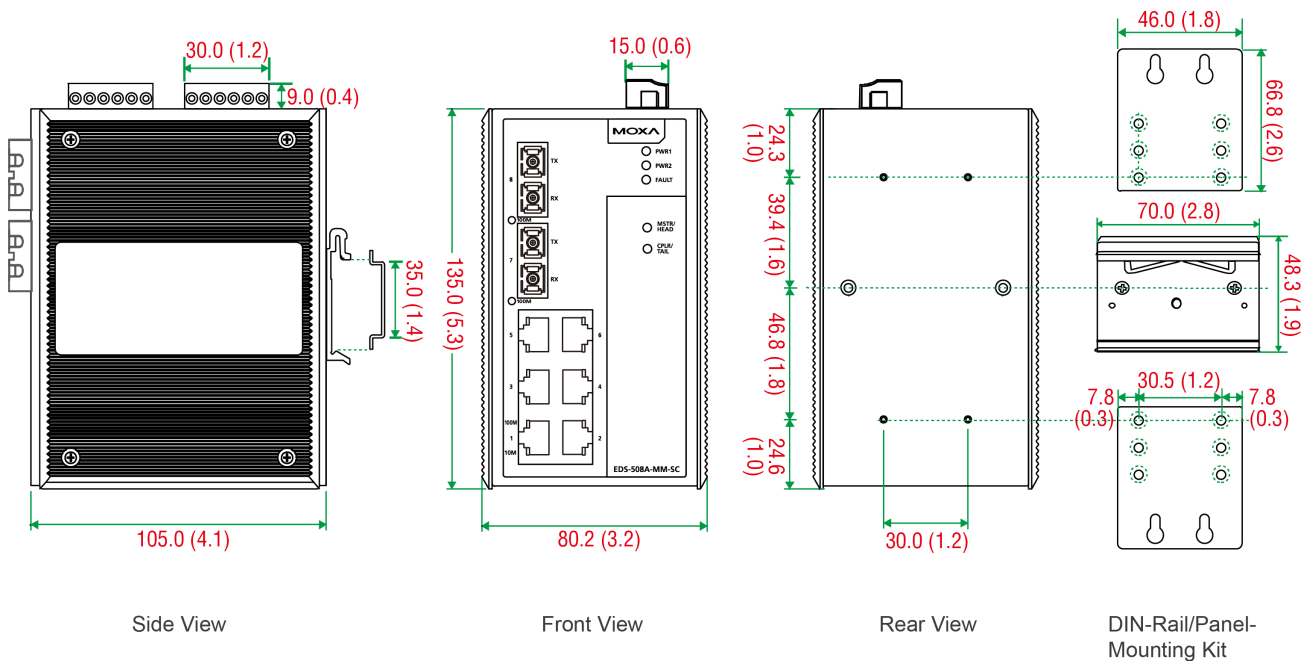

## Ordering Information

| Model Name          | 10/100BaseT(X) Ports, RJ45 Connector | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | 100BaseFX Ports Single-Mode, SC Connector, 80 km | Operating Temp. |
|---------------------|--------------------------------------|--|--|---|--|-----------------|
| EDS-508A            | 8                                    | –  | –  | –   | –  | -10 to 60°C     |
| EDS-508A-T          | 8                                    | –  | –  | –   | –  | -40 to 75°C     |
| EDS-508A-MM-SC      | 6                                    | 2  | –  | –   | –  | -10 to 60°C     |
| EDS-508A-MM-SC-T    | 6                                    | 2  | –  | –   | –  | -40 to 75°C     |
| EDS-508A-MM-ST      | 6                                    | –  | 2  | –   | –  | -10 to 60°C     |
| EDS-508A-MM-ST-T    | 6                                    | –  | 2  | –   | –  | -40 to 75°C     |
| EDS-508A-SS-SC      | 6                                    | –  | –  | 2   | –  | -10 to 60°C     |
| EDS-508A-SS-SC-T    | 6                                    | –  | –  | 2   | –  | -40 to 75°C     |
| EDS-508A-SS-SC-80   | 6                                    | –  | –  | –   | 2  | -10 to 60°C     |
| EDS-508A-SS-SC-80-T | 6                                    | –  | –  | –   | 2  | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |



© Moxa Inc. All rights reserved. Updated Sep 10, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-510A Series

## 7+3G-port Gigabit managed Ethernet switches



### Features and Benefits

- 2 Gigabit Ethernet ports for redundant ring and 1 Gigabit Ethernet port for uplink solution
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01

### Certifications



## Introduction

The EDS-510A Gigabit managed redundant Ethernet switches are equipped with up to 3 Gigabit Ethernet ports, making them ideal for building a Gigabit Turbo Ring, but leaving a spare Gigabit port for uplink use. The Ethernet redundancy technologies, Turbo Ring and Turbo Chain (recovery time < 20 ms), RSTP/STP, and MSTP, can increase system reliability and the availability of your network backbone.

The EDS-510A Series is designed especially for communication demanding applications such as process control, shipbuilding, ITS, and DCS systems, which can benefit from a scalable backbone construction.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 2, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 2   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Buttons                | Reset button  |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

|  |   |
|--|---|
| 10/100BaseT(X) Ports (RJ45 connector)      | 7<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection   |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | EDS-510A-1GT2SFP Series: 1<br>EDS-510A-3GT Series: 3<br><br>Supported functions:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| 1000BaseSFP Slots                          | EDS-510A-1GT2SFP Series: 2<br>EDS-510A-3SFP Series: 3   |
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.1X for authentication<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1p for Class of Service<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | 802.1Q VLAN, Port-based VLAN, IGMP v1/v2, GVRP, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | IPv4/IPv6, SNMPv1/v2c/v3, LLDP, Port Mirror, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, TFTP |
| MIB                  | MIB-II, Bridge MIB, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | STP, MSTP, RSTP, LACP, Link Aggregation, Turbo Chain, Turbo Ring v1/v2  |
| Security             | HTTPS/SSL, RADIUS, TACACS+, Port Lock, SSH  |
| Time Management      | NTP Server/Client, SNTP   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, FAULT, 10/100M (TP port), 1000M (Gigabit port), MSTR/HEAD, CPLR/TAIL |
|----------------|--|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 6-contact terminal block(s)   |
| Input Current               | EDS-510A-1GT2SFP Series: 0.38 A @ 24 VDC<br>EDS-510A-3GT Series: 0.55 A @ 24 VDC<br>EDS-510A-3SFP Series: 0.39 A @ 24 VDC |
| Input Voltage               | 24 VDC, Redundant dual inputs   |
| Operating Voltage           | 12 to 45 VDC  |
| Overload Current Protection | Supported   |
| Reverse Polarity Protection | Supported   |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 80.2 x 135 x 105 mm (3.16 x 5.31 x 4.13 in)          |
| Weight       | 1170 g (2.58 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |  |
|---------------------|--|
| Safety              | EN 60950-1, UL 60950-1, CSA C22.2 No. 60950-1, UL 508  |
| Hazardous Locations | ATEX, Class I Division 2   |
| EMC                 | EN 55032/24  |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Traffic Control     | NEMA TS2   |
| Shock               | IEC 60068-2-27   |
| Freefall            | IEC 60068-2-31   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 204,901 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-510A Series switch  |
| Cable            | 1 x DB9 female to RJ45 10-pin   |
| Installation Kit | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SC fiber port (-1GT2SFP models)<br>2 x cap, plastic, for ST fiber port (-3SFP models)                    |
| Documentation    | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note             | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

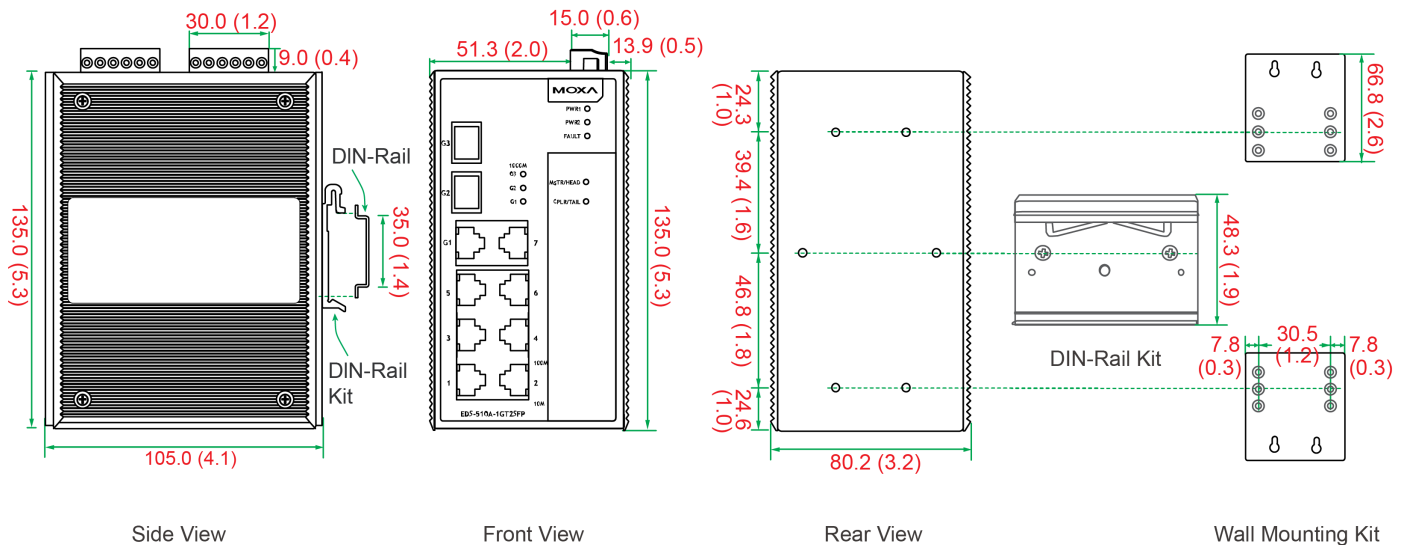

## Ordering Information

| Model Name         | 10/100BaseT(X) Ports<br>RJ45 Connector | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | 1000Base SFP Slots | Operating Temp. |
|--------------------|--|---|--------------------|-----------------|
| EDS-510A-3GT       | 7                                      | 3   | -                  | -10 to 60°C     |
| EDS-510A-3GT-T     | 7                                      | 3   | -                  | -40 to 75°C     |
| EDS-510A-3SFP      | 7                                      | -   | 3                  | -10 to 60°C     |
| EDS-510A-3SFP-T    | 7                                      | -   | 3                  | -40 to 75°C     |
| EDS-510A-1GT2SFP   | 7                                      | 1   | 2                  | -10 to 60°C     |
| EDS-510A-1GT2SFP-T | 7                                      | 1   | 2                  | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC      | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T    | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXC       | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXC-T     | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, -40 to 85°C operating temperature   |
| SFP-1GSXC       | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature                                       |
| SFP-1GSXC-T     | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                     |

|              |   |
|--------------|---|
| SFP-1GZXLC   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature   |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |

#### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

#### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Sep 10, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-510E Series

## 7+3G-port Gigabit managed Ethernet switches



### Features and Benefits

- 3 Gigabit Ethernet ports for redundant ring or uplink solutions
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, SNMPv3, IEEE 802.1x, HTTPS, SSH, and sticky MAC address to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The EDS-510E Gigabit managed Ethernet switches are designed to meet rigorous mission-critical applications, such as factory automation, ITS, and process control. The 3 Gigabit Ethernet ports allow great flexibility to build up a Gigabit redundant Turbo Ring and a Gigabit uplink. The switches have USB interfaces for switch configuration, system file backup, and firmware upgrade, making them easier to manage.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Configurable by web browser, Telnet/USB console, CLI, MXconfig, and ABC-02-USB automatic backup configurator
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

1. Gigabit Ethernet recovery time < 50 ms



## Ethernet Interface

|   |   |
|---|---|
| 10/100BaseT(X) Ports (RJ45 connector)                 | 7<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection   |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 3   |
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, Port-based VLAN, GVRP, IGMP v1/v2/v3, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, SMTP with TLS  |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), Gigabit combo port, MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 4-contact terminal block(s) |
| Input Current               | 0.58 A @ 24 VDC                         |
| Input Voltage               | 12/24/48/-48 VDC, Redundant dual inputs |
| Operating Voltage           | 9.6 to 60 VDC                           |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 79.2 x 135 x 116 mm (3.12 x 5.31 x 4.57 in)          |
| Weight       | 1690 g (3.73 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-510E-3GTXSFP: -10 to 60°C (14 to 140°F)<br>EDS-510E-3GTXSFP-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |


## Standards and Certifications

|                     |   |
|---------------------|---|
| Safety              | UL 508  |
| EMC                 | EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A  |
| EMS                 | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2  |
| Maritime            | DNV-GL, LR, ABS, NK   |
| Power Substation    | IEC 61850-3, IEEE 1613  |
| Railway             | EN 50121-4  |
| Traffic Control     | NEMA TS2  |
| Shock               | IEC 60068-2-27  |

|                         |   |
|-------------------------|---|
| Freefall                | IEC 60068-2-32  |
| Vibration               | IEC 60068-2-6   |
| <b>MTBF</b>             |   |
| Time                    | 725,532 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-510E Series switch  |
| Cable                   | 1 x USB type A male to USB type B male  |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>3 x cap, plastic, for SFP slot   |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note                    | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

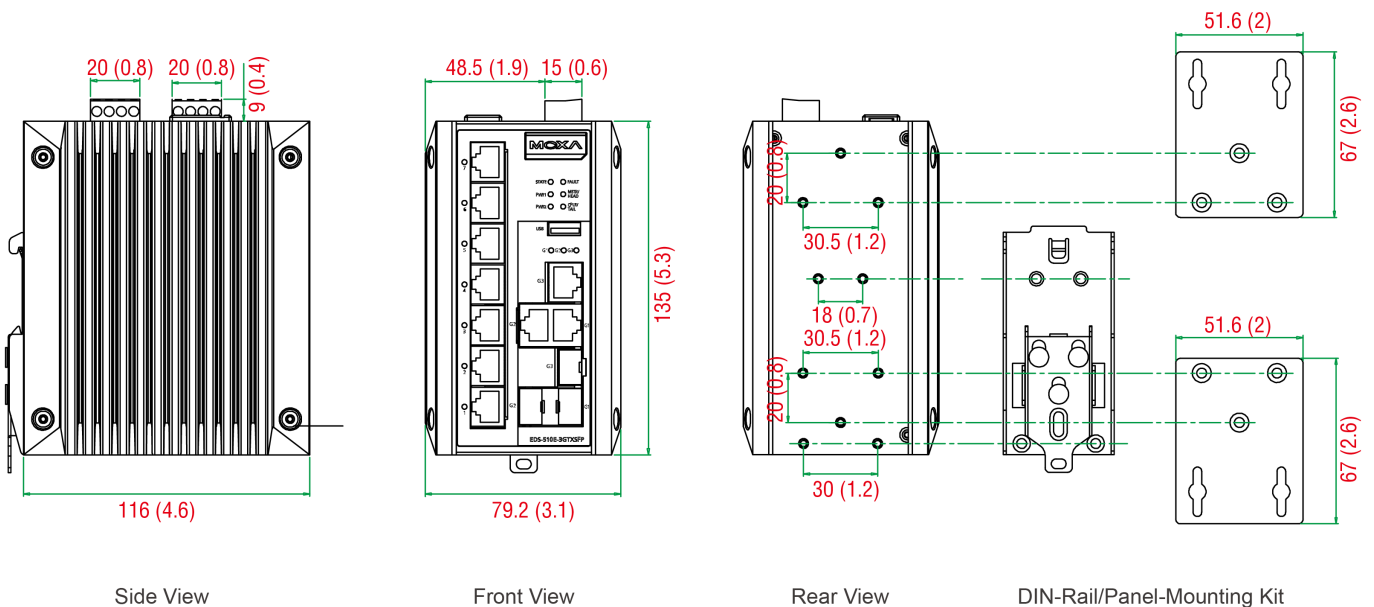

## Ordering Information

| Model Name         | 10/100BaseT(X) Ports<br>RJ45 Connector | Combo Ports<br>10/100/1000BaseT(X) or 100/<br>1000BaseSFP | Operating Temp. |
|--------------------|--|---|-----------------|
| EDS-510E-3GTXSFP   | 7                                      | 3   | -10 to 60°C     |
| EDS-510E-3GTXSFP-T | 7                                      | 3   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |

|              |   |
|--------------|---|
| SFP-1GLXLC   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

#### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-51-01 | Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm |
|----------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-510E Series

## 7+3G-port Gigabit managed Ethernet switches



### Features and Benefits

- 3 Gigabit Ethernet ports for redundant ring or uplink solutions
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, SNMPv3, IEEE 802.1x, HTTPS, SSH, and sticky MAC address to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The EDS-510E Gigabit managed Ethernet switches are designed to meet rigorous mission-critical applications, such as factory automation, ITS, and process control. The 3 Gigabit Ethernet ports allow great flexibility to build up a Gigabit redundant Turbo Ring and a Gigabit uplink. The switches have USB interfaces for switch configuration, system file backup, and firmware upgrade, making them easier to manage.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Configurable by web browser, Telnet/USB console, CLI, MXconfig, and ABC-02-USB automatic backup configurator
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

|   |   |
|---|---|
| 10/100BaseT(X) Ports (RJ45 connector)                 | 7<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection   |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 3   |
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, Port-based VLAN, GVRP, IGMP v1/v2/v3, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, SMTP with TLS  |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), Gigabit combo port, MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 4-contact terminal block(s) |
| Input Current               | 0.58 A @ 24 VDC                         |
| Input Voltage               | 12/24/48/-48 VDC, Redundant dual inputs |
| Operating Voltage           | 9.6 to 60 VDC                           |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 79.2 x 135 x 116 mm (3.12 x 5.31 x 4.57 in)          |
| Weight       | 1690 g (3.73 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-510E-3GTXSFP: -10 to 60°C (14 to 140°F)<br>EDS-510E-3GTXSFP-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications


|                     |   |
|---------------------|---|
| Safety              | UL 508  |
| EMC                 | EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A  |
| EMS                 | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2  |
| Maritime            | DNV-GL, LR, ABS, NK   |
| Power Substation    | IEC 61850-3, IEEE 1613  |
| Railway             | EN 50121-4  |
| Traffic Control     | NEMA TS2  |
| Shock               | IEC 60068-2-27  |



|                         |   |
|-------------------------|---|
| Freefall                | IEC 60068-2-32  |
| Vibration               | IEC 60068-2-6   |
| <b>MTBF</b>             |   |
| Time                    | 725,532 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-510E Series switch  |
| Cable                   | 1 x USB type A male to USB type B male  |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>3 x cap, plastic, for SFP slot   |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note                    | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

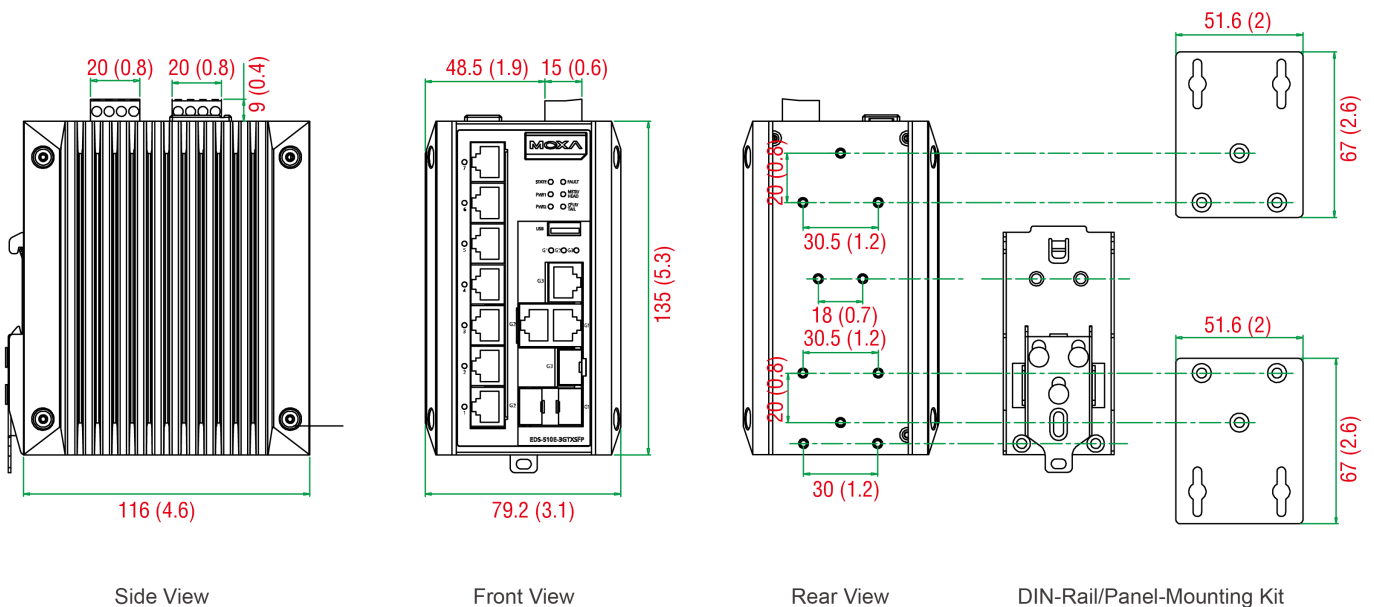

## Ordering Information

| Model Name         | 10/100BaseT(X) Ports<br>RJ45 Connector | Combo Ports<br>10/100/1000BaseT(X) or 100/<br>1000BaseSFP | Operating Temp. |
|--------------------|--|---|-----------------|
| EDS-510E-3GTXSFP   | 7                                      | 3   | -10 to 60°C     |
| EDS-510E-3GTXSFP-T | 7                                      | 3   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |

|              |   |
|--------------|---|
| SFP-1GLXLC   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

#### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-51-01 | Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm |
|----------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-516A Series

## 16-port managed Ethernet switches



### Features and Benefits

- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-516A standalone 16-port managed Ethernet switches, with their advanced Turbo Ring and Turbo Chain technologies (recovery time < 20 ms), RSTP/STP, and MSTP, increase the reliability and availability of your industrial Ethernet network. Models with a wide operating temperature range of -40 to 75°C are also available, and the switches support advanced management and security features, making the EDS-516A switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Lock port function for blocking unauthorized access based on MAC address
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RMON for proactive and efficient network monitoring
- SNMPv1/v2c/v3 for different levels of network management
- Bandwidth management to prevent unpredictable network status
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Resistive load: 1 A @ 24 VDC  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

### Ethernet Interface

|   |   |
|---|---|
| 10/100BaseT(X) Ports (RJ45 connector)     | EDS-516A Series: 16<br>EDS-516A-MM-SC/MM-ST Series: 14<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector) | EDS-516A-MM-SC Series: 2  |
| 100BaseFX Ports (multi-mode ST connector) | EDS-516A-MM-ST Series: 2  |

| Optical Fiber   |                         | 100BaseFX    |                |                        |                        |
|---|-------------------------|--------------|----------------|------------------------|------------------------|
|   |                         | Multi-Mode   |                | Single-Mode<br>(40 km) | Single-Mode<br>(80 km) |
| Fiber Cable Type  |                         | OM1          | 50/125 $\mu$ m | G.652                  | G.652                  |
|   |                         |              | 800 MHz x km   |                        |                        |
| Typical Distance  |                         | 4 km         | 5 km           | 40 km                  | 80 km                  |
| Wave-length   | Typical (nm)            | 1300         |                | 1310                   | 1550                   |
|   | TX Range (nm)           | 1260 to 1360 |                | 1280 to 1340           | 1530 to 1570           |
|   | RX Range (nm)           | 1100 to 1600 |                | 1100 to 1600           | 1100 to 1600           |
| Optical Power   | TX Range (dBm)          | -10 to -20   |                | 0 to -5                | 0 to -5                |
|   | RX Range (dBm)          | -3 to -32    |                | -3 to -34              | -3 to -34              |
|   | Link Budget (dB)        | 12           |                | 29                     | 29                     |
|   | Dispersion Penalty (dB) | 3            |                | 1                      | 1                      |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |              |                |                        |                        |

|           |  |
|-----------|--|
| Standards | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.1X for authentication<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1p for Class of Service<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP |
|-----------|--|

| Ethernet Software Features |  |
|----------------------------|--|
| Filter                     | 802.1Q VLAN, GMRP, GVRP, IGMP v1/v2, Port-based VLAN   |
| Industrial Protocols       | EtherNet/IP, Modbus TCP  |
| Management                 | IPv4/IPv6, SNMPv1/v2c/v3, LLDP, Port Mirror, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, TFTP |
| MIB                        | MIB-II, Bridge MIB, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols       | STP, MSTP, RSTP, LACP, Link Aggregation, Turbo Chain, Turbo Ring v1/v2   |
| Security                   | HTTPS/SSL, RADIUS, TACACS+, Port Lock, SSH, Broadcast storm protection   |
| Time Management            | NTP Server/Client, SNTP, IEEE 1588v2 PTP (software-based)  |


| Switch Properties  |         |
|--------------------|---------|
| IGMP Groups        | 256     |
| MAC Table Size     | 8 K     |
| Max. No. of VLANs  | 64      |
| Packet Buffer Size | 2 Mbits |

|  |  |
|--|--|
| Priority Queues                        | 4  |
| VLAN ID Range                          | VID 1 to 4094  |
| <b>LED Interface</b>                   |  |
| LED Indicators                         | PWR1, PWR2, FAULT, 10/100M (TP port), 100M (fiber port), MSTR/HEAD, CPLR/TAIL  |
| <b>Serial Interface</b>                |  |
| Console Port                           | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)   |
| <b>DIP Switch Configuration</b>        |  |
| Ethernet Interface                     | Turbo Ring, Master, Coupler, Reserve   |
| <b>Power Parameters</b>                |  |
| Connection                             | 2 removable 6-contact terminal block(s)  |
| Input Voltage                          | 24 VDC, Redundant dual inputs  |
| Operating Voltage                      | 12 to 45 VDC   |
| Input Current                          | EDS-516A Series: 0.35 A @ 24 VDC<br>EDS-516A-MM-SC/MM-ST Series: 0.44 A @ 24 VDC   |
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| <b>Physical Characteristics</b>        |  |
| Housing                                | Metal  |
| IP Rating                              | IP30   |
| Dimensions                             | 94 x 135 x 142.7 mm (3.7 x 5.31 x 5.62 in)   |
| Weight                                 | 1586 g (3.50 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)   |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | Standard Models: 0 to 60°C (32 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Safety                                 | EN 60950-1, UL 60950-1, CSA C22.2 No. 60950-1, UL 508  |
| Hazardous Locations                    | ATEX, Class I Division 2   |
| EMC                                    | EN 55032/24  |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                               | DNV-GL   |

|                         |   |
|-------------------------|---|
| Shock                   | IEC 60068-2-27  |
| Vibration               | IEC 60068-2-6   |
| Freefall                | IEC 60068-2-31  |
| <b>MTBF</b>             |   |
| Time                    | 247,676 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-516A Series switch  |
| Cable                   | 1 x DB9 female to RJ45 10-pin   |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SC fiber port (-SC models)<br>2 x cap, plastic, for ST fiber port (-ST models)   |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |

## Dimensions

Unit: mm (inch)

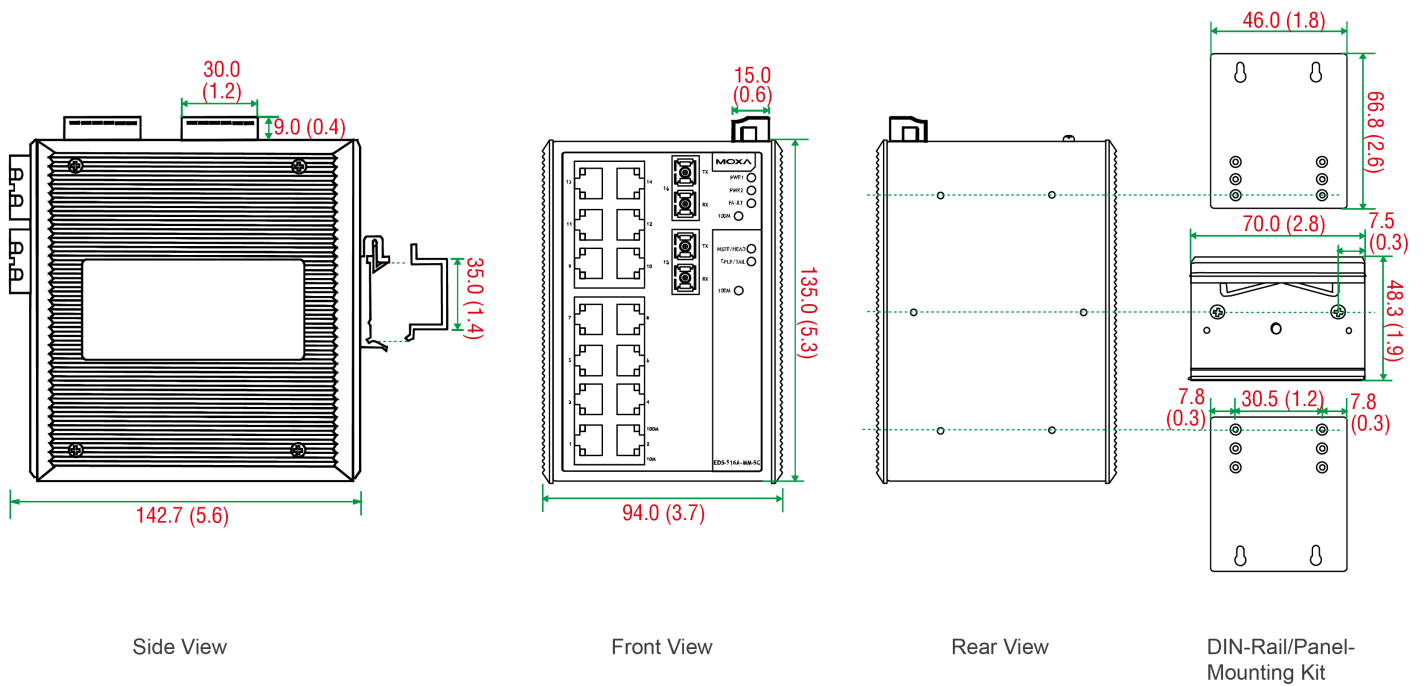

## Ordering Information

| Model Name       | 10/100BaseT(X) Ports<br>RJ45 Connector | 100BaseFX Ports<br>Multi-Mode, SC Connector | 100BaseFX Ports<br>Multi-Mode, ST Connector | Operating Temp. |
|------------------|--|---|---|-----------------|
| EDS-516A         | 16                                     | –   | –   | 0 to 60°C       |
| EDS-516A-T       | 16                                     | –   | –   | -40 to 75°C     |
| EDS-516A-MM-SC   | 14                                     | 2   | –   | 0 to 60°C       |
| EDS-516A-MM-SC-T | 14                                     | 2   | –   | -40 to 75°C     |
| EDS-516A-MM-ST   | 14                                     | –   | 2   | 0 to 60°C       |
| EDS-516A-MM-ST-T | 14                                     | –   | 2   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.



# EDS-518A Series

## 16+2G-port Gigabit managed Ethernet switches



### Features and Benefits

- 2 Gigabit plus 16 Fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01

### Certifications



## Introduction

The EDS-518A standalone 18-port managed Ethernet switches provide 2 combo Gigabit ports with built-in RJ45 or SFP slots for Gigabit fiber-optic communication. The Ethernet redundancy technologies Turbo Ring and Turbo Chain (recovery time < 20 ms) increase the reliability and speed of your network backbone. The EDS-518A switches also support advanced management and security features.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Supports the ABC-01-USB (Automatic Backup Configurator) for system configuration backup
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Resistive load: 1 A @ 24 VDC  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

### Ethernet Interface

|   |  |
|---|--|
| 10/100BaseT(X) Ports (RJ45 connector)     | EDS-518A/518A-T: 16<br>EDS-518A-MM-SC/MM-ST/SS-SC Series: 14<br>EDS-518A-SS-SC-80: 14<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector) | EDS-518A-MM-SC Series: 2   |

1. Gigabit Ethernet recovery time < 50 ms

|  |                             |
|--|-----------------------------|
| 100BaseFX Ports (multi-mode ST connector)        | EDS-518A-MM-ST Series: 2    |
| 100BaseFX Ports (single-mode SC connector)       | EDS-518A-SS-SC Series: 2    |
| 100BaseFX Ports, Single-Mode SC Connector, 80 km | EDS-518A-SS-SC-80 Series: 2 |
| Combo Ports (10/100/1000BaseT(X) or 1000BaseSFP) | 2                           |

|   |                  |                         |            |              |       |
|---|------------------|-------------------------|------------|--------------|-------|
| Optical Fiber   |                  |                         | 100BaseFX  |              |       |
|   |                  |                         | Multi-Mode | Single-Mode  |       |
|   | Fiber Cable Type |                         | OM1        | 50/125 μm    | G.652 |
|   |                  |                         |            | 800 MHz x km |       |
|   | Typical Distance |                         | 4 km       | 5 km         | 40 km |
|   | Wavelength       | Typical (nm)            |            | 1300         |       |
|   |                  | TX Range (nm)           |            | 1260 to 1360 |       |
|   |                  | RX Range (nm)           |            | 1100 to 1600 |       |
|   | Optical Power    | TX Range (dBm)          |            | -10 to -20   |       |
|   |                  | RX Range (dBm)          |            | -3 to -32    |       |
|   |                  | Link Budget (dB)        |            | 12           |       |
|   |                  | Dispersion Penalty (dB) |            | 3            |       |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                  |                         |            |              |       |

|           |  |
|-----------|--|
| Standards | <p>IEEE 802.3 for 10BaseT<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.3ab for 1000BaseT(X)<br/> IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br/> IEEE 802.1X for authentication<br/> IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1s for Multiple Spanning Tree Protocol<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.3x for flow control<br/> IEEE 802.3ad for Port Trunk with LACP</p> |
|-----------|--|

|                            |  |
|----------------------------|--|
| Ethernet Software Features |  |
| Filter                     | 802.1Q VLAN, Port-based VLAN, IGMP v1/v2, GVRP, GMRP   |
| Industrial Protocols       | EtherNet/IP, Modbus TCP  |
| Management                 | IPv4/IPv6, SNMPv1/v2c/v3, LLDP, Port Mirror, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, TFTP |
| MIB                        | MIB-II, Bridge MIB, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols       | STP, MSTP, RSTP, LACP, Link Aggregation, Turbo Chain, Turbo Ring v1/v2   |
| Security                   | HTTPS/SSL, TACACS+, Port Lock, RADIUS, SSH, Broadcast storm protection   |
| Time Management            | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 2 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, 10/100M (TP port), 100M (fiber port), 1000M (Gigabit port), MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |  |
|-----------------------------|--|
| Connection                  | 2 removable 6-contact terminal block(s)  |
| Input Current               | EDS-518A/518A-T: 0.44 A @ 24 VDC<br>EDS-518A-MM-SC/MM-ST/SS-SC Series: 0.52 A @ 24 VDC<br>EDS-518A-SS-SC-80: 0.52 A @ 24 VDC |
| Input Voltage               | 24 VDC, Redundant dual inputs  |
| Operating Voltage           | 12 to 45 VDC   |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 94 x 135 x 142.7 mm (3.7 x 5.31 x 5.62 in)           |
| Weight       | 1630 g (3.60 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: 0 to 60°C (32 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |


## Standards and Certifications

|                     |   |
|---------------------|---|
| Safety              | EN 60950-1, UL 60950-1, CSA C22.2 No. 60950-1, UL 508 |
| Hazardous Locations | ATEX, Class I Division 2                              |
| EMC                 | EN 55032/24   |

|                         |  |
|-------------------------|--|
| EMI                     | CISPR 32, FCC Part 15B Class A   |
| EMS                     | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                | DNV-GL, NK   |
| Shock                   | IEC 60068-2-27   |
| Vibration               | IEC 60068-2-6  |
| Freefall                | IEC 60068-2-31   |
| <b>MTBF</b>             |  |
| Time                    | 250,966 hrs  |
| Standards               | Telcordia (Bellcore), GB   |
| <b>Warranty</b>         |  |
| Warranty Period         | 5 years  |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |
| <b>Package Contents</b> |  |
| Device                  | 1 x EDS-518A Series switch   |
| Cable                   | 1 x DB9 female to RJ45 10-pin  |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SFP slot<br>2 x cap, plastic, for SC fiber port (-SC models)<br>2 x cap, plastic, for ST fiber port (-ST models)  |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese  |
| Note                    | SFP modules need to be purchased separately for use with this product.   |

## Dimensions

Unit: mm (inch)

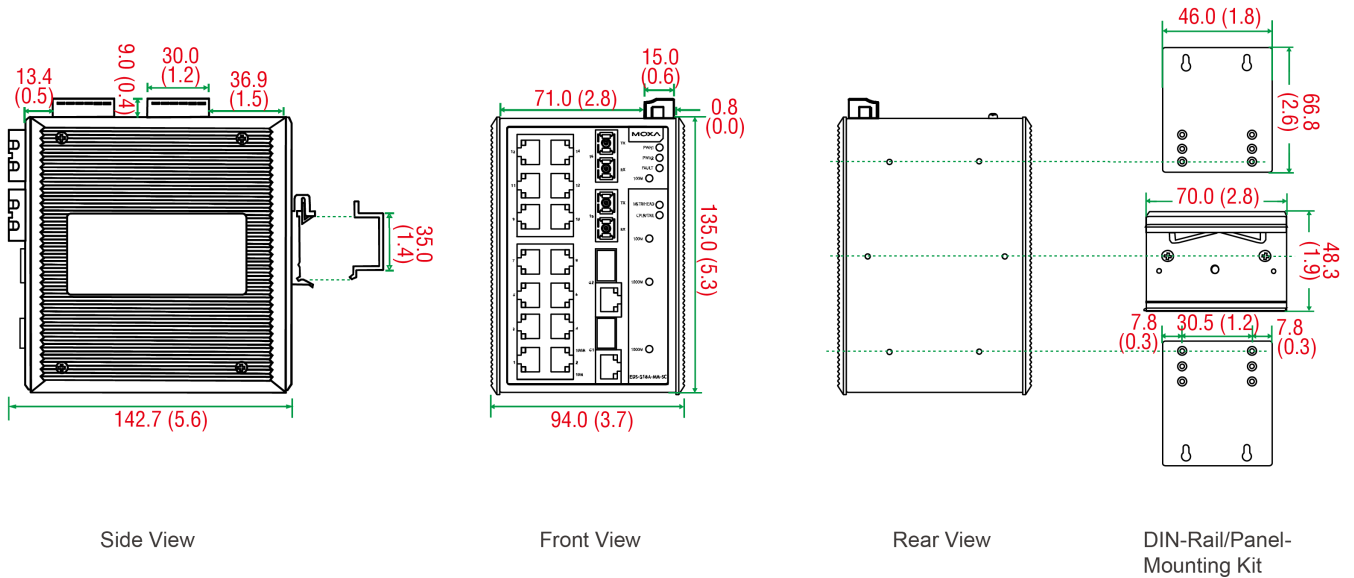

## Ordering Information

| Model Name        | 10/100BaseT(X) Ports RJ45 Connector | Combo Ports 10/100/1000BaseT(X) or 1000BaseSFP | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | 100BaseFX Ports Single-Mode, SC Connector, 80 km | Operating Temp. |
|-------------------|-------------------------------------|--|--|--|---|--|-----------------|
| EDS-518A          | 16                                  | 2  | -  | -  | -   | -  | 0 to 60°C       |
| EDS-518A-T        | 16                                  | 2  | -  | -  | -   | -  | -40 to 75°C     |
| EDS-518A-MM-SC    | 14                                  | 2  | 2  | -  | -   | -  | 0 to 60°C       |
| EDS-518A-MM-SC-T  | 14                                  | 2  | 2  | -  | -   | -  | -40 to 75°C     |
| EDS-518A-MM-ST    | 14                                  | 2  | -  | 2  | -   | -  | 0 to 60°C       |
| EDS-518A-MM-ST-T  | 14                                  | 2  | -  | 2  | -   | -  | -40 to 75°C     |
| EDS-518A-SS-SC    | 14                                  | 2  | -  | -  | 2   | -  | 0 to 60°C       |
| EDS-518A-SS-SC-T  | 14                                  | 2  | -  | -  | 2   | -  | -40 to 75°C     |
| EDS-518A-SS-SC-80 | 14                                  | 2  | -  | -  | -   | 2  | 0 to 60°C       |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### SFP Modules

|               |  |
|---------------|--|
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |

|                |  |
|----------------|--|
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

## Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

## Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

## Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

## Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-518A Series

## 16+2G-port Gigabit managed Ethernet switches



### Features and Benefits

- 2 Gigabit plus 16 Fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01

### Certifications



## Introduction

The EDS-518A standalone 18-port managed Ethernet switches provide 2 combo Gigabit ports with built-in RJ45 or SFP slots for Gigabit fiber-optic communication. The Ethernet redundancy technologies Turbo Ring and Turbo Chain (recovery time < 20 ms) increase the reliability and speed of your network backbone. The EDS-518A switches also support advanced management and security features.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Supports the ABC-01-USB (Automatic Backup Configurator) for system configuration backup
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Resistive load: 1 A @ 24 VDC  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

### Ethernet Interface

|   |  |
|---|--|
| 10/100BaseT(X) Ports (RJ45 connector)     | EDS-518A/518A-T: 16<br>EDS-518A-MM-SC/MM-ST/SS-SC Series: 14<br>EDS-518A-SS-SC-80: 14<br><br>All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector) | EDS-518A-MM-SC Series: 2   |

1. Gigabit Ethernet recovery time < 50 ms



|  |                             |
|--|-----------------------------|
| 100BaseFX Ports (multi-mode ST connector)        | EDS-518A-MM-ST Series: 2    |
| 100BaseFX Ports (single-mode SC connector)       | EDS-518A-SS-SC Series: 2    |
| 100BaseFX Ports, Single-Mode SC Connector, 80 km | EDS-518A-SS-SC-80 Series: 2 |
| Combo Ports (10/100/1000BaseT(X) or 1000BaseSFP) | 2                           |

|   |                  |                         |            |              |       |
|---|------------------|-------------------------|------------|--------------|-------|
| Optical Fiber   |                  |                         | 100BaseFX  |              |       |
|   |                  |                         | Multi-Mode | Single-Mode  |       |
|   | Fiber Cable Type |                         | OM1        | 50/125 μm    | G.652 |
|   |                  |                         |            | 800 MHz x km |       |
|   | Typical Distance |                         | 4 km       | 5 km         | 40 km |
|   | Wavelength       | Typical (nm)            |            | 1300         |       |
|   |                  | TX Range (nm)           |            | 1260 to 1360 |       |
|   |                  | RX Range (nm)           |            | 1100 to 1600 |       |
|   | Optical Power    | TX Range (dBm)          |            | -10 to -20   |       |
|   |                  | RX Range (dBm)          |            | -3 to -32    |       |
|   |                  | Link Budget (dB)        |            | 12           |       |
|   |                  | Dispersion Penalty (dB) |            | 3            |       |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                  |                         |            |              |       |

|           |  |
|-----------|--|
| Standards | <p>IEEE 802.3 for 10BaseT<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.3ab for 1000BaseT(X)<br/> IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br/> IEEE 802.1X for authentication<br/> IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1s for Multiple Spanning Tree Protocol<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.3x for flow control<br/> IEEE 802.3ad for Port Trunk with LACP</p> |
|-----------|--|

|                            |  |
|----------------------------|--|
| Ethernet Software Features |  |
| Filter                     | 802.1Q VLAN, Port-based VLAN, IGMP v1/v2, GVRP, GMRP   |
| Industrial Protocols       | EtherNet/IP, Modbus TCP  |
| Management                 | IPv4/IPv6, SNMPv1/v2c/v3, LLDP, Port Mirror, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, TFTP |
| MIB                        | MIB-II, Bridge MIB, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols       | STP, MSTP, RSTP, LACP, Link Aggregation, Turbo Chain, Turbo Ring v1/v2   |
| Security                   | HTTPS/SSL, TACACS+, Port Lock, RADIUS, SSH, Broadcast storm protection   |
| Time Management            | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 2 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, 10/100M (TP port), 100M (fiber port), 1000M (Gigabit port), MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |  |
|-----------------------------|--|
| Connection                  | 2 removable 6-contact terminal block(s)  |
| Input Current               | EDS-518A/518A-T: 0.44 A @ 24 VDC<br>EDS-518A-MM-SC/MM-ST/SS-SC Series: 0.52 A @ 24 VDC<br>EDS-518A-SS-SC-80: 0.52 A @ 24 VDC |
| Input Voltage               | 24 VDC, Redundant dual inputs  |
| Operating Voltage           | 12 to 45 VDC   |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 94 x 135 x 142.7 mm (3.7 x 5.31 x 5.62 in)           |
| Weight       | 1630 g (3.60 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: 0 to 60°C (32 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |


## Standards and Certifications

|                     |   |
|---------------------|---|
| Safety              | EN 60950-1, UL 60950-1, CSA C22.2 No. 60950-1, UL 508 |
| Hazardous Locations | ATEX, Class I Division 2                              |
| EMC                 | EN 55032/24   |

|                         |  |
|-------------------------|--|
| EMI                     | CISPR 32, FCC Part 15B Class A   |
| EMS                     | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                | DNV-GL, NK   |
| Shock                   | IEC 60068-2-27   |
| Vibration               | IEC 60068-2-6  |
| Freefall                | IEC 60068-2-31   |
| <b>MTBF</b>             |  |
| Time                    | 250,966 hrs  |
| Standards               | Telcordia (Bellcore), GB   |
| <b>Warranty</b>         |  |
| Warranty Period         | 5 years  |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |
| <b>Package Contents</b> |  |
| Device                  | 1 x EDS-518A Series switch   |
| Cable                   | 1 x DB9 female to RJ45 10-pin  |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SFP slot<br>2 x cap, plastic, for SC fiber port (-SC models)<br>2 x cap, plastic, for ST fiber port (-ST models)  |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese  |
| Note                    | SFP modules need to be purchased separately for use with this product.   |

## Dimensions

Unit: mm (inch)

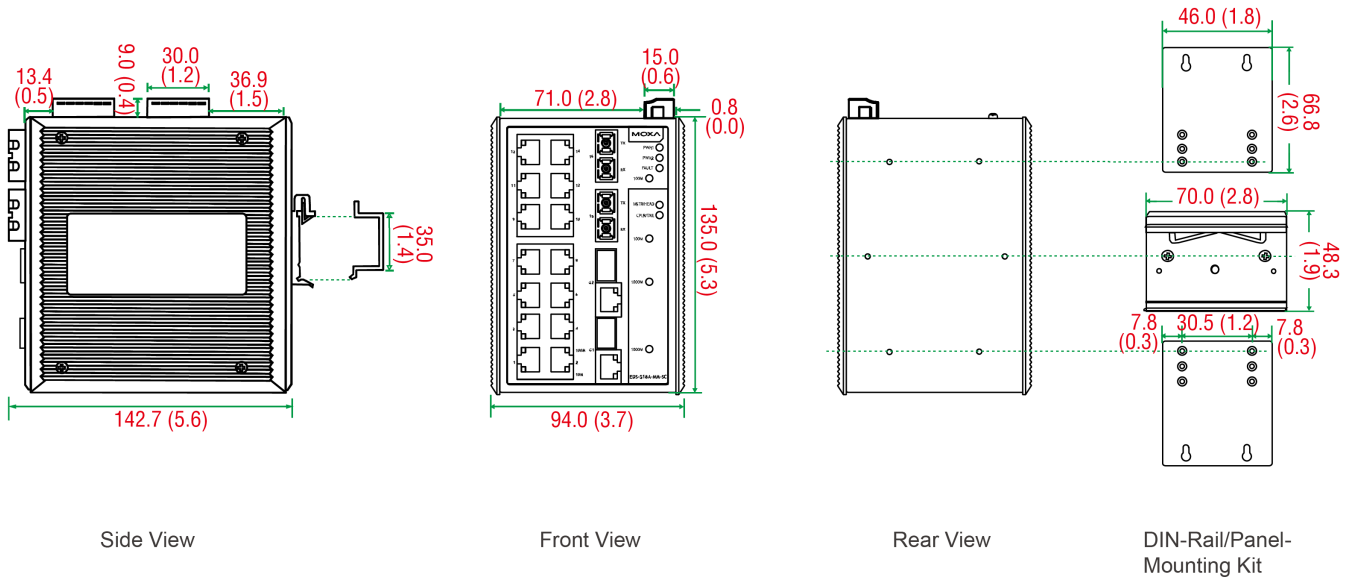

## Ordering Information

| Model Name        | 10/100BaseT(X) Ports RJ45 Connector | Combo Ports 10/100/1000BaseT(X) or 1000BaseSFP | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | 100BaseFX Ports Single-Mode, SC Connector, 80 km | Operating Temp. |
|-------------------|-------------------------------------|--|--|--|---|--|-----------------|
| EDS-518A          | 16                                  | 2  | -  | -  | -   | -  | 0 to 60°C       |
| EDS-518A-T        | 16                                  | 2  | -  | -  | -   | -  | -40 to 75°C     |
| EDS-518A-MM-SC    | 14                                  | 2  | 2  | -  | -   | -  | 0 to 60°C       |
| EDS-518A-MM-SC-T  | 14                                  | 2  | 2  | -  | -   | -  | -40 to 75°C     |
| EDS-518A-MM-ST    | 14                                  | 2  | -  | 2  | -   | -  | 0 to 60°C       |
| EDS-518A-MM-ST-T  | 14                                  | 2  | -  | 2  | -   | -  | -40 to 75°C     |
| EDS-518A-SS-SC    | 14                                  | 2  | -  | -  | 2   | -  | 0 to 60°C       |
| EDS-518A-SS-SC-T  | 14                                  | 2  | -  | -  | 2   | -  | -40 to 75°C     |
| EDS-518A-SS-SC-80 | 14                                  | 2  | -  | -  | -   | 2  | 0 to 60°C       |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### SFP Modules

|               |  |
|---------------|--|
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |

|                |  |
|----------------|--|
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

## Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

## Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

## Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

## Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-518E Series

## 14+4G-port Gigabit managed Ethernet switches



### Features and Benefits

- 4 Gigabit plus 14 fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Fiber Check™—comprehensive fiber status monitoring and warning on MST/ MSC/SSC/SFP fiber ports
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The EDS-518E standalone, compact 18-port managed Ethernet switches have 4 combo Gigabit ports with built-in RJ45 or SFP slots for Gigabit fiber-optic communication. The 14 fast Ethernet ports have a variety of copper and fiber port combinations that give the EDS-518E Series greater flexibility for designing your network and application. The Ethernet redundancy technologies Turbo Ring, Turbo Chain, RSTP/STP, and MSTP increase the system reliability and availability of your network backbone. The EDS-518E also supports advanced management and security features.

In addition, the EDS-518E Series is designed specifically for harsh industrial environments with limited installation space and high protection level requirements, such as maritime, rail wayside, oil and gas, factory automation, and process automation.

### Additional Features and Benefits

- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Fiber Check™ provides a comprehensive fiber Digital Diagnostic Monitoring (DDM) function and event warning on MST/MSC/SSC/SFP fiber ports
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

| 10/100BaseT(X) Ports (RJ45 connector)                 | EDS-518E-4GTXSFP: 14<br>EDS-518E-MM-SC-4GTXSFP/MM-ST-4GTXSFP/SS-SC-4GTXSFP: 12  |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|---|---|----------------|--------------|--|--|-----------|--|------------|-------------|------------------|-----|----------------|-------|--------------|------------------|--|------|------|------------|--------------|------|--|---------------|--------------|--------------|---------------|--------------|--------------|---------------|----------------|------------|---------|----------------|-----------|-----------|------------------|----|----|-------------------------|---|---|
|   | All models support:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection   |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4   |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| 100BaseFX Ports (multi-mode SC connector)             | EDS-518E-MM-SC-4GTXSFP Series: 2  |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| 100BaseFX Ports (multi-mode ST connector)             | EDS-518E-MM-ST-4GTXSFP Series: 2  |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| 100BaseFX Ports (single-mode SC connector)            | EDS-518E-SS-SC-4GTXSFP Series: 2  |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Optical Fiber   | <table border="1"> <thead> <tr> <th colspan="2" rowspan="2"></th> <th colspan="2">100BaseFX</th> </tr> <tr> <th>Multi-Mode</th> <th>Single-Mode</th> </tr> </thead> <tbody> <tr> <th rowspan="2">Fiber Cable Type</th> <th rowspan="2">OM1</th> <td>50/125 <math>\mu</math>m</td> <td rowspan="2">G.652</td> </tr> <tr> <td>800 MHz x km</td> </tr> <tr> <th colspan="2">Typical Distance</th> <td>4 km</td> <td>5 km</td> </tr> <tr> <th rowspan="3">Wavelength</th> <th>Typical (nm)</th> <td colspan="2">1300</td> </tr> <tr> <th>TX Range (nm)</th> <td>1260 to 1360</td> <td>1280 to 1340</td> </tr> <tr> <th>RX Range (nm)</th> <td>1100 to 1600</td> <td>1100 to 1600</td> </tr> <tr> <th rowspan="4">Optical Power</th> <th>TX Range (dBm)</th> <td>-10 to -20</td> <td>0 to -5</td> </tr> <tr> <th>RX Range (dBm)</th> <td>-3 to -32</td> <td>-3 to -34</td> </tr> <tr> <th>Link Budget (dB)</th> <td>12</td> <td>29</td> </tr> <tr> <th>Dispersion Penalty (dB)</th> <td>3</td> <td>1</td> </tr> </tbody> </table> <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.<br/>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                |              |  |  | 100BaseFX |  | Multi-Mode | Single-Mode | Fiber Cable Type | OM1 | 50/125 $\mu$ m | G.652 | 800 MHz x km | Typical Distance |  | 4 km | 5 km | Wavelength | Typical (nm) | 1300 |  | TX Range (nm) | 1260 to 1360 | 1280 to 1340 | RX Range (nm) | 1100 to 1600 | 1100 to 1600 | Optical Power | TX Range (dBm) | -10 to -20 | 0 to -5 | RX Range (dBm) | -3 to -32 | -3 to -34 | Link Budget (dB) | 12 | 29 | Dispersion Penalty (dB) | 3 | 1 |
|   |   | 100BaseFX      |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   |   | Multi-Mode     | Single-Mode  |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Fiber Cable Type                                      | OM1   | 50/125 $\mu$ m | G.652        |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   |   | 800 MHz x km   |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Typical Distance                                      |   | 4 km           | 5 km         |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Wavelength  | Typical (nm)  | 1300           |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   | TX Range (nm)   | 1260 to 1360   | 1280 to 1340 |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   | RX Range (nm)   | 1100 to 1600   | 1100 to 1600 |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Optical Power   | TX Range (dBm)  | -10 to -20     | 0 to -5      |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   | RX Range (dBm)  | -3 to -32      | -3 to -34    |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   | Link Budget (dB)  | 12             | 29           |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
|   | Dispersion Penalty (dB)   | 3              | 1            |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP   |                |              |  |  |           |  |            |             |                  |     |                |       |              |                  |  |      |      |            |              |      |  |               |              |              |               |              |              |               |                |            |         |                |           |           |                  |    |    |                         |   |   |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | 802.1Q VLAN, Port-based VLAN, GVRP, IGMP v1/v2/v3, GMRP |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)     |




|                                 |  |
|---------------------------------|--|
| Management                      | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                             | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols            | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security                        | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, MAB authentication, Sticky MAC, NTP authentication, MAC ACL, Port Lock, RADIUS, SSH, SMTP with TLS   |
| Time Management                 | NTP Server/Client, SNTP  |
| <b>Switch Properties</b>        |  |
| IGMP Groups                     | 2048   |
| MAC Table Size                  | 16 K   |
| Max. No. of VLANs               | 64   |
| Packet Buffer Size              | 1 Mbits  |
| Priority Queues                 | 4  |
| VLAN ID Range                   | VID 1 to 4094  |
| <b>USB Interface</b>            |  |
| Storage Port                    | USB Type A   |
| <b>LED Interface</b>            |  |
| LED Indicators                  | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), 100M (fiber port), Gigabit combo port, MSTR/HEAD, CPLR/TAIL   |
| <b>Serial Interface</b>         |  |
| Console Port                    | USB-serial console (Type B connector)  |
| <b>DIP Switch Configuration</b> |  |
| DIP Switches                    | Turbo Ring, Master, Coupler, Reserve   |
| <b>Power Parameters</b>         |  |
| Connection                      | 2 removable 4-contact terminal block(s)  |
| Input Current                   | EDS-518E-4GTXSFP Series: 0.37 A @ 24 VDC<br>EDS-518E-MM-SC-4GTXSFP/MM-ST-4GTXSFP/SS-SC-4GTXSFP: 0.41 A @ 24 VDC  |
| Input Voltage                   | 12/24/48/-48 VDC, Redundant dual inputs  |
| Operating Voltage               | 9.6 to 60 VDC  |
| Overload Current Protection     | Supported  |
| Reverse Polarity Protection     | Supported  |
| <b>Physical Characteristics</b> |  |
| Housing                         | Metal  |
| IP Rating                       | IP30   |
| Dimensions                      | 94 x 135 x 137 mm (3.7 x 5.31 x 5.39 in)   |

|  |   |
|--|---|
| Weight                                 | 1518 g (3.35 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | UL 508, EN 60950-1 (LVD)  |
| EMC                                    | EN 61000-6-2/-6-4   |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations                    | ATEX, Class I Division 2  |
| Maritime                               | DNV-GL, LR, ABS, NK   |
| Power Substation                       | IEC 61850-3, IEEE 1613  |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-32  |
| Vibration                              | IEC 60068-2-6   |
| <b>MTBF</b>                            |   |
| Time                                   | 723,953 hrs   |
| Standards                              | Telcordia (Bellcore), GB  |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b>                |   |
| Device                                 | 1 x EDS-518E Series switch  |
| Cable                                  | 1 x USB type A male to USB type B male  |
| Installation Kit                       | 4 x cap, plastic, for RJ45 port<br>4 x cap, plastic, for SFP slot   |

|               |   |
|---------------|---|
| Documentation | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note          | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

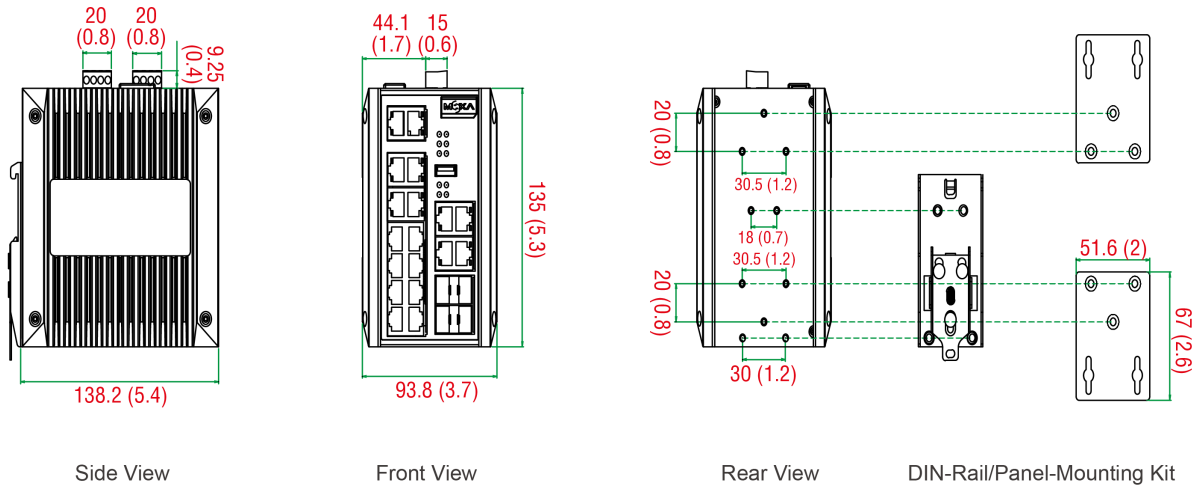

## Ordering Information

| Model Name               | 10/100BaseT(X) Ports<br>RJ45 Connector | Combo Ports<br>10/100/<br>1000BaseT(X) or<br>100/1000BaseSFP+ | 100BaseFX Ports<br>Multi-Mode, SC<br>Connector | 100BaseFX Ports<br>Multi-Mode, ST<br>Connector | 100BaseFX Ports<br>Single-Mode, SC<br>Connector | Operating Temp. |
|--------------------------|--|---|--|--|---|-----------------|
| EDS-518E-4GTXSFP         | 14                                     | 4   | –  | –  | –   | -10 to 60°C     |
| EDS-518E-4GTXSFP-T       | 14                                     | 4   | –  | –  | –   | -40 to 75°C     |
| EDS-518E-MM-SC-4GTXSFP   | 12                                     | 4   | 2  | –  | –   | -10 to 60°C     |
| EDS-518E-MM-SC-4GTXSFP-T | 12                                     | 4   | 2  | –  | –   | -40 to 75°C     |
| EDS-518E-MM-ST-4GTXSFP   | 12                                     | 4   | –  | 2  | –   | -10 to 60°C     |
| EDS-518E-MM-ST-4GTXSFP-T | 12                                     | 4   | –  | 2  | –   | -40 to 75°C     |
| EDS-518E-SS-SC-4GTXSFP   | 12                                     | 4   | –  | –  | 2   | -10 to 60°C     |
| EDS-518E-SS-SC-4GTXSFP-T | 12                                     | 4   | –  | –  | 2   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |

|              |   |
|--------------|---|
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
|--------------|---|

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-51-01 | Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm |
|----------|---|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-528E Series

## 24+4G-port Gigabit managed Ethernet switches



### Features and Benefits

- 4 Gigabit plus 24 fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The EDS-528E standalone, compact 28-port managed Ethernet switches have 4 combo Gigabit ports with built-in RJ45 or SFP slots for Gigabit fiber-optic communication. The 24 fast Ethernet ports have a variety of copper and fiber port combinations that give the EDS-528E Series greater flexibility for designing your network and application. The Ethernet redundancy technologies, Turbo Ring, Turbo Chain, RSTP/STP, and MSTP, increase the system reliability and availability of your network backbone. The EDS-528E also supports advanced management and security features.

In addition, the EDS-528E Series is designed specifically for harsh industrial environments with limited installation space and high protection level requirements, such as maritime, rail wayside, oil and gas, factory automation, and process automation.

### Additional Features and Benefits

- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

|   |   |
|---|---|
| 10/100BaseT(X) Ports (RJ45 connector)                 | 24<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4   |
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, GVRP, IGMP v1/v2/v3, GMRP, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, MAB authentication, Sticky MAC, NTP authentication, MAC ACL, Port Lock, RADIUS, SSH, SMTP with TLS   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2 (LV model), STATE, FAULT, 10/100M (TP port), Gigabit combo port, MSTR/HEAD, CPLR/TAIL |
|----------------|--|


|  |   |
|--|---|
| <b>Serial Interface</b>                |   |
| Console Port                           | USB-serial console (Type B connector)   |
| <b>DIP Switch Configuration</b>        |   |
| DIP Switches                           | Turbo Ring, Master, Coupler, Reserve  |
| <b>Power Parameters</b>                |   |
| Connection                             | EDS-528E-4GTXSFP-HV Series: 1 removable 4-contact and 1 removable 5-contact terminal block<br>EDS-528E-4GTXSFP-LV Series: 2 removable 4-contact terminal block(s)   |
| Input Current                          | EDS-528E-4GTXSFP-LV Series: 0.47 A @ 24 VDC<br>EDS-528E-4GTXSFP-HV Series: 0.11/0.055 A @ 110/220 VDC, 0.21/0.13 A @ 110/220 VAC  |
| Input Voltage                          | EDS-528E-4GTXSFP-LV Series: 12/24/48/-48 VDC, Redundant dual inputs<br>EDS-528E-4GTXSFP-HV Series: 110/220 VDC/VAC, Single input  |
| Operating Voltage                      | EDS-528E-4GTXSFP-LV Series: 9.6 to 60 VDC<br>EDS-528E-4GTXSFP-HV Series: 88 to 300 VDC, 85 to 264 VAC   |
| Overload Current Protection            | Supported   |
| Reverse Polarity Protection            | Supported   |
| <b>Physical Characteristics</b>        |   |
| Housing                                | Metal   |
| IP Rating                              | IP30  |
| Dimensions                             | 115.4 x 135 x 137 mm (4.54 x 5.31 x 5.39 in)  |
| Weight                                 | 1850 g (4.08 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | UL 61010-2-201, EN 60950-1 (LVD)  |
| EMC                                    | EN 61000-6-2/-6-4   |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Power Substation                       | IEC 61850-3, IEEE 1613  |
| Railway                                | EN 50121-4  |
| Shock                                  | IEC 60068-2-27  |



|                         |   |
|-------------------------|---|
| Freefall                | IEC 60068-2-32  |
| Vibration               | IEC 60068-2-6   |
| <b>MTBF</b>             |   |
| Time                    | 774,634 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-528E Series switch  |
| Cable                   | 1 x USB type A male to USB type B male  |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>4 x cap, plastic, for SFP slot   |
| Documentation           | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note                    | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

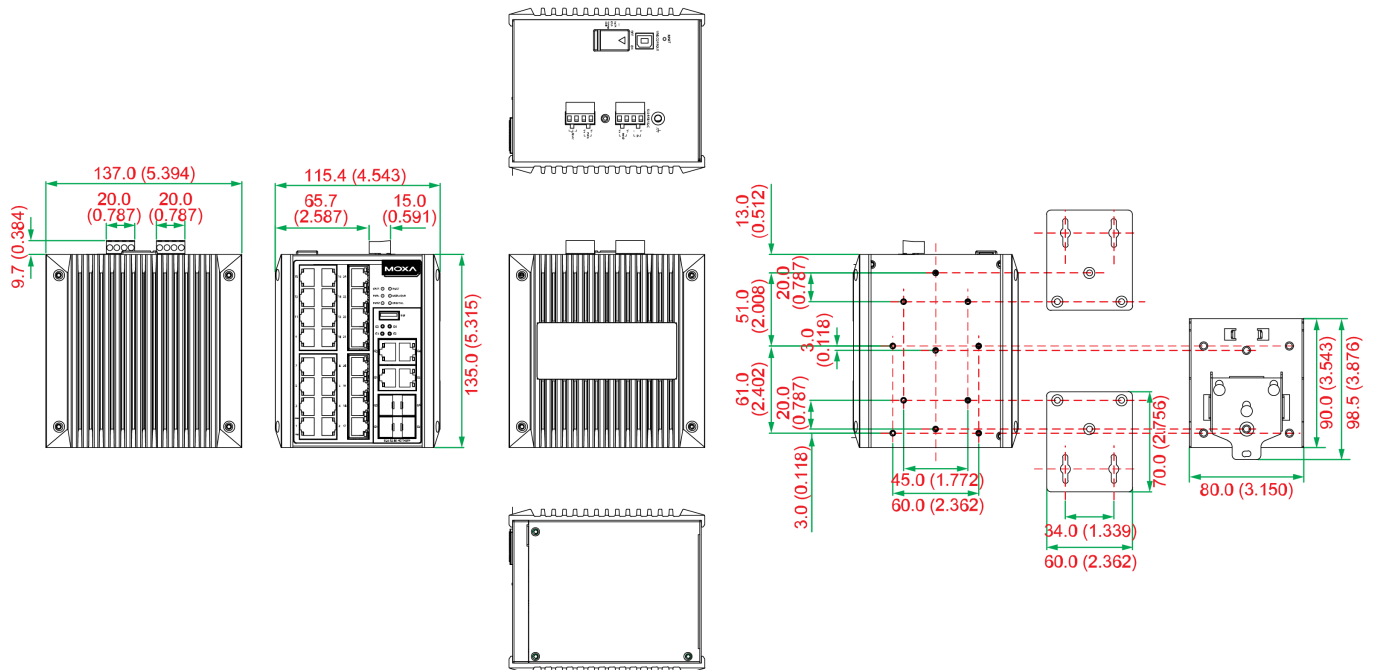

## Ordering Information

| Model Name            | 10/100BaseT(X) Ports RJ45 Connector | Combo Ports 10/100/1000BaseT(X) or 100/1000BaseSFP+ | 12/24/48/-48 VDC | 110/220 VDC/VAC | Operating Temp. |
|-----------------------|-------------------------------------|---|------------------|-----------------|-----------------|
| EDS-528E-4GTXSFP-LV   | 24                                  | 4   | 2                | –               | -10 to 60°C     |
| EDS-528E-4GTXSFP-LV-T | 24                                  | 4   | 2                | –               | -40 to 75°C     |
| EDS-528E-4GTXSFP-HV   | 24                                  | 4   | –                | 1               | -10 to 60°C     |
| EDS-528E-4GTXSFP-HV-T | 24                                  | 4   | –                | 1               | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |

|               |   |
|---------------|---|
| SFP-1GLHLC-T  | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature      |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T  | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T  | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T  | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-60-01 | Wall-mounting kit, 2 plates, 6 screws, 60 x 70 x 2 mm |
|----------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-528E Series

## 24+4G-port Gigabit managed Ethernet switches



### Features and Benefits

- 4 Gigabit plus 24 fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The EDS-528E standalone, compact 28-port managed Ethernet switches have 4 combo Gigabit ports with built-in RJ45 or SFP slots for Gigabit fiber-optic communication. The 24 fast Ethernet ports have a variety of copper and fiber port combinations that give the EDS-528E Series greater flexibility for designing your network and application. The Ethernet redundancy technologies, Turbo Ring, Turbo Chain, RSTP/STP, and MSTP, increase the system reliability and availability of your network backbone. The EDS-528E also supports advanced management and security features.

In addition, the EDS-528E Series is designed specifically for harsh industrial environments with limited installation space and high protection level requirements, such as maritime, rail wayside, oil and gas, factory automation, and process automation.

### Additional Features and Benefits

- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

|   |   |
|---|---|
| 10/100BaseT(X) Ports (RJ45 connector)                 | 24<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4   |
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, GVRP, IGMP v1/v2/v3, GMRP, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, MAB authentication, Sticky MAC, NTP authentication, MAC ACL, Port Lock, RADIUS, SSH, SMTP with TLS   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface


|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2 (LV model), STATE, FAULT, 10/100M (TP port), Gigabit combo port, MSTR/HEAD, CPLR/TAIL |
|----------------|--|

|  |   |
|--|---|
| <b>Serial Interface</b>                |   |
| Console Port                           | USB-serial console (Type B connector)   |
| <b>DIP Switch Configuration</b>        |   |
| DIP Switches                           | Turbo Ring, Master, Coupler, Reserve  |
| <b>Power Parameters</b>                |   |
| Connection                             | EDS-528E-4GTXSFP-HV Series: 1 removable 4-contact and 1 removable 5-contact terminal block<br>EDS-528E-4GTXSFP-LV Series: 2 removable 4-contact terminal block(s)   |
| Input Current                          | EDS-528E-4GTXSFP-LV Series: 0.47 A @ 24 VDC<br>EDS-528E-4GTXSFP-HV Series: 0.11/0.055 A @ 110/220 VDC, 0.21/0.13 A @ 110/220 VAC  |
| Input Voltage                          | EDS-528E-4GTXSFP-LV Series: 12/24/48/-48 VDC, Redundant dual inputs<br>EDS-528E-4GTXSFP-HV Series: 110/220 VDC/VAC, Single input  |
| Operating Voltage                      | EDS-528E-4GTXSFP-LV Series: 9.6 to 60 VDC<br>EDS-528E-4GTXSFP-HV Series: 88 to 300 VDC, 85 to 264 VAC   |
| Overload Current Protection            | Supported   |
| Reverse Polarity Protection            | Supported   |
| <b>Physical Characteristics</b>        |   |
| Housing                                | Metal   |
| IP Rating                              | IP30  |
| Dimensions                             | 115.4 x 135 x 137 mm (4.54 x 5.31 x 5.39 in)  |
| Weight                                 | 1850 g (4.08 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | UL 61010-2-201, EN 60950-1 (LVD)  |
| EMC                                    | EN 61000-6-2/-6-4   |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Power Substation                       | IEC 61850-3, IEEE 1613  |
| Railway                                | EN 50121-4  |
| Shock                                  | IEC 60068-2-27  |

|                         |   |
|-------------------------|---|
| Freefall                | IEC 60068-2-32  |
| Vibration               | IEC 60068-2-6   |
| <b>MTBF</b>             |   |
| Time                    | 774,634 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-528E Series switch  |
| Cable                   | 1 x USB type A male to USB type B male  |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>4 x cap, plastic, for SFP slot   |
| Documentation           | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note                    | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

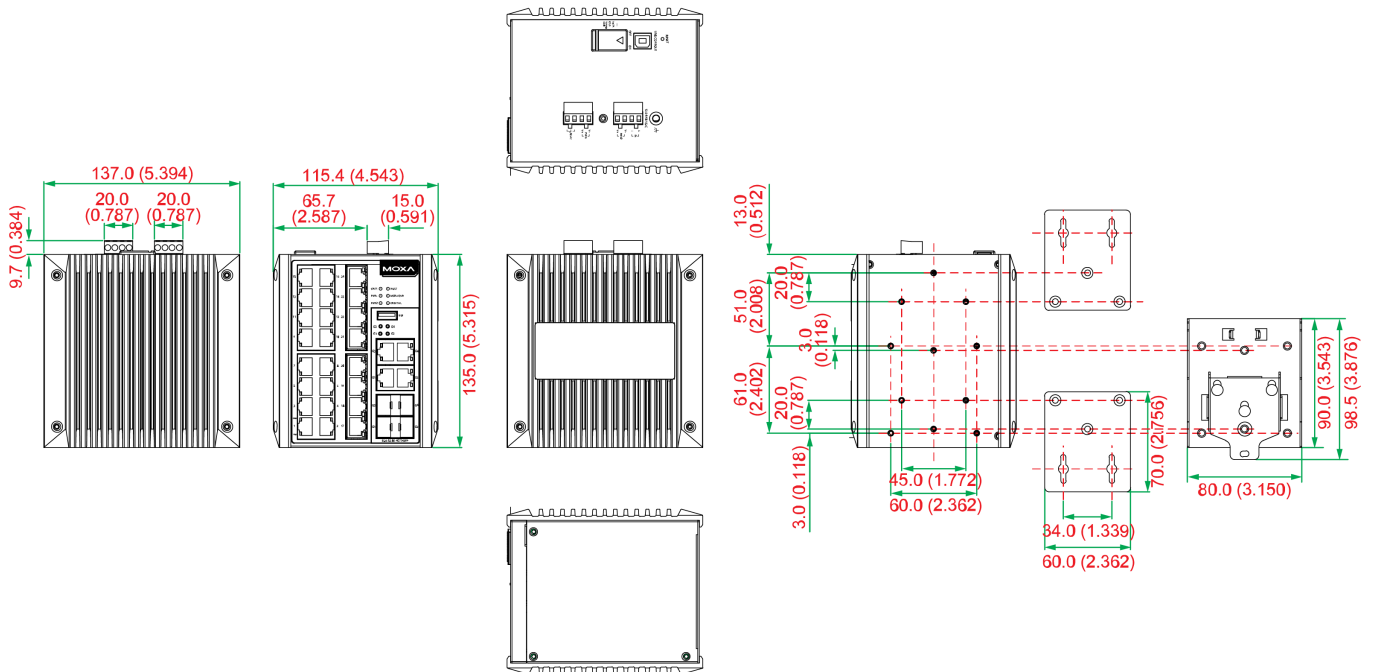

## Ordering Information

| Model Name            | 10/100BaseT(X) Ports<br>RJ45 Connector | Combo Ports<br>10/100/1000BaseT(X)<br>or 100/1000BaseSFP+ | 12/24/48/-48 VDC | 110/220 VDC/VAC | Operating Temp. |
|-----------------------|--|---|------------------|-----------------|-----------------|
| EDS-528E-4GTXSFP-LV   | 24                                     | 4   | 2                | –               | -10 to 60°C     |
| EDS-528E-4GTXSFP-LV-T | 24                                     | 4   | 2                | –               | -40 to 75°C     |
| EDS-528E-4GTXSFP-HV   | 24                                     | 4   | –                | 1               | -10 to 60°C     |
| EDS-528E-4GTXSFP-HV-T | 24                                     | 4   | –                | 1               | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |



|               |   |
|---------------|---|
| SFP-1GLHLC-T  | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature      |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T  | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T  | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T  | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-60-01 | Wall-mounting kit, 2 plates, 6 screws, 60 x 70 x 2 mm |
|----------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-608 Series


## 8-port compact modular managed Ethernet switches



### Features and Benefits

- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The versatile modular design of the compact EDS-608 Series allows users to combine fiber and copper modules to create switch solutions suitable for any automation network. The EDS-608's modular design lets you install 8 Fast Ethernet ports, and the advanced Turbo Ring and Turbo Chain (recovery time < 20 ms) technology, RSTP/STP, and MSTP help increase the reliability and availability of your industrial Ethernet network.

Models with an extended operating temperature range of -40 to 75°C are also available. The EDS-608 Series supports several reliable and intelligent functions, including IEEE 1588 PTPv2, EtherNet/IP, Modbus TCP, LLDP, DHCP Option 82, SNMP Inform, QoS, IGMP snooping, VLAN, TACACS+, IEEE 802.1X, HTTPS, SSH, SNMPv3, and more, making the Ethernet switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- SNMP Inform for ensuring reliable event management
- LLDP for automated topology discovery
- DHCP Option 82 for IP address assignment with different policies
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for time synchronization of networks
- EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Automatic warning by exception through email and relay output
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC                     |

## Ethernet Interface

|           |  |
|-----------|--|
| Module    | 2 slots for any combination of 4-port interface modules, 10/100BaseT(X) or 100BaseFX   |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+  |
| Time Management      | NTP Server/Client, SNTP   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 1 removable 6-contact terminal block(s) |
| Input Voltage               | 12/24/48 VDC, Redundant dual inputs     |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 124.9 x 151 x 157.2 mm (4.92 x 5.95 x 6.19 in)       |
| Weight       | 2080 g (4.59 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-608: 0 to 60°C (32 to 140°F)<br>EDS-608-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |  |
|---------------------|--|
| Freefall            | IEC 60068-2-32   |
| EMC                 | EN 55032/24, EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2   |
| Maritime            | ABS, DNV-GL, LR, NK  |
| Railway             | EN 50121-4   |
| Safety              | EN 60950-1, UL 508, UL 60950-1   |
| Shock               | IEC 60068-2-27   |
| Traffic Control     | NEMA TS2   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 596,219 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|        |                               |
|--------|-------------------------------|
| Device | 1 x EDS-608 Series switch     |
| Cable  | 1 x RJ45-to-DB9 console cable |


|               |   |
|---------------|---|
| Documentation | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note          | Modules from the CM-600 Module Series need to be purchased separately for use with this product.  |

## Dimensions


Unit: mm (inch)

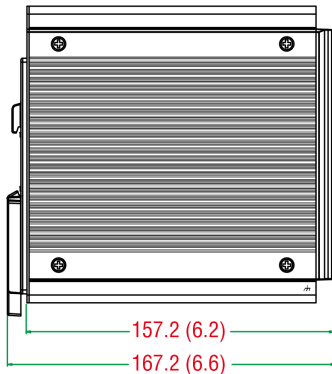


Side View

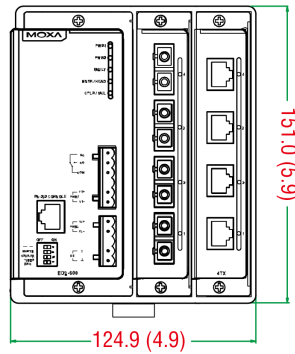


Front View




Side View



Top View



Rear View



DIN-Rail Mounting Kit

## Ordering Information

| Model Name | Layer | Total No. of Ports | Module<br>10/100BaseT(X) and/or<br>100BaseFX               | Operating Temp. |
|------------|-------|--------------------|--|-----------------|
| EDS-608    | 2     | 8                  | 2 slots for up to 8 10/100BaseT(X) and/or 100-BaseFX ports | 0 to 60°C       |
| EDS-608-T  | 2     | 8                  | 2 slots for up to 8 10/100BaseT(X) and/or 100-BaseFX ports | -40 to 75°C     |

## Accessories (sold separately)

### CM-600 Module Series

|                |   |
|----------------|---|
| CM-600-4TX     | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, -40 to 75°C operating temperature                                    |
| CM-600-4TX-BP  | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, bypass support, -40 to 75°C operating temperature                    |
| CM-600-4TX-PTP | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, IEEE 1588 PTP V2 protocol support, -40 to 75°C operating temperature |

|                 |  |
|-----------------|--|
| CM-600-4MSC     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-4MST     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature   |
| CM-600-4SSC     | Fast Ethernet interface module with 4 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-3MSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature    |
| CM-600-3MST/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature    |
| CM-600-3SSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-2MSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-2MST/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature  |
| CM-600-2SSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature |

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-75 | Wall-mounting kit, 2 plates, 8 screws, 75 x 90 x 2.5 mm |
|-------|---|

### Anti-Vibration Wiring Kits

|        |                           |
|--------|---------------------------|
| AVK-17 | Anti-vibration wiring kit |
|--------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-611 Series


## 8+3G-port compact modular managed Ethernet switches



### Features and Benefits

- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The versatile modular design of the compact EDS-611 Series allows users to combine fiber and copper modules to create switch solutions suitable for any automation network. The EDS-611's modular design lets you install up to 3 Gigabit Ethernet ports and 8 Fast Ethernet ports, and the advanced Turbo Ring and Turbo Chain (recovery time < 20 ms) technology, RSTP/STP, and MSTP help increase the reliability and availability of your industrial Ethernet network.

Models with an extended operating temperature range of -40 to 75°C are also available. The EDS-611 Series supports several reliable and intelligent functions, including IEEE 1588 PTPv2, EtherNet/IP, Modbus TCP, LLDP, DHCP Option 82, SNMP Inform, QoS, IGMP snooping, VLAN, TACACS+, IEEE 802.1X, HTTPS, SSH, SNMPv3, and more, making the Ethernet switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- SNMP Inform for ensuring reliable event management
- LLDP for automated topology discovery
- DHCP Option 82 for IP address assignment with different policies
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for time synchronization of networks
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Lock port function for blocking unauthorized access based on MAC address
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Automatic warning by exception through email and relay output
- Port mirroring for online debugging

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC                     |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

|           |   |
|-----------|---|
| Module    | 2 slots for any combination of 4-port interface modules, 10/100BaseT(X) or 100BaseFX  |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP  |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL, G1/G2/G3 |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 1 removable 6-contact terminal block(s) |
| Input Voltage               | 12/24/48 VDC, Redundant dual inputs     |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |



## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 124.9 x 151 x 157.2 mm (4.92 x 5.95 x 6.19 in)       |
| Weight       | 2260 g (4.99 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-611: 0 to 60°C (32 to 140°F)<br>EDS-611-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |  |
|---------------------|--|
| Freefall            | IEC 60068-2-32   |
| EMC                 | EN 55032/24, EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2   |
| Maritime            | ABS, DNV-GL, LR, NK  |
| Railway             | EN 50121-4   |
| Safety              | EN 60950-1, UL 508, UL 60950-1   |
| Shock               | IEC 60068-2-27   |
| Traffic Control     | NEMA TS2   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 483,344 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|        |                               |
|--------|-------------------------------|
| Device | 1 x EDS-611 Series switch     |
| Cable  | 1 x RJ45-to-DB9 console cable |


|               |  |
|---------------|--|
| Documentation | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide |
| Note          | SFP modules and/or modules from the CM-600 Module Series need to be purchased separately for use with this product.  |

## Dimensions


Unit: mm (inch)

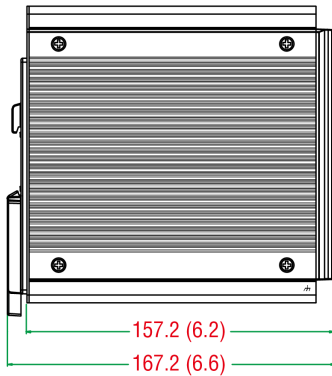


Side View

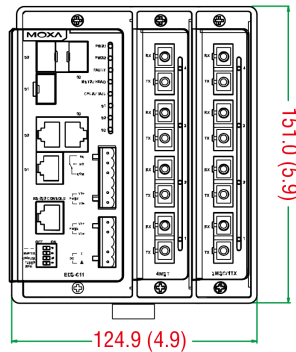


Front View




Side View



Top View



Rear View



DIN-Rail Mounting Kit

## Ordering Information

| Model Name | Layer | Total No. of Ports | Module 10/100BaseT(X) and/or 100BaseFX                    | Combo Ports 10/100/1000BaseT(X) or 100/1000BaseSFP | Operating Temp. |
|------------|-------|--------------------|---|--|-----------------|
| EDS-611    | 2     | 11                 | 2 slots for up to 8 10/100BaseT(X) and/or 100BaseFX ports | 3  | 0 to 60°C       |
| EDS-611-T  | 2     | 11                 | 2 slots for up to 8 10/100BaseT(X) and/or 100BaseFX ports | 3  | -40 to 75°C     |

## Accessories (sold separately)

### CM-600 Module Series

|                |   |
|----------------|---|
| CM-600-4TX     | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, -40 to 75°C operating temperature                                    |
| CM-600-4TX-BP  | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, bypass support, -40 to 75°C operating temperature                    |
| CM-600-4TX-PTP | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, IEEE 1588 PTP V2 protocol support, -40 to 75°C operating temperature |

|                 |  |
|-----------------|--|
| CM-600-4MSC     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-4MST     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature   |
| CM-600-4SSC     | Fast Ethernet interface module with 4 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-3MSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature    |
| CM-600-3MST/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature    |
| CM-600-3SSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-2MSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-2MST/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature  |
| CM-600-2SSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature |

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### SFP Modules

|               |  |
|---------------|--|
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXL    | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |

|                |   |
|----------------|---|
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature    |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXLC-T  | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC    | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature      |
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

#### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

#### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-75 | Wall-mounting kit, 2 plates, 8 screws, 75 x 90 x 2.5 mm |
|-------|---|

#### Anti-Vibration Wiring Kits

|        |                           |
|--------|---------------------------|
| AVK-17 | Anti-vibration wiring kit |
|--------|---------------------------|

#### Software

|             |  |
|-------------|--|
| MXview-50   | Industrial network management software with a license for 50 nodes (by IP address)   |
| MXview-100  | Industrial network management software with a license for 100 nodes (by IP address)  |
| MXview-250  | Industrial network management software with a license for 250 nodes (by IP address)  |
| MXview-500  | Industrial network management software with a license for 500 nodes (by IP address)  |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |

|                   |  |
|-------------------|--|
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-616 Series


## 16-port compact modular managed Ethernet switches



### Features and Benefits

- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The versatile modular design of the compact EDS-616 Series allows users to combine fiber and copper modules to create switch solutions suitable for any automation network. The EDS-616's modular design lets you install up to 16 Fast Ethernet ports, and the advanced Turbo Ring and Turbo Chain (recovery time < 20 ms) technology, RSTP/STP, and MSTP help increase the reliability and availability of your industrial Ethernet network.

Models with an extended operating temperature range of -40 to 75°C are also available. The EDS-616 Series supports several reliable and intelligent functions, including IEEE 1588 PTPv2, EtherNet/IP, Modbus TCP, LLDP, DHCP Option 82, SNMP Inform, QoS, IGMP snooping, VLAN, TACACS+, IEEE 802.1X, HTTPS, SSH, SNMPv3, and more, making the Ethernet switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- SNMP Inform for ensuring reliable event management
- LLDP for automated topology discovery
- DHCP Option 82 for IP address assignment with different policies
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for time synchronization of networks
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Port mirroring for online debugging
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC                     |

## Ethernet Interface

|           |  |
|-----------|--|
| Module    | 4 slots for any combination of 4-port interface modules, 10/100BaseT(X) or 100BaseFX   |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+  |
| Time Management      | NTP Server/Client, SNTP   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 1 removable 6-contact terminal block(s) |
| Input Voltage               | 12/24/48 VDC, Redundant dual inputs     |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 185 x 151 x 157.2 mm (7.28 x 5.95 x 6.19 in)         |
| Weight       | 2780 g (6.13 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-616: 0 to 60°C (32 to 140°F)<br>EDS-616-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |  |
|---------------------|--|
| Freefall            | IEC 60068-2-32   |
| EMC                 | EN 55032/24, EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2   |
| Maritime            | ABS, DNV-GL, LR, NK  |
| Railway             | EN 50121-4   |
| Safety              | EN 60950-1, UL 508, UL 60950-1   |
| Shock               | IEC 60068-2-27   |
| Traffic Control     | NEMA TS2   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 546,937 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents


|        |                               |
|--------|-------------------------------|
| Device | 1 x EDS-616 Series switch     |
| Cable  | 1 x RJ45-to-DB9 console cable |



|               |   |
|---------------|---|
| Documentation | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note          | Modules from the CM-600 Module Series need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

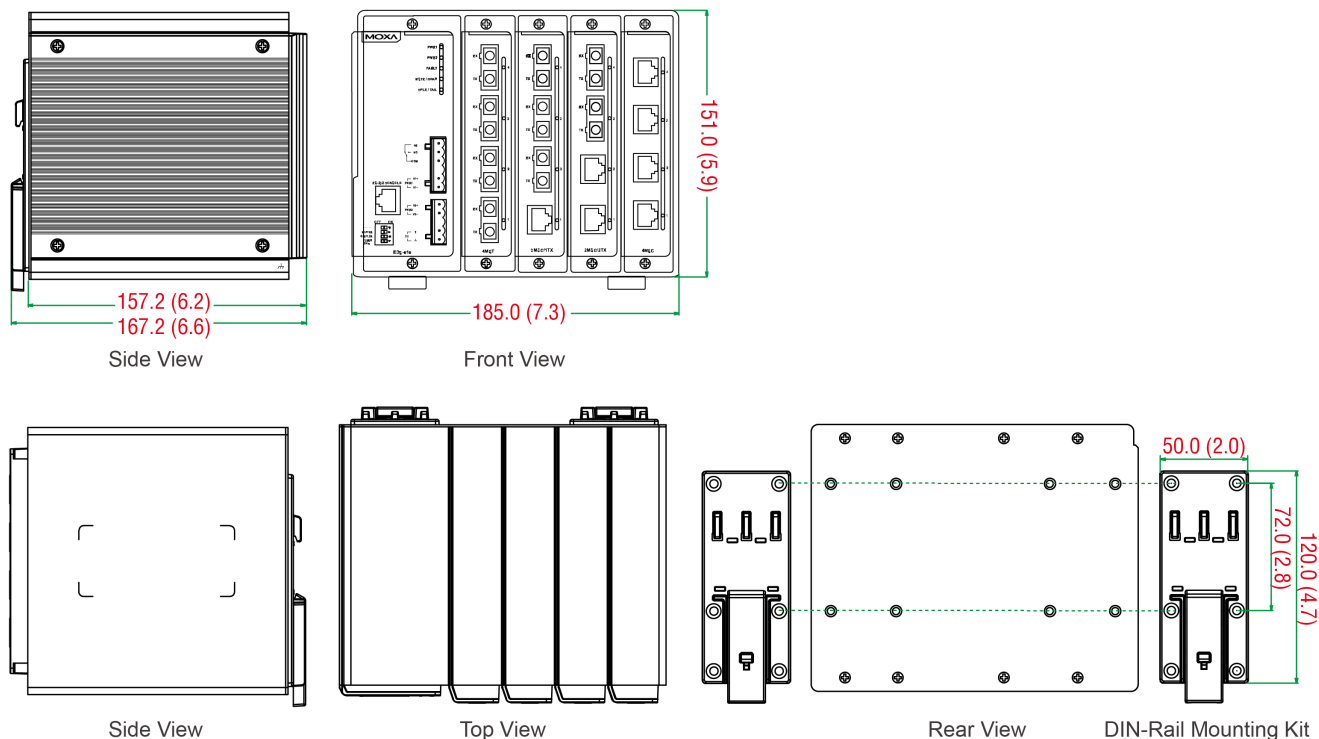

## Ordering Information

| Model Name | Layer | Total No. of Ports | Module 10/100BaseT(X) and/or 100BaseFX                      | Operating Temp. |
|------------|-------|--------------------|---|-----------------|
| EDS-616    | 2     | 16                 | 4 slots for up to 16 10/100BaseT(X) and/or 100-BaseFX ports | 0 to 60°C       |
| EDS-616-T  | 2     | 16                 | 4 slots for up to 16 10/100BaseT(X) and/or 100-BaseFX ports | -40 to 75°C     |

## Accessories (sold separately)

### CM-600 Module Series

|                |   |
|----------------|---|
| CM-600-4TX     | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, -40 to 75°C operating temperature                                    |
| CM-600-4TX-BP  | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, bypass support, -40 to 75°C operating temperature                    |
| CM-600-4TX-PTP | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, IEEE 1588 PTP V2 protocol support, -40 to 75°C operating temperature |
| CM-600-4MSC    | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature                                |

|                 |  |
|-----------------|--|
| CM-600-4MST     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature   |
| CM-600-4SSC     | Fast Ethernet interface module with 4 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-3MSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature    |
| CM-600-3MST/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature    |
| CM-600-3SSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-2MSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-2MST/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature  |
| CM-600-2SSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature |

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-75 | Wall-mounting kit, 2 plates, 8 screws, 75 x 90 x 2.5 mm |
|-------|---|

### Anti-Vibration Wiring Kits

|        |                           |
|--------|---------------------------|
| AVK-17 | Anti-vibration wiring kit |
|--------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-616 Series


## 16-port compact modular managed Ethernet switches



### Features and Benefits

- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The versatile modular design of the compact EDS-616 Series allows users to combine fiber and copper modules to create switch solutions suitable for any automation network. The EDS-616's modular design lets you install up to 16 Fast Ethernet ports, and the advanced Turbo Ring and Turbo Chain (recovery time < 20 ms) technology, RSTP/STP, and MSTP help increase the reliability and availability of your industrial Ethernet network.

Models with an extended operating temperature range of -40 to 75°C are also available. The EDS-616 Series supports several reliable and intelligent functions, including IEEE 1588 PTPv2, EtherNet/IP, Modbus TCP, LLDP, DHCP Option 82, SNMP Inform, QoS, IGMP snooping, VLAN, TACACS+, IEEE 802.1X, HTTPS, SSH, SNMPv3, and more, making the Ethernet switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- SNMP Inform for ensuring reliable event management
- LLDP for automated topology discovery
- DHCP Option 82 for IP address assignment with different policies
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for time synchronization of networks
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Port mirroring for online debugging
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC                     |

## Ethernet Interface

|           |  |
|-----------|--|
| Module    | 4 slots for any combination of 4-port interface modules, 10/100BaseT(X) or 100BaseFX   |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+  |
| Time Management      | NTP Server/Client, SNTP   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 1 removable 6-contact terminal block(s) |
| Input Voltage               | 12/24/48 VDC, Redundant dual inputs     |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 185 x 151 x 157.2 mm (7.28 x 5.95 x 6.19 in)         |
| Weight       | 2780 g (6.13 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-616: 0 to 60°C (32 to 140°F)<br>EDS-616-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |  |
|---------------------|--|
| Freefall            | IEC 60068-2-32   |
| EMC                 | EN 55032/24, EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2   |
| Maritime            | ABS, DNV-GL, LR, NK  |
| Railway             | EN 50121-4   |
| Safety              | EN 60950-1, UL 508, UL 60950-1   |
| Shock               | IEC 60068-2-27   |
| Traffic Control     | NEMA TS2   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 546,937 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|        |                               |
|--------|-------------------------------|
| Device | 1 x EDS-616 Series switch     |
| Cable  | 1 x RJ45-to-DB9 console cable |

|               |   |
|---------------|---|
| Documentation | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note          | Modules from the CM-600 Module Series need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

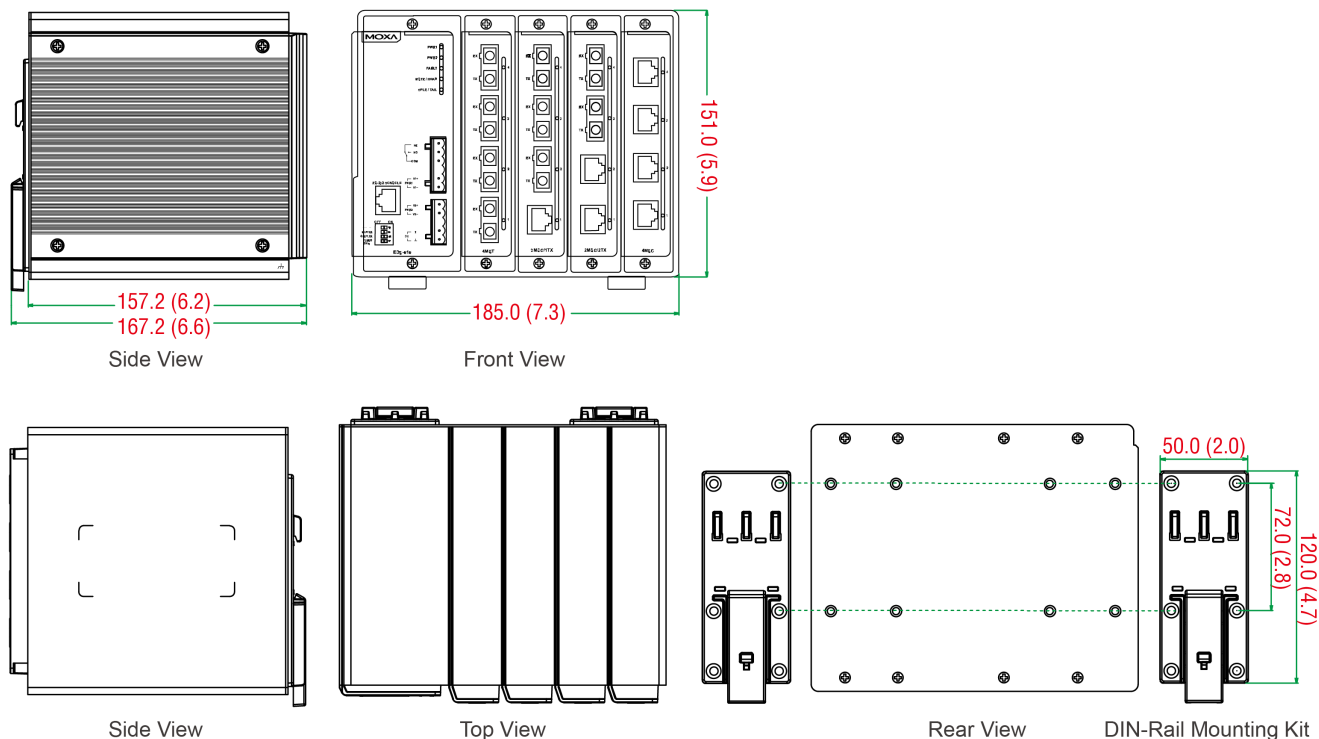

## Ordering Information

| Model Name | Layer | Total No. of Ports | Module 10/100BaseT(X) and/or 100BaseFX                      | Operating Temp. |
|------------|-------|--------------------|---|-----------------|
| EDS-616    | 2     | 16                 | 4 slots for up to 16 10/100BaseT(X) and/or 100-BaseFX ports | 0 to 60°C       |
| EDS-616-T  | 2     | 16                 | 4 slots for up to 16 10/100BaseT(X) and/or 100-BaseFX ports | -40 to 75°C     |

## Accessories (sold separately)

### CM-600 Module Series

|                |   |
|----------------|---|
| CM-600-4TX     | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, -40 to 75°C operating temperature                                    |
| CM-600-4TX-BP  | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, bypass support, -40 to 75°C operating temperature                    |
| CM-600-4TX-PTP | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, IEEE 1588 PTP V2 protocol support, -40 to 75°C operating temperature |
| CM-600-4MSC    | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature                                |

|                 |  |
|-----------------|--|
| CM-600-4MST     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature   |
| CM-600-4SSC     | Fast Ethernet interface module with 4 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-3MSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature    |
| CM-600-3MST/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature    |
| CM-600-3SSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-2MSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-2MST/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature  |
| CM-600-2SSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature |

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-75 | Wall-mounting kit, 2 plates, 8 screws, 75 x 90 x 2.5 mm |
|-------|---|

### Anti-Vibration Wiring Kits

|        |                           |
|--------|---------------------------|
| AVK-17 | Anti-vibration wiring kit |
|--------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-619 Series


## 16+3G-port compact modular managed Ethernet switches



### Features and Benefits

- Up to 19 optical fiber connections in a compact switch
- Modular design with 4-port copper/fiber combinations
- Hot-swappable media modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



### Introduction

The versatile modular design of the compact EDS-619 Series allows users to combine fiber and copper modules to create switch solutions suitable for any automation network. The EDS-619's modular design lets you install up to 3 Gigabit Ethernet ports and 16 Fast Ethernet ports, and the advanced Turbo Ring and Turbo Chain (recovery time < 20 ms) technology, RSTP/STP, and MSTP help increase the reliability and availability of your industrial Ethernet network.

Models with an extended operating temperature range of -40 to 75°C are also available. The EDS-619 Series supports several reliable and intelligent functions, including IEEE 1588 PTPv2, EtherNet/IP, Modbus TCP, LLDP, DHCP Option 82, SNMP Inform, QoS, IGMP snooping, VLAN, TACACS+, IEEE 802.1X, HTTPS, SSH, SNMPv3, and more, making the Ethernet switches suitable for any harsh industrial environment.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- SNMP Inform for ensuring reliable event management
- LLDP for automated topology discovery
- DHCP Option 82 for IP address assignment with different policies
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for time synchronization of networks<sup>2</sup>
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Port mirroring for online debugging
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and ToS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

### Specifications

#### Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC                     |

1. Gigabit Ethernet recovery time < 50 ms  
2. The CM-600-4TX-PTP module is required for hardware-based IEEE 1588 PTPv2.



## Ethernet Interface

|           |   |
|-----------|---|
| Module    | 4 slots for any combination of 4-port interface modules, 10/100BaseT(X) or 100BaseFX  |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP  |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL, G1/G2/G3 |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 1 removable 6-contact terminal block(s) |
| Input Voltage               | 12/24/48 VDC, Redundant dual inputs     |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 185 x 151 x 157.2 mm (7.28 x 5.95 x 6.19 in)         |
| Weight       | 2950 g (6.51 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-619: 0 to 60°C (32 to 140°F)<br>EDS-619-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |  |
|---------------------|--|
| Freefall            | IEC 60068-2-32   |
| EMC                 | EN 55032/24, EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2   |
| Maritime            | ABS, DNV-GL, LR, NK  |
| Railway             | EN 50121-4   |
| Safety              | EN 60950-1, UL 508, UL 60950-1   |
| Shock               | IEC 60068-2-27   |
| Traffic Control     | NEMA TS2   |
| Vibration           | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 475,816 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|        |                               |
|--------|-------------------------------|
| Device | 1 x EDS-619 Series switch     |
| Cable  | 1 x RJ45-to-DB9 console cable |

|               |   |
|---------------|---|
| Documentation | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note          | SFP modules and/or modules from the CM-600 Module Series need to be purchased separately for use with this product.   |

## Dimensions

Unit: mm (inch)

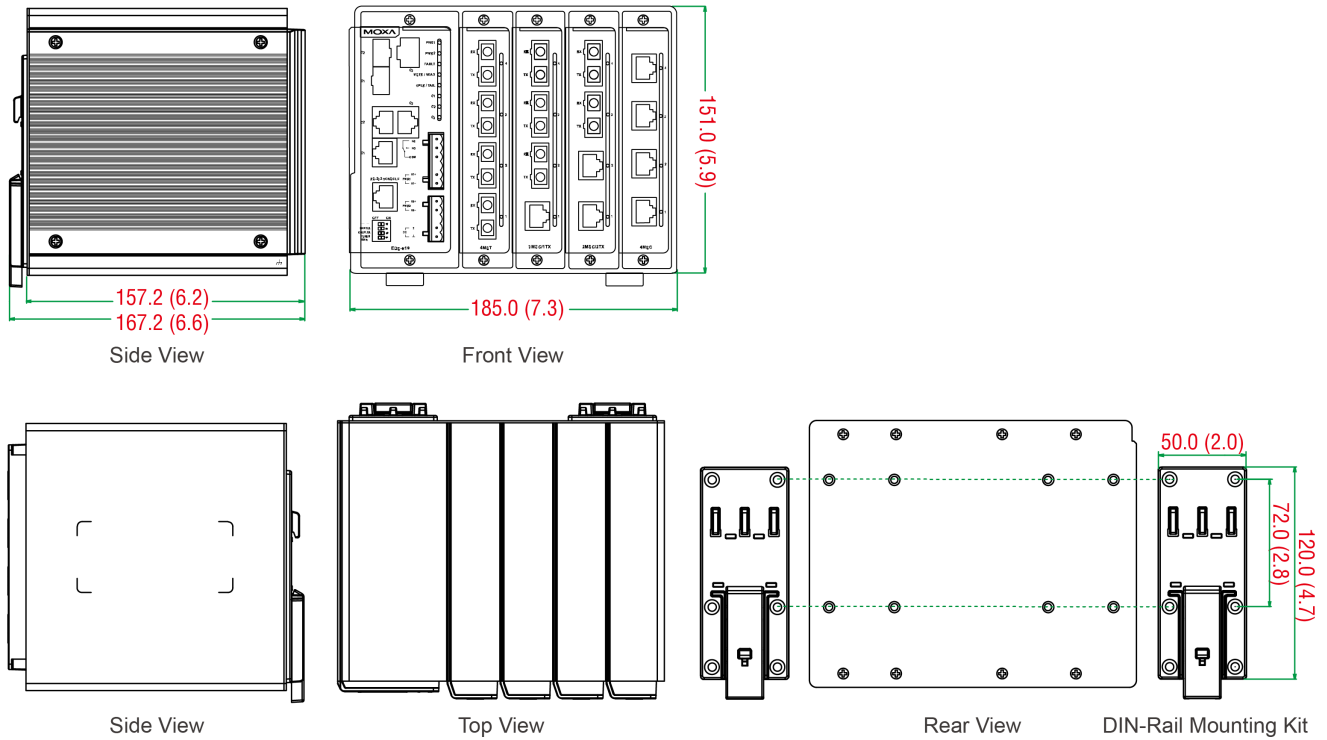

## Ordering Information

| Model Name | Layer | Total No. of Ports | Module<br>10/100BaseT(X) and/or<br>100BaseFX               | Combo Ports<br>10/100/1000BaseT(X)<br>or 100/1000BaseSFP | Operating Temp. |
|------------|-------|--------------------|--|--|-----------------|
| EDS-619    | 2     | 19                 | 4 slots for up to 16 10/100BaseT(X) and/or 100BaseFX ports | 3  | 0 to 60°C       |
| EDS-619-T  | 2     | 19                 | 4 slots for up to 16 10/100BaseT(X) and/or 100BaseFX ports | 3  | -40 to 75°C     |

## Accessories (sold separately)

### CM-600 Module Series

|                |   |
|----------------|---|
| CM-600-4TX     | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, -40 to 75°C operating temperature                                    |
| CM-600-4TX-BP  | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, bypass support, -40 to 75°C operating temperature                    |
| CM-600-4TX-PTP | Fast Ethernet interface module with 4 10/100BaseT(X) ports, RJ45 connectors, IEEE 1588 PTP V2 protocol support, -40 to 75°C operating temperature |
| CM-600-4MSC    | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature                                |

|                 |  |
|-----------------|--|
| CM-600-4MST     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature   |
| CM-600-4SSC     | Fast Ethernet interface module with 4 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-3MSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature    |
| CM-600-3MST/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature    |
| CM-600-3SSC/1TX | Fast Ethernet interface module with 1 10/100BaseT(X) port, RJ45 connector, and 3 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature   |
| CM-600-2MSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, SC connectors, -40 to 75°C operating temperature  |
| CM-600-2MST/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX multi-mode ports, ST connectors, -40 to 75°C operating temperature  |
| CM-600-2SSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports, RJ45 connectors, and 2 100BaseFX single-mode ports, SC connectors, -40 to 75°C operating temperature |

#### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

#### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |

|                |   |
|----------------|---|
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXLC-T  | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC    | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature      |
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

#### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

#### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-75 | Wall-mounting kit, 2 plates, 8 screws, 75 x 90 x 2.5 mm |
|-------|---|

#### Anti-Vibration Wiring Kits

|        |                           |
|--------|---------------------------|
| AVK-17 | Anti-vibration wiring kit |
|--------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-728 Series

## 24+4G-port Layer 2 Gigabit modular managed Ethernet switches



### Features and Benefits

- 4 Gigabit plus 24 Fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-728 Series features a versatile modular design that allows different combinations of fiber and copper modules, creating a wide array of connection options ideal for any automation network. The modular design lets you install up to 4 Gigabit ports and 24 Fast Ethernet ports. The EDS-728 Series is specially designed for redundant Gigabit network backbones and uses a modular configuration to provide a high degree of flexibility for network expansion.

Top network performance, security, and reliability are assured through the EDS-728 Series advanced management and security features. The EDS-728 Series also features industrial-grade construction, a console port for automatic configuration backup, and an angled LED troubleshooting panel that can be conveniently viewed from both horizontal and vertical orientations.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual DC power inputs
- Configurable by Web browser, Telnet/serial console, CLI, Windows utility, and ABC-01 automatic backup configurator

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 2, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 2   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

1. Gigabit Ethernet recovery time < 50 ms

## Ethernet Interface

|                       |  |
|-----------------------|--|
| Module                | 6 slots for any combination of 4-port interface modules, 10/100BaseT(X) or 100BaseFX;<br>2 slots for any combination of 2-port interface modules, 10/100/1000BaseT(X) or 1000BaseSFP   |
| Pre-installed Modules | EDS-72810G-2GSFP: 1 x IM-2GSFP<br>EDS-72810G-2GTX2GSFP: 1 x IM-2GTX<br>1 x IM-2GSFP<br>EDS-72810G-4GSFP: 2 x IM-2GSFP<br>EDS-72810G-4GTX: 2 x IM-2GTX  |
| Standards             | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseX |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | GMRP, GVRP, IGMP v1/v2, QinQ VLAN   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+  |
| Time Management      | NTP Server/Client, SNTP, IEEE 1588v2 PTP (software-based)   |
| Filter               | VLAN unaware, 802.1Q VLAN   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 32 Mbits      |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## Power Parameters

|               |   |
|---------------|---|
| Connection    | 2 removable 6-contact terminal block(s) |
| Input Current | 0.82 A @ 24 VDC                         |
| Input Voltage | 24 VDC, Redundant dual inputs           |




|  |  |
|--|--|
| Operating Voltage                      | 12 to 45 VDC   |
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| <b>Physical Characteristics</b>        |  |
| IP Rating                              | IP30   |
| Dimensions                             | 362.4 x 142.5 x 128 mm (14.27 x 5.61 x 5.04 in)  |
| Weight                                 | 1950 g (4.30 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)   |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | 0 to 60°C (32 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Freefall                               | IEC 60068-2-32   |
| EMC                                    | EN 55032/24  |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                               | ABS, DNV-GL, LR, NK  |
| Safety                                 | EN 60950-1, UL 508, UL 60950-1, CSA C22.2 No. 60950-1  |
| Shock                                  | IEC 60068-2-27   |
| Vibration                              | IEC 60068-2-6  |
| <b>MTBF</b>                            |  |
| Time                                   | 191,203 hrs  |
| Standards                              | Telcordia SR332  |
| <b>Warranty</b>                        |  |
| Warranty Period                        | 5 years  |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |
| <b>Package Contents</b>                |  |
| Device                                 | 1 x EDS-728 Series switch  |
| Cable                                  | 1 x RJ45-to-DB9 console cable  |

|               |   |
|---------------|---|
| Documentation | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note          | SFP modules and/or modules from the IM Module Series need to be purchased separately for use with this product.   |

## Dimensions

Unit: mm (inch)

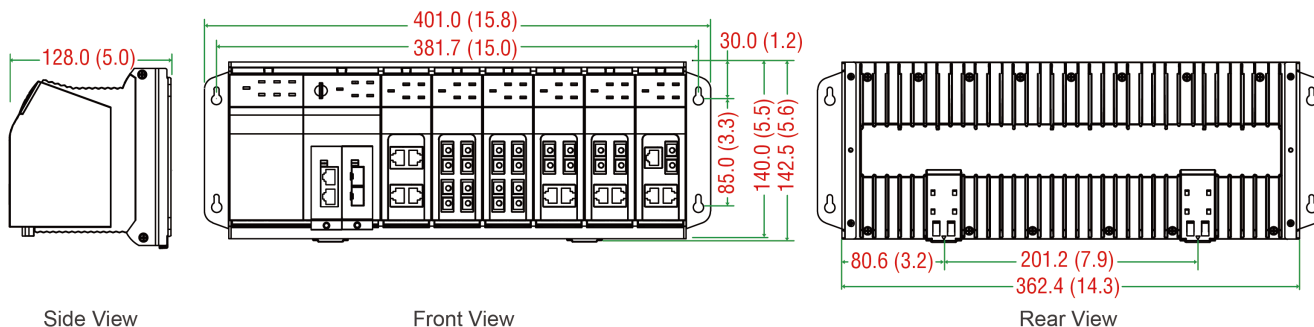

## Ordering Information

| Model Name           | Layer | Total No. of Ports | IM-2G Series Module 10/100/1000BaseT(X) or 1000BaseSFP  | IM Series Module 10/100BaseT(X) and/or 100BaseFX           | Operating Temp. |
|----------------------|-------|--------------------|---|--|-----------------|
| EDS-72810G           | 2     | 28                 | 2 slots for up to 4 10/100/1000BaseT(X) or 1000BaseSFP ports  | 6 slots for up to 24 10/100BaseT(X) and/or 100BaseFX ports | 0 to 60°C       |
| EDS-72810G-4GTX      | 2     | 28                 | 2 IM-2GTX preinstalled; 2 slots for up to 4 10/100/1000BaseT(X) or 1000BaseSFP ports                | 6 slots for up to 24 10/100BaseT(X) and/or 100BaseFX ports | 0 to 60°C       |
| EDS-72810G-2GSFP     | 2     | 28                 | 1 IM-2GSFP preinstalled; 2 slots for up to 4 10/100/1000BaseT(X) or 1000BaseSFP ports               | 6 slots for up to 24 10/100BaseT(X) and/or 100BaseFX ports | 0 to 60°C       |
| EDS-72810G-4GSFP     | 2     | 28                 | 2 IM-2GSFP preinstalled; 2 slots for up to 4 10/100/1000BaseT(X) or 1000BaseSFP ports               | 6 slots for up to 24 10/100BaseT(X) and/or 100BaseFX ports | 0 to 60°C       |
| EDS-72810G-2GTX2GSFP | 2     | 28                 | 1 IM-2GTX and 1 IM-2GSFP preinstalled; 2 slots for up to 4 10/100/1000BaseT(X) or 1000BaseSFP ports | 6 slots for up to 24 10/100BaseT(X) and/or 100BaseFX ports | 0 to 60°C       |

## Accessories (sold separately)

### IM Module Series

|             |   |
|-------------|---|
| IM-1LSC/3TX | Fast Ethernet interface AC module with 3 10/100BaseT(X) ports and 1 100BaseFX single-mode port (SC connector for 80 km transmission), 0 to 60°C operating temperature               |
| IM-2GSFP    | Gigabit Ethernet interface module with 2 1000BaseSFP slots (see the SFP-1G series ordering information for available Gigabit Ethernet SFP modules), 0 to 60°C operating temperature |
| IM-2GTX     | Gigabit Ethernet interface module with 2 10/100/1000BaseT(X) ports, 0 to 60°C operating temperature   |
| IM-2MSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports and 2 100BaseFX multi-mode ports (SC connectors), 0 to 60°C operating temperature  |

|             |   |
|-------------|---|
| IM-2MST/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports and 2 100BaseFX multi-mode ports (ST connectors), 0 to 60°C operating temperature  |
| IM-2SSC/2TX | Fast Ethernet interface module with 2 10/100BaseT(X) ports and 2 100BaseFX single-mode ports (SC connectors), 0 to 60°C operating temperature |
| IM-4MSC     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports (SC connectors), 0 to 60°C operating temperature                             |
| IM-4MST     | Fast Ethernet interface module with 4 100BaseFX multi-mode ports (ST connectors), 0 to 60°C operating temperature                             |
| IM-4SSC     | Fast Ethernet interface module with 4 100BaseFX single-mode ports (SC connectors), 0 to 60°C operating temperature                            |
| IM-4TX      | Fast Ethernet interface module with 4 10/100BaseT(X) ports, 0 to 60°C operating temperature   |

#### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

#### SFP Modules

|                |  |
|----------------|--|
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |

|               |   |
|---------------|---|
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T  | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T  | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T  | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|       |   |
|-------|---|
| WK-32 | Wall-mounting kit, 2 plates, 6 screws, 30.3 x 140 x 12.3 mm |
|-------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-4008 Series

8-port (with options of 4 802.3bt PoE ports or 4 Giga uplink ports) managed Ethernet switches



## Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)<sup>1</sup>, and RSTP/STP for network redundancy
- Support for IEEE 802.3bt PoE for up to 90 W output per port
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

## Certifications



## Introduction

The EDS-4008 Series is a range of 8-port managed Fast Ethernet switches with the option for four 1 Gbps uplink ports or two 100M ST/SC fiber-optic ports. This Series also offers models with four 10/100BaseT(X) 802.3af (PoE), 802.3at (PoE+), and 802.3bt-compliant Ethernet PoE port options to connect high-bandwidth PoE devices.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-4008 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone.

The EDS-4008 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-4008-LV/-HV/-T models: 8<br>EDS-4008-2MST-LV/-HV/-T models: 6<br>EDS-4008-2MSC-LV/-HV/-T models: 6<br>EDS-4008-2SSC-LV/-HV/-T models: 6<br>EDS-4008-2GT-2GS-LV/-HV/-T models: 4<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| PoE Ports (10/100BaseT(X), RJ45 connector) | EDS-4008-4P-2GT-2GS-LVA/-LVB/-T models: 4   |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-4008-2MSC-LV/-HV/-T models: 2   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-4008-2MST-LV/-HV/-T models: 2   |
| 100BaseFX Ports (single-mode SC connector) | EDS-4008-SSC-LV/-HV/-T models: 2  |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | EDS-4008-2GT-2GS-LV/-HV/-T models: 2<br>EDS-4008-4P-2GS-2GT-LVA/-LVB/-T models: 2   |
| 100/1000BaseSFP Slots                      | EDS-4008-2GT-2GS-LV/-HV/-T models: 2<br>EDS-4008-4P-2GT-2GS-LVA/-LVB/-T models: 2   |

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

|           |  |
|-----------|--|
| Standards | <p>IEEE 802.3 for 10BaseT<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.3ab for 1000BaseT(X)<br/> IEEE 802.3z for 1000BaseX<br/> IEEE 802.3x for flow control<br/> IEEE 802.3ad for Port Trunk with LACP<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.1X for authentication</p> |
|-----------|--|

|               |   |                         |              |       |              |
|---------------|---|-------------------------|--------------|-------|--------------|
| Optical Fiber | <b>100BaseFX</b>  |                         |              |       |              |
|               | Multi-Mode  |                         | Single-Mode  |       |              |
|               | Fiber Cable Type  | OM1                     | 50/125 μm    | G.652 |              |
|               |   |                         | 800 MHz x km |       |              |
|               | Typical Distance  |                         | 4 km         | 5 km  | 40 km        |
|               | Wavelength  | Typical (nm)            | 1300         |       | 1310         |
|               |   | TX Range (nm)           | 1260 to 1360 |       | 1280 to 1340 |
|               |   | RX Range (nm)           | 1100 to 1600 |       | 1100 to 1600 |
|               | Optical Power   | TX Range (dBm)          | -10 to -20   |       | 0 to -5      |
|               |   | RX Range (dBm)          | -3 to -32    |       | -3 to -34    |
|               |   | Link Budget (dB)        | 12           |       | 29           |
|               |   | Dispersion Penalty (dB) | 3            |       | 1            |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.<br/> Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |              |       |              |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

### Switch Properties

|                   |          |
|-------------------|----------|
| MAC Table Size    | 16 K     |
| Jumbo Frame Size  | 9.216 KB |
| Max. No. of VLANs | 256      |

|                                 |  |
|---------------------------------|--|
| VLAN ID Range                   | VID 1 to 4094  |
| IGMP Groups                     | 512  |
| Priority Queues                 | 4  |
| Packet Buffer Size              | 1 MB   |
| <b>LED Interface</b>            |  |
| LED Indicators                  | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC   |
| <b>Serial Interface</b>         |  |
| Console Port                    | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)   |
| <b>USB Interface</b>            |  |
| USB Connector                   | USB Type A (Reserved)  |
| <b>Input/Output Interface</b>   |  |
| Alarm Contact Channels          | 1, Relay output with current carrying capacity of 1 A @ 24 VDC   |
| Digital Input Channels          | 1  |
| Digital Inputs                  | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA  |
| Buttons                         | Reset button   |
| <b>DIP Switch Configuration</b> |  |
| DIP Switches                    | Turbo Ring, Master, Coupler, Reserve   |
| <b>Power Parameters</b>         |  |
| Connection                      | 2 removable 4-contact terminal block(s)  |
| Pre-installed Power Module      | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I<br>-LVA/-LVA-T models: PWR-101-LV-BP-I<br>-LVB/-LVB-T models: PWR-103-LV-VB-I   |
| Note                            | The EDS-4008 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-4008-T + PWR-100-LV = EDS-4008-LV-T<br>EDS-4008-T + PWR-105-HV-I = EDS-4008-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-4008-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-4008-HV-T. |
| Input Voltage                   | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input<br>-LVA/-LVA-T models: 48 VDC, Redundant dual inputs<br>-LVB/-LVB-T models: 12/24/48 VDC, Redundant dual inputs   |
| Operating Voltage               | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC<br>-LVA/-LVA-T models: 44 to 57 VDC (> 52 VDC for PoE+ output recommended)<br>-LVB/-LVB-T models: 12 to 57 VDC (> 52 VDC for PoE+ output recommended)  |
| Input Current                   | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A<br>-LVA/-LVA-T models: 48 VDC, 5.42 A<br>-LVB/-LVB-T models: 12/48 VDC, 7.46/4.27 A or 24 VDC, 7.26 A   |

|                                |   |
|--------------------------------|---|
| Power Consumption (Max.)       | <p>EDS-4008-LV(-T) models: 7.20 W<br/> EDS-4008-HV(-T) models: 8.13 W<br/> EDS-4008-2MST-LV(-T) models: 8.45 W<br/> EDS-4008-2MST-HV(-T) models: 11.13 W<br/> EDS-4008-2MSC-LV(-T) models: 8.45 W<br/> EDS-4008-2MSC-HV(-T) models: 11.09 W<br/> EDS-4008-2SSC-LV(-T) models: 8.98 W<br/> EDS-4008-2SSC-HV(-T) models: 11.37 W<br/> EDS-4008-2GT-2GS-LV(-T) models: 9.41 W<br/> EDS-4008-2GT-2GS-HV(-T) models: 11.17 W</p> <p>EDS-4008-4P-2GT-2GS-LVA(-T) models:<br/> Without PoE: 11.22 W<br/> With PoE: Max. 240 W for total PD power consumption @ 48 VDC input</p> <p>EDS-4008-4P-2GT-2GS-LVB(-T) models:<br/> Without PoE: 15.84 W<br/> With PoE:<br/> Max. 180 W for total PD power consumption @ 48 VDC input;<br/> Max. 150 W for total PD power consumption @ 24 VDC input;<br/> Max. 62 W for total PD power consumption @ 12 VDC input</p> |
| Max. PoE Power Output per Port | PoE models: 90 W  |
| Overload Current Protection    | Supported   |
| Reverse Polarity Protection    | Supported   |

### Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | <p>EDS-4008(-T), EDS-4008-2MSC(-T), EDS-4008-2SSC(-T) models:<br/> 55 x 140 x 120 mm (2.2 x 5.51 x 4.72 in)<br/> EDS-4008-2MST(-T) models:<br/> 55 x 140 x 132 mm (2.2 x 5.51 x 5.2 in)<br/> EDS-4008-2GT-2GS(-T), EDS-4008-4P-2GT-2GS(-T) models:<br/> 55 x 140 x 122.5 mm (2.2 x 5.51 x 4.82 in)</p> |
| Weight       | <p>EDS-4008(-T) models: 857 g (1.89 lb)<br/> EDS-4008-2MSC(-T) models: 886 g (1.95 lb)<br/> EDS-4008-2MST(-T) models: 810 g (1.79 lb)<br/> EDS-4008-2SSC(-T) models: 882 g (1.94 lb)<br/> EDS-4008-2GT-2GS(-T) models: 795 g (1.75 lb)<br/> EDS-4008-4P-2GT-2GS(-T) models: 840 g (1.85 lb)</p>        |
| Installation | DIN-rail mounting, Wall mounting (with optional kit)   |
| Housing      | Metal  |

### Environmental Limits

|  |  |
|--|--|
| Operating Temperature                  | <p>Standard Models: -10 to 60°C (14 to 140°F)<br/> Wide Temp. Models: -40 to 75°C (-40 to 167°F)</p> |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

### Standards and Certifications

|                          |  |
|--------------------------|--|
| Industrial Cybersecurity | IEC 62443-4-1<br>IEC 62443-4-2               |
| Safety                   | UL 61010-2-201, EN 62368-1 (LVD)             |
| EMC                      | EN 55032/35, EN 61000-6-2/-6-4               |
| EMI                      | CISPR 32, FCC Part 15B Class A               |
| EMS                      | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV |



|                  |   |
|------------------|---|
|                  | IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime         | -LV/-LV-T, PoE/PoE-T models: DNV, ABS, NK, LR   |
| Vibration        | IEC 60068-2-6   |
| Shock            | IEC 60068-2-27  |
| Freefall         | IEC 60068-2-32  |
| Railway          | EN 50121-4  |
| Traffic Control  | NEMA TS2  |
| Power Substation | IEC 61850-3, IEEE 1613 Class 1  |

#### MTBF

|           |  |
|-----------|--|
| Time      | EDS-4008-LV/-LV-T models: 1,121,399 hrs<br>EDS-4008-HV/-HV-T models: 513,575 hrs<br>EDS-4008-2MSC-LV/-LV-T models: 1,014,299 hrs<br>EDS-4008-2MSC-HV/-HV-T models: 492,582 hrs<br>EDS-4008-2MST-LV/-LV-T models: 1,015,718 hrs<br>EDS-4008-2MST-HV/-HV-T models: 492,582 hrs<br>EDS-4008-2SSC-LV/-LV-T models: 1,015,718 hrs<br>EDS-4008-2SSC-HV/-HV-T models: 492,582 hrs<br>EDS-4008-2GT-2GS-LV/-LV-T models: 1,074,099 hrs<br>EDS-4008-2GT-2GS-HV/-HV-T models: 505,936 hrs<br>EDS-4008-4P-2GT-2GS-LVA/-LVA-T models: 923,670 hrs<br>EDS-4008-4P-2GT-2GS-LVB/-LVB-T models: 870,865 hrs hrs |
| Standards | Telcordia SR332  |

#### Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


#### Package Contents

|               |   |
|---------------|---|
| Device        | 1 x EDS-4008 Series switch  |
| Documentation | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

# Dimensions


## EDS-4008(-T), EDS-4008-2MSC(-T), EDS-4008-2SSC(-T) Models

Unit: mm (inch)

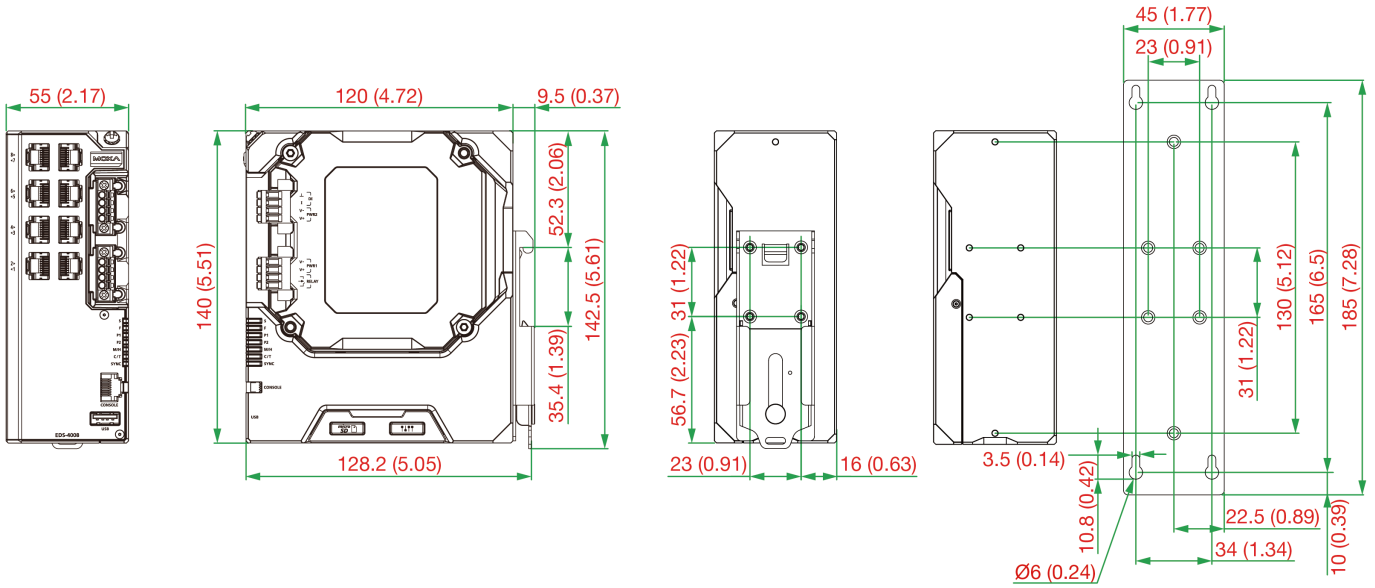


## EDS-4008-2MST(-T) Models

Unit: mm (inch)

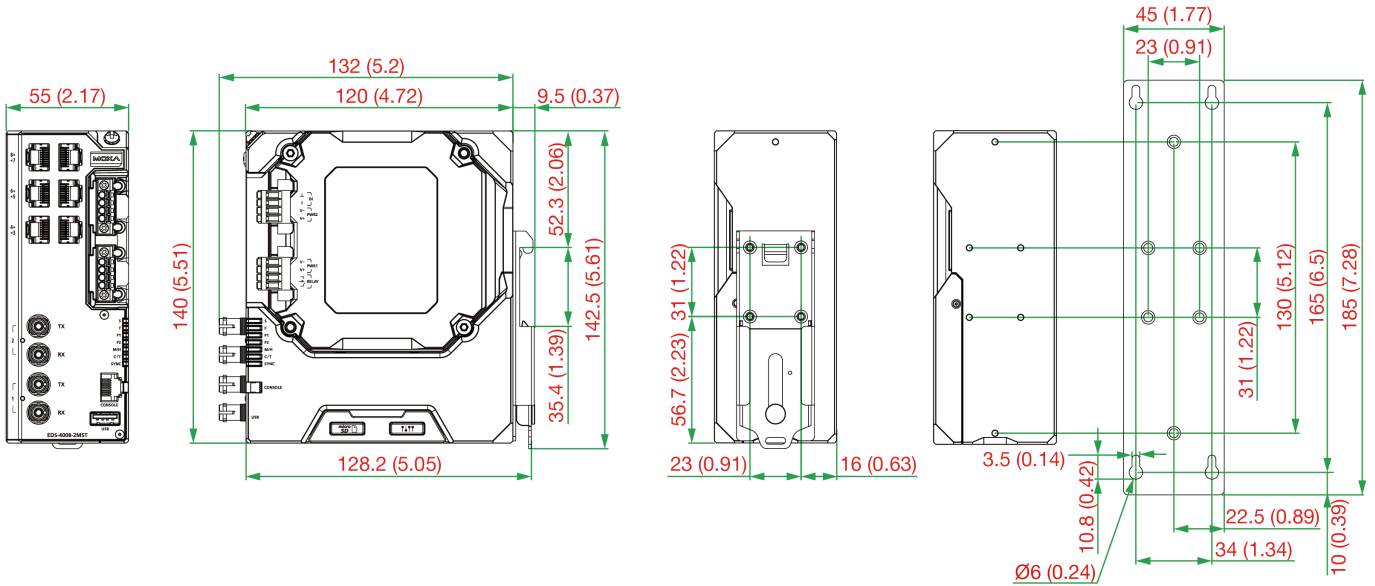

## EDS-4008-2GT-2GS(-T), EDS-4008-4P-2GT-2GS(-T) Models

Unit: mm (inch)

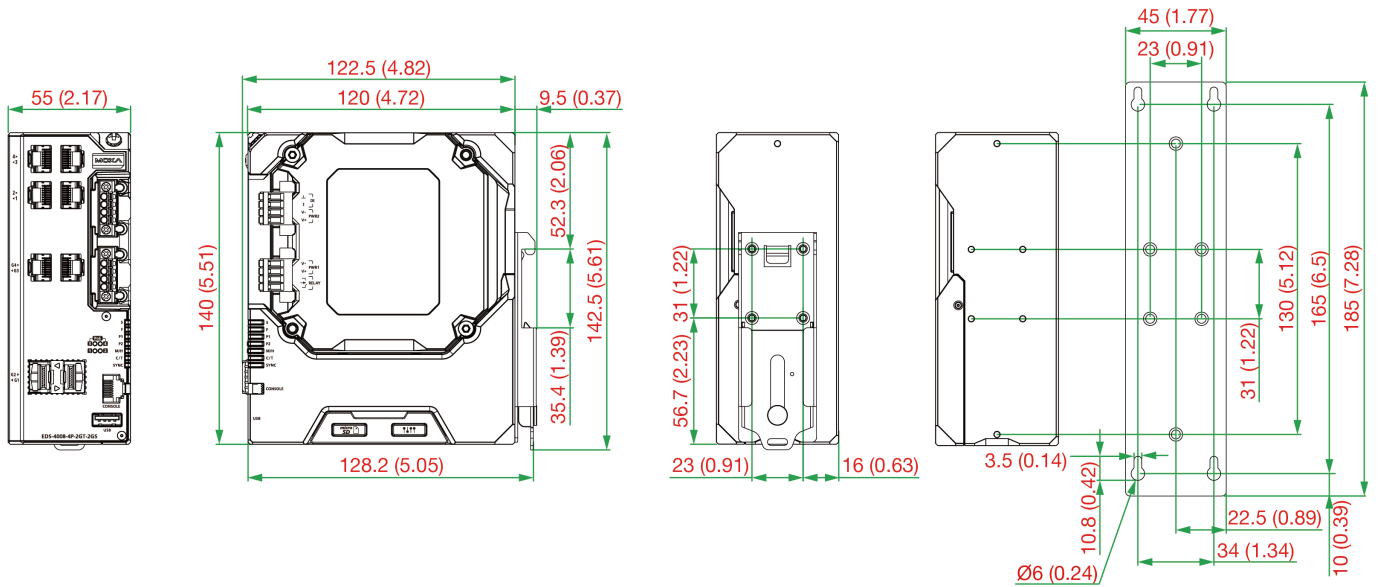

## Ordering Information

| Model Name         | 10/100 BaseT(X) Ports (RJ45 Connector) | 100 BaseFX Ports (Multi-mode SC Connector) | 100 BaseFX Ports (Multi-mode ST Connector) | 100 BaseFX Ports (Single-mode SC Connector) | PoE 10/100 BaseT(X) Ports (RJ45 Connector) | 10/100/1000 BaseT(X) Ports (RJ45 Connector) | 100/1000 BaseSFP Slots | Operating Voltage            | Pre-installed Power Module | Operating Temp. |
|--------------------|--|--|--|---|--|---|------------------------|------------------------------|----------------------------|-----------------|
| EDS-4008-LV        | 8                                      | -  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-LV-T      | 8                                      | -  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-HV        | 8                                      | -  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-HV-T      | 8                                      | -  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-2MSC-LV   | 6                                      | 2  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2MSC-LV-T | 6                                      | 2  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2MSC-HV   | 6                                      | 2  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2MSC-HV-T | 6                                      | 2  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-2MST-LV   | 6                                      | -  | 2  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2MST-LV-T | 6                                      | -  | 2  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2MST-HV   | 6                                      | -  | 2  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2MST-HV-T | 6                                      | -  | 2  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |

| Model Name                | 10/100 BaseT(X) Ports (RJ45 Connector) | 100 BaseFX Ports (Multi-mode SC Connector) | 100 BaseFX Ports (Multi-mode ST Connector) | 100 BaseFX Ports (Single-mode SC Connector) | PoE 10/100 BaseT(X) Ports (RJ45 Connector) | 10/100/1000 BaseT(X) Ports (RJ45 Connector) | 100/1000 BaseSFP Slots | Operating Voltage                                   | Pre-installed Power Module | Operating Temp. |
|---------------------------|--|--|--|---|--|---|------------------------|---|----------------------------|-----------------|
| EDS-4008-2SSC-LV          | 6                                      | -  | -  | 2   | -  | -   | -                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2SSC-LV-T        | 6                                      | -  | -  | 2   | -  | -   | -                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2SSC-HV          | 6                                      | -  | -  | 2   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2SSC-HV-T        | 6                                      | -  | -  | 2   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-2GT-2GS-LV       | 4                                      | -  | -  | -   | -  | 2   | 2                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2GT-2GS-LV-T     | 4                                      | -  | -  | -   | -  | 2   | 2                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2GT-2GS-HV       | 4                                      | -  | -  | -   | -  | 2   | 2                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2GT-2GS-HV-T     | 4                                      | -  | -  | -   | -  | 2   | 2                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-4P-2GT-2GS-LVA   | -                                      | -  | -  | -   | 4  | 2   | 2                      | 44 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-101-LV-BP-I            | -10 to 60°C     |
| EDS-4008-4P-2GT-2GS-LVA-T | -                                      | -  | -  | -   | 4  | 2   | 2                      | 44 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-101-LV-BP-I            | -40 to 75°C     |
| EDS-4008-4P-2GT-2GS-LVB   | -                                      | -  | -  | -   | 4  | 2   | 2                      | 12 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-103-LV-VB-I            | -10 to 60°C     |
| EDS-4008-4P-2GT-2GS-LVB-T | -                                      | -  | -  | -   | 4  | 2   | 2                      | 12 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-103-LV-VB-I            | -40 to 75°C     |

## Accessories (sold separately)

### SFP Modules

|                |  |
|----------------|--|
| SFP-1GEZXL     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXL-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHL      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |

|               |  |
|---------------|--|
| SFP-1GLHXLC   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXLC    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T  | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXLC-T  | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC-T  | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXLC-T  | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |

## Power Supplies

|           |   |
|-----------|---|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
|-----------|---|

|            |  |
|------------|--|
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-4008 Series

8-port (with options of 4 802.3bt PoE ports or 4 Giga uplink ports) managed Ethernet switches



## Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)<sup>1</sup>, and RSTP/STP for network redundancy
- Support for IEEE 802.3bt PoE for up to 90 W output per port
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

## Certifications



## Introduction

The EDS-4008 Series is a range of 8-port managed Fast Ethernet switches with the option for four 1 Gbps uplink ports or two 100M ST/SC fiber-optic ports. This Series also offers models with four 10/100BaseT(X) 802.3af (PoE), 802.3at (PoE+), and 802.3bt-compliant Ethernet PoE port options to connect high-bandwidth PoE devices.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-4008 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone.

The EDS-4008 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-4008-LV/-HV/-T models: 8<br>EDS-4008-2MST-LV/-HV/-T models: 6<br>EDS-4008-2MSC-LV/-HV/-T models: 6<br>EDS-4008-2SSC-LV/-HV/-T models: 6<br>EDS-4008-2GT-2GS-LV/-HV/-T models: 4<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| PoE Ports (10/100BaseT(X), RJ45 connector) | EDS-4008-4P-2GT-2GS-LVA/-LVB/-T models: 4   |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-4008-2MSC-LV/-HV/-T models: 2   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-4008-2MST-LV/-HV/-T models: 2   |
| 100BaseFX Ports (single-mode SC connector) | EDS-4008-SSC-LV/-HV/-T models: 2  |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | EDS-4008-2GT-2GS-LV/-HV/-T models: 2<br>EDS-4008-4P-2GS-2GT-LVA/-LVB/-T models: 2   |
| 100/1000BaseSFP Slots                      | EDS-4008-2GT-2GS-LV/-HV/-T models: 2<br>EDS-4008-4P-2GT-2GS-LVA/-LVB/-T models: 2   |

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

|           |  |
|-----------|--|
| Standards | <p>IEEE 802.3 for 10BaseT<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.3ab for 1000BaseT(X)<br/> IEEE 802.3z for 1000BaseX<br/> IEEE 802.3x for flow control<br/> IEEE 802.3ad for Port Trunk with LACP<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.1X for authentication</p> |
|-----------|--|

|               |   |                         |              |       |              |
|---------------|---|-------------------------|--------------|-------|--------------|
| Optical Fiber | 100BaseFX   |                         |              |       |              |
|               | Multi-Mode  |                         | Single-Mode  |       |              |
|               | Fiber Cable Type  | OM1                     | 50/125 μm    | G.652 |              |
|               |   |                         | 800 MHz x km |       |              |
|               | Typical Distance  |                         | 4 km         | 5 km  | 40 km        |
|               | Wavelength  | Typical (nm)            | 1300         |       | 1310         |
|               |   | TX Range (nm)           | 1260 to 1360 |       | 1280 to 1340 |
|               |   | RX Range (nm)           | 1100 to 1600 |       | 1100 to 1600 |
|               | Optical Power   | TX Range (dBm)          | -10 to -20   |       | 0 to -5      |
|               |   | RX Range (dBm)          | -3 to -32    |       | -3 to -34    |
|               |   | Link Budget (dB)        | 12           |       | 29           |
|               |   | Dispersion Penalty (dB) | 3            |       | 1            |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.<br/> Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |              |       |              |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

### Switch Properties

|                   |          |
|-------------------|----------|
| MAC Table Size    | 16 K     |
| Jumbo Frame Size  | 9.216 KB |
| Max. No. of VLANs | 256      |



|                                 |  |
|---------------------------------|--|
| VLAN ID Range                   | VID 1 to 4094  |
| IGMP Groups                     | 512  |
| Priority Queues                 | 4  |
| Packet Buffer Size              | 1 MB   |
| <b>LED Interface</b>            |  |
| LED Indicators                  | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC   |
| <b>Serial Interface</b>         |  |
| Console Port                    | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)   |
| <b>USB Interface</b>            |  |
| USB Connector                   | USB Type A (Reserved)  |
| <b>Input/Output Interface</b>   |  |
| Alarm Contact Channels          | 1, Relay output with current carrying capacity of 1 A @ 24 VDC   |
| Digital Input Channels          | 1  |
| Digital Inputs                  | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA  |
| Buttons                         | Reset button   |
| <b>DIP Switch Configuration</b> |  |
| DIP Switches                    | Turbo Ring, Master, Coupler, Reserve   |
| <b>Power Parameters</b>         |  |
| Connection                      | 2 removable 4-contact terminal block(s)  |
| Pre-installed Power Module      | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I<br>-LVA/-LVA-T models: PWR-101-LV-BP-I<br>-LVB/-LVB-T models: PWR-103-LV-VB-I   |
| Note                            | The EDS-4008 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-4008-T + PWR-100-LV = EDS-4008-LV-T<br>EDS-4008-T + PWR-105-HV-I = EDS-4008-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-4008-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-4008-HV-T. |
| Input Voltage                   | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input<br>-LVA/-LVA-T models: 48 VDC, Redundant dual inputs<br>-LVB/-LVB-T models: 12/24/48 VDC, Redundant dual inputs   |
| Operating Voltage               | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC<br>-LVA/-LVA-T models: 44 to 57 VDC (> 52 VDC for PoE+ output recommended)<br>-LVB/-LVB-T models: 12 to 57 VDC (> 52 VDC for PoE+ output recommended)  |
| Input Current                   | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A<br>-LVA/-LVA-T models: 48 VDC, 5.42 A<br>-LVB/-LVB-T models: 12/48 VDC, 7.46/4.27 A or 24 VDC, 7.26 A   |

|                                |   |
|--------------------------------|---|
| Power Consumption (Max.)       | <p>EDS-4008-LV(-T) models: 7.20 W<br/> EDS-4008-HV(-T) models: 8.13 W<br/> EDS-4008-2MST-LV(-T) models: 8.45 W<br/> EDS-4008-2MST-HV(-T) models: 11.13 W<br/> EDS-4008-2MSC-LV(-T) models: 8.45 W<br/> EDS-4008-2MSC-HV(-T) models: 11.09 W<br/> EDS-4008-2SSC-LV(-T) models: 8.98 W<br/> EDS-4008-2SSC-HV(-T) models: 11.37 W<br/> EDS-4008-2GT-2GS-LV(-T) models: 9.41 W<br/> EDS-4008-2GT-2GS-HV(-T) models: 11.17 W</p> <p>EDS-4008-4P-2GT-2GS-LVA(-T) models:<br/> Without PoE: 11.22 W<br/> With PoE: Max. 240 W for total PD power consumption @ 48 VDC input</p> <p>EDS-4008-4P-2GT-2GS-LVB(-T) models:<br/> Without PoE: 15.84 W<br/> With PoE:<br/> Max. 180 W for total PD power consumption @ 48 VDC input;<br/> Max. 150 W for total PD power consumption @ 24 VDC input;<br/> Max. 62 W for total PD power consumption @ 12 VDC input</p> |
| Max. PoE Power Output per Port | PoE models: 90 W  |
| Overload Current Protection    | Supported   |
| Reverse Polarity Protection    | Supported   |

### Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | <p>EDS-4008(-T), EDS-4008-2MSC(-T), EDS-4008-2SSC(-T) models:<br/> 55 x 140 x 120 mm (2.2 x 5.51 x 4.72 in)<br/> EDS-4008-2MST(-T) models:<br/> 55 x 140 x 132 mm (2.2 x 5.51 x 5.2 in)<br/> EDS-4008-2GT-2GS(-T), EDS-4008-4P-2GT-2GS(-T) models:<br/> 55 x 140 x 122.5 mm (2.2 x 5.51 x 4.82 in)</p> |
| Weight       | <p>EDS-4008(-T) models: 857 g (1.89 lb)<br/> EDS-4008-2MSC(-T) models: 886 g (1.95 lb)<br/> EDS-4008-2MST(-T) models: 810 g (1.79 lb)<br/> EDS-4008-2SSC(-T) models: 882 g (1.94 lb)<br/> EDS-4008-2GT-2GS(-T) models: 795 g (1.75 lb)<br/> EDS-4008-4P-2GT-2GS(-T) models: 840 g (1.85 lb)</p>        |
| Installation | DIN-rail mounting, Wall mounting (with optional kit)   |
| Housing      | Metal  |

### Environmental Limits

|  |  |
|--|--|
| Operating Temperature                  | <p>Standard Models: -10 to 60°C (14 to 140°F)<br/> Wide Temp. Models: -40 to 75°C (-40 to 167°F)</p> |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

### Standards and Certifications

|                          |  |
|--------------------------|--|
| Industrial Cybersecurity | IEC 62443-4-1<br>IEC 62443-4-2               |
| Safety                   | UL 61010-2-201, EN 62368-1 (LVD)             |
| EMC                      | EN 55032/35, EN 61000-6-2/-6-4               |
| EMI                      | CISPR 32, FCC Part 15B Class A               |
| EMS                      | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV |

|                  |   |
|------------------|---|
|                  | IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime         | -LV/-LV-T, PoE/PoE-T models: DNV, ABS, NK, LR   |
| Vibration        | IEC 60068-2-6   |
| Shock            | IEC 60068-2-27  |
| Freefall         | IEC 60068-2-32  |
| Railway          | EN 50121-4  |
| Traffic Control  | NEMA TS2  |
| Power Substation | IEC 61850-3, IEEE 1613 Class 1  |

#### MTBF

|           |  |
|-----------|--|
| Time      | EDS-4008-LV/-LV-T models: 1,121,399 hrs<br>EDS-4008-HV/-HV-T models: 513,575 hrs<br>EDS-4008-2MSC-LV/-LV-T models: 1,014,299 hrs<br>EDS-4008-2MSC-HV/-HV-T models: 492,582 hrs<br>EDS-4008-2MST-LV/-LV-T models: 1,015,718 hrs<br>EDS-4008-2MST-HV/-HV-T models: 492,582 hrs<br>EDS-4008-2SSC-LV/-LV-T models: 1,015,718 hrs<br>EDS-4008-2SSC-HV/-HV-T models: 492,582 hrs<br>EDS-4008-2GT-2GS-LV/-LV-T models: 1,074,099 hrs<br>EDS-4008-2GT-2GS-HV/-HV-T models: 505,936 hrs<br>EDS-4008-4P-2GT-2GS-LVA/-LVA-T models: 923,670 hrs<br>EDS-4008-4P-2GT-2GS-LVB/-LVB-T models: 870,865 hrs hrs |
| Standards | Telcordia SR332  |

#### Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


#### Package Contents

|               |   |
|---------------|---|
| Device        | 1 x EDS-4008 Series switch  |
| Documentation | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

# Dimensions


## EDS-4008(-T), EDS-4008-2MSC(-T), EDS-4008-2SSC(-T) Models

Unit: mm (inch)

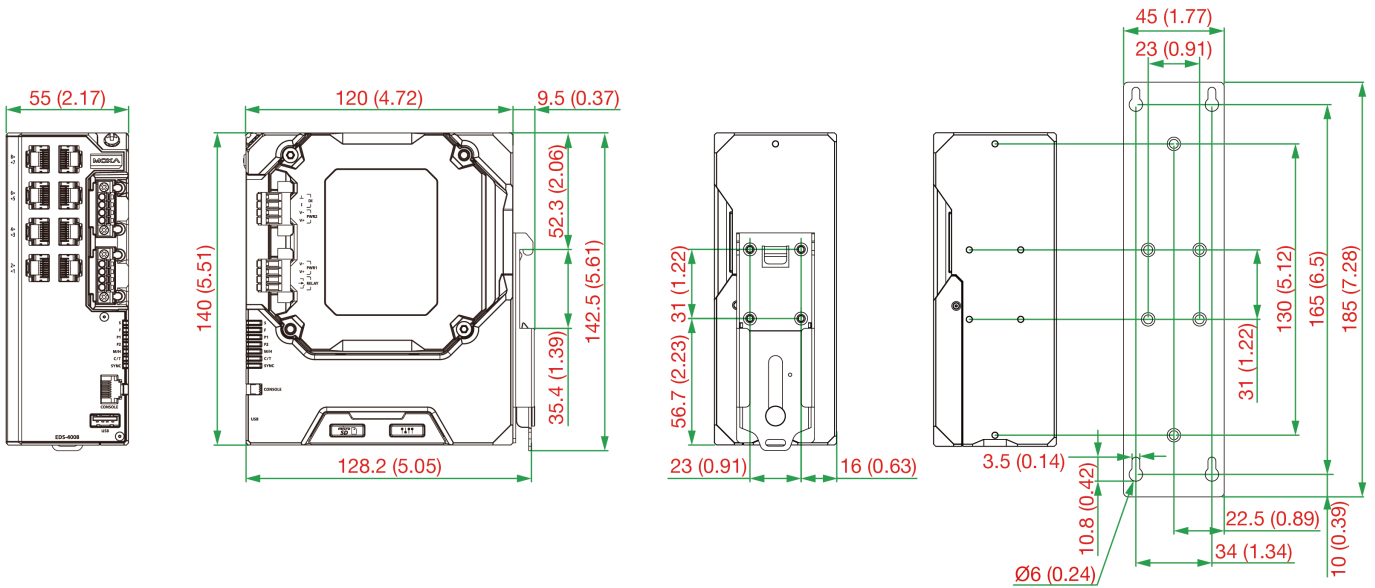


## EDS-4008-2MST(-T) Models

Unit: mm (inch)

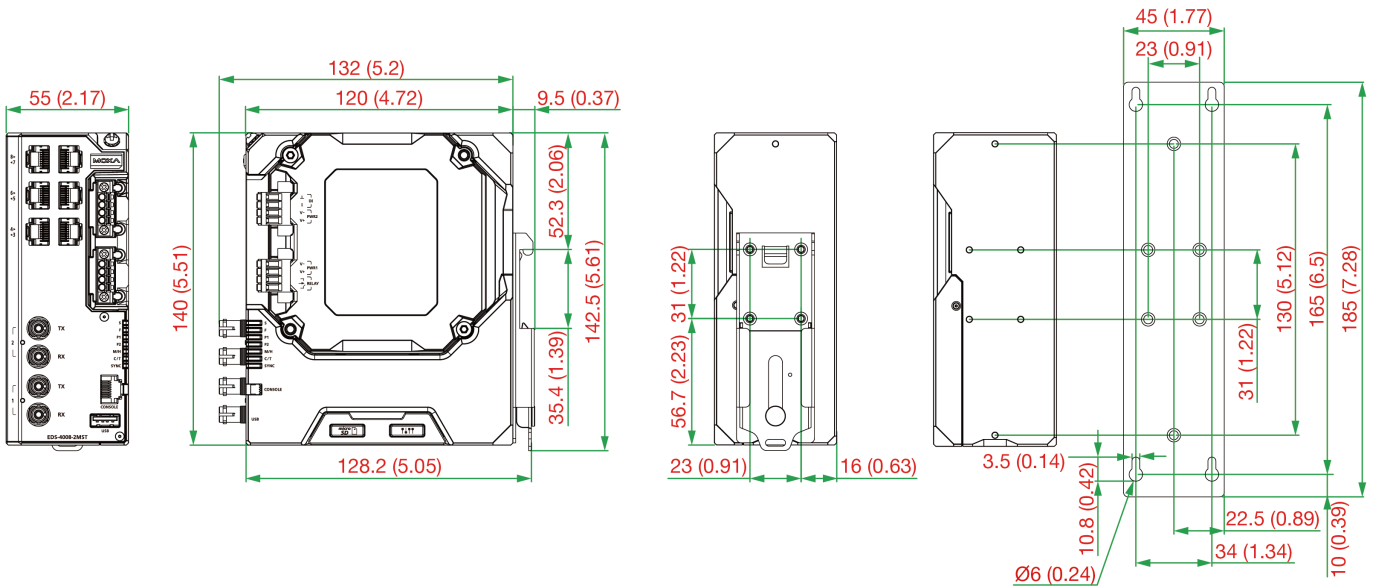

## EDS-4008-2GT-2GS(-T), EDS-4008-4P-2GT-2GS(-T) Models

Unit: mm (inch)

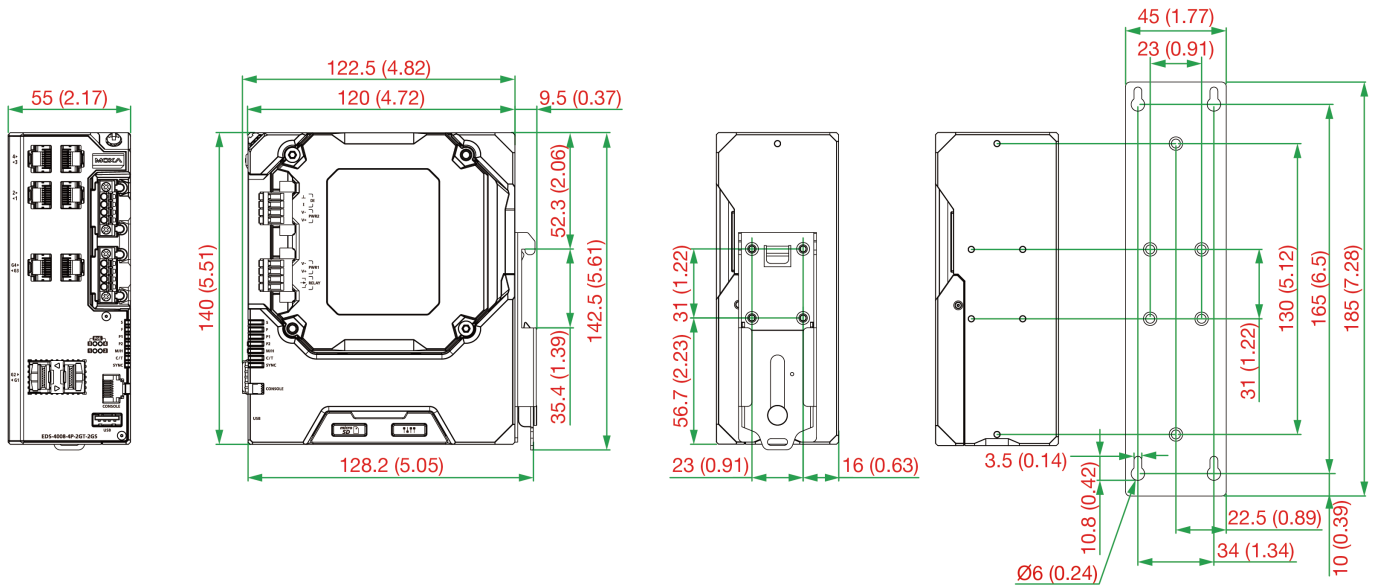

## Ordering Information

| Model Name         | 10/100 BaseT(X) Ports (RJ45 Connector) | 100 BaseFX Ports (Multi-mode SC Connector) | 100 BaseFX Ports (Multi-mode ST Connector) | 100 BaseFX Ports (Single-mode SC Connector) | PoE 10/100 BaseT(X) Ports (RJ45 Connector) | 10/100/1000 BaseT(X) Ports (RJ45 Connector) | 100/1000 BaseSFP Slots | Operating Voltage            | Pre-installed Power Module | Operating Temp. |
|--------------------|--|--|--|---|--|---|------------------------|------------------------------|----------------------------|-----------------|
| EDS-4008-LV        | 8                                      | -  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-LV-T      | 8                                      | -  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-HV        | 8                                      | -  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-HV-T      | 8                                      | -  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-2MSC-LV   | 6                                      | 2  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2MSC-LV-T | 6                                      | 2  | -  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2MSC-HV   | 6                                      | 2  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2MSC-HV-T | 6                                      | 2  | -  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-2MST-LV   | 6                                      | -  | 2  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2MST-LV-T | 6                                      | -  | 2  | -   | -  | -   | -                      | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2MST-HV   | 6                                      | -  | 2  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2MST-HV-T | 6                                      | -  | 2  | -   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |

| Model Name                | 10/100 BaseT(X) Ports (RJ45 Connector) | 100 BaseFX Ports (Multi-mode SC Connector) | 100 BaseFX Ports (Multi-mode ST Connector) | 100 BaseFX Ports (Single-mode SC Connector) | PoE 10/100 BaseT(X) Ports (RJ45 Connector) | 10/100/1000 BaseT(X) Ports (RJ45 Connector) | 100/1000 BaseSFP Slots | Operating Voltage                                   | Pre-installed Power Module | Operating Temp. |
|---------------------------|--|--|--|---|--|---|------------------------|---|----------------------------|-----------------|
| EDS-4008-2SSC-LV          | 6                                      | -  | -  | 2   | -  | -   | -                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2SSC-LV-T        | 6                                      | -  | -  | 2   | -  | -   | -                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2SSC-HV          | 6                                      | -  | -  | 2   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2SSC-HV-T        | 6                                      | -  | -  | 2   | -  | -   | -                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-2GT-2GS-LV       | 4                                      | -  | -  | -   | -  | 2   | 2                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -10 to 60°C     |
| EDS-4008-2GT-2GS-LV-T     | 4                                      | -  | -  | -   | -  | 2   | 2                      | 9.6 to 60 VDC                                       | PWR-100-LV                 | -40 to 75°C     |
| EDS-4008-2GT-2GS-HV       | 4                                      | -  | -  | -   | -  | 2   | 2                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4008-2GT-2GS-HV-T     | 4                                      | -  | -  | -   | -  | 2   | 2                      | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4008-4P-2GT-2GS-LVA   | -                                      | -  | -  | -   | 4  | 2   | 2                      | 44 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-101-LV-BP-I            | -10 to 60°C     |
| EDS-4008-4P-2GT-2GS-LVA-T | -                                      | -  | -  | -   | 4  | 2   | 2                      | 44 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-101-LV-BP-I            | -40 to 75°C     |
| EDS-4008-4P-2GT-2GS-LVB   | -                                      | -  | -  | -   | 4  | 2   | 2                      | 12 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-103-LV-VB-I            | -10 to 60°C     |
| EDS-4008-4P-2GT-2GS-LVB-T | -                                      | -  | -  | -   | 4  | 2   | 2                      | 12 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-103-LV-VB-I            | -40 to 75°C     |

## Accessories (sold separately)

### SFP Modules

|                |  |
|----------------|--|
| SFP-1GEZXL     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXL-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHL      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |

|               |  |
|---------------|--|
| SFP-1GLHXLC   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXLC    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T  | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXLC-T  | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC-T  | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXLC-T  | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |

## Power Supplies

|           |   |
|-----------|---|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
|-----------|---|

|            |  |
|------------|--|
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.



# EDS-4009 Series

## 9-port managed Ethernet switches



### Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)<sup>1</sup>, and RSTP/STP for network redundancy
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-4009 Series is a range of 9-port managed Fast Ethernet switches with the option for three 100M ST/SC fiber-optic ports.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-4009 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone.

The EDS-4009 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100BaseT(X) Ports (RJ45 connector)      | 6<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-4009-3MSC-LV/-HV/-T models: 3   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-4009-3MST-LV/-HV/-T models: 3   |
| 100BaseFX Ports (single-mode SC connector) | EDS-4009-3SSC-LV/-HV/-T models: 3   |

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

|           |   |
|-----------|---|
| Standards | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for authentication |
|-----------|---|

|               |   |                         |                                |       |              |
|---------------|---|-------------------------|--------------------------------|-------|--------------|
| Optical Fiber | 100BaseFX   |                         |                                |       |              |
|               | Multi-Mode  |                         | Single-Mode                    |       |              |
|               | Fiber Cable Type  | OM1                     | 50/125 $\mu$ m<br>800 MHz x km | G.652 |              |
|               | Typical Distance  |                         | 4 km                           | 5 km  | 40 km        |
|               | Wavelength  | Typical (nm)            | 1300                           |       | 1310         |
|               |   | TX Range (nm)           | 1260 to 1360                   |       | 1280 to 1340 |
|               |   | RX Range (nm)           | 1100 to 1600                   |       | 1100 to 1600 |
|               | Optical Power   | TX Range (dBm)          | -10 to -20                     |       | 0 to -5      |
|               |   | RX Range (dBm)          | -3 to -32                      |       | -3 to -34    |
|               |   | Link Budget (dB)        | 12                             |       | 29           |
|               |   | Dispersion Penalty (dB) | 3                              |       | 1            |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |                                |       |              |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

### Switch Properties

|                   |               |
|-------------------|---------------|
| MAC Table Size    | 16 K          |
| Jumbo Frame Size  | 9.216 KB      |
| Max. No. of VLANs | 256           |
| VLAN ID Range     | VID 1 to 4094 |

|                                 |  |
|---------------------------------|--|
| IGMP Groups                     | 512  |
| Priority Queues                 | 4  |
| Packet Buffer Size              | 1 MB   |
| <b>LED Interface</b>            |  |
| LED Indicators                  | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC   |
| <b>Serial Interface</b>         |  |
| Console Port                    | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)   |
| <b>USB Interface</b>            |  |
| USB Connector                   | USB Type A (Reserved)  |
| <b>Input/Output Interface</b>   |  |
| Alarm Contact Channels          | 1, Relay output with current carrying capacity of 1 A @ 24 VDC   |
| Digital Input Channels          | 1  |
| Digital Inputs                  | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA  |
| Buttons                         | Reset button   |
| <b>DIP Switch Configuration</b> |  |
| DIP Switches                    | Turbo Ring, Master, Coupler, Reserve   |
| <b>Power Parameters</b>         |  |
| Connection                      | 2 removable 4-contact terminal block(s)  |
| Pre-installed Power Module      | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I   |
| Note                            | The EDS-4009 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-4009-T + PWR-100-LV = EDS-4009-LV-T<br>EDS-4009-T + PWR-105-HV-I = EDS-4009-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-4009-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-4009-HV-T. |
| Input Voltage                   | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input   |
| Operating Voltage               | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC  |
| Input Current                   | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A   |
| Power Consumption (Max.)        | EDS-4009-3MSC-LV(-T) models: 9.51 W<br>EDS-4009-3MSC-HV(-T) models: 12.14 W<br>EDS-4009-3MST-LV(-T) models: 9.51 W<br>EDS-4009-3MST-HV(-T) models: 12.17 W<br>EDS-4009-3SSC-LV(-T) models: 9.51 W<br>EDS-4009-3SSC-HV(-T) models: 12.34 W  |
| Overload Current Protection     | Supported  |
| Reverse Polarity Protection     | Supported  |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | EDS-4009-3MSC(-T)/EDS-4009-3SSC(-T) models:<br>55 x 140 x 120 mm (2.17 x 5.51 x 4.72 in)<br>EDS-4009-3MST(-T) models:<br>55 x 140 x 132 mm (2.17 x 5.51 x 5.20 in) |
| Weight       | EDS-4009-3MSC(-T) models: 821.5 g (1.81 lb)<br>EDS-4009-3MST(-T) models: 920 g (2.03 lb)<br>EDS-4009-3SSC(-T) models: 932 g (2.05 lb)                              |
| Installation | DIN-rail mounting, Wall mounting (with optional kit)   |
| Housing      | Metal  |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                          |   |
|--------------------------|---|
| Industrial Cybersecurity | IEC 62443-4-1<br>IEC 62443-4-2  |
| Safety                   | UL 61010-2-201, EN 62368-1 (LVD)  |
| EMC                      | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                      | CISPR 32, FCC Part 15B Class A  |
| EMS                      | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                 | -LV/-LV-T models: DNV, ABS, NK, LR  |
| Vibration                | IEC 60068-2-6   |
| Shock                    | IEC 60068-2-27  |
| Freefall                 | IEC 60068-2-32  |
| Railway                  | EN 50121-4  |
| Traffic Control          | NEMA TS2  |
| Power Substation         | IEC 61850-3, IEEE 1613 Class 1  |

## MTBF

|      |  |
|------|--|
| Time | EDS-4009-3MSC-LV/-LV-T models: 972,841 hrs<br>EDS-4009-3MSC-HV/-HV-T models: 482,263 hrs<br>EDS-4009-3MST-LV/-LV-T models: 972,841 hrs<br>EDS-4009-3MST-HV/-HV-T models: 482,263 hrs<br>EDS-4009-3SSC-LV/-LV-T models: 972,841 hrs<br>EDS-4009-3SSC-HV/-HV-T models: 482,263 hrs |
|------|--|

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x EDS-4009 Series switch  |
| Documentation | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

## Dimensions


### EDS-4009-3MSC(-T), EDS-4009-3SSC(-T) Models

Unit: mm (inch)

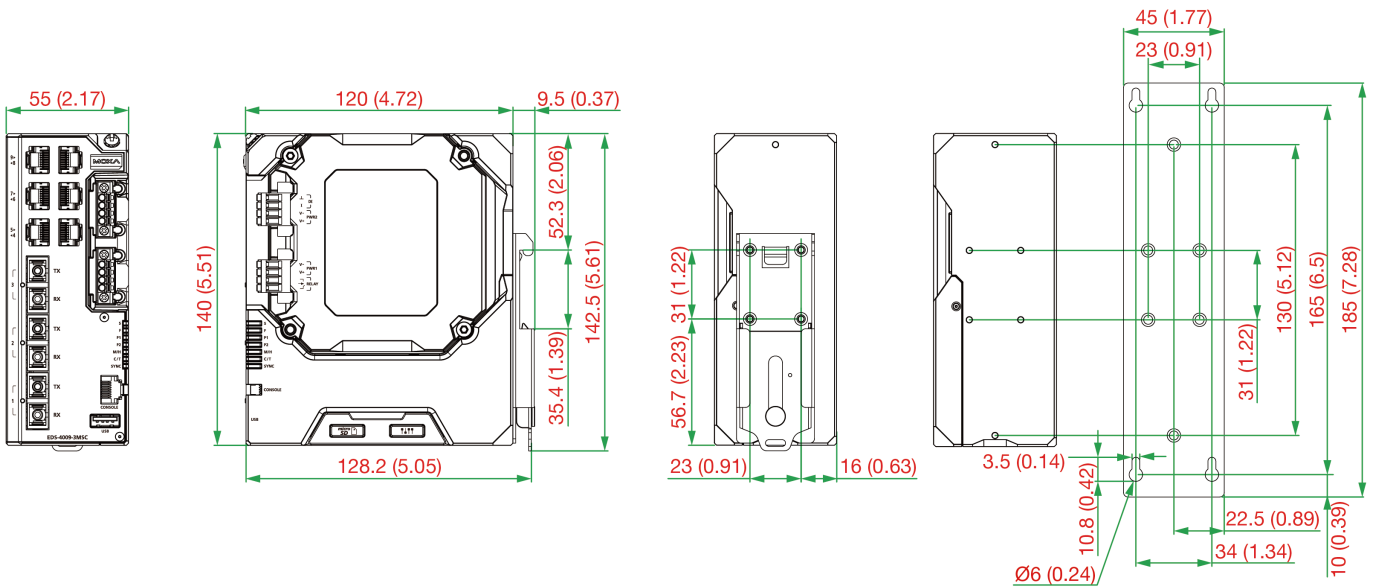

### EDS-4009-3MST(-T) Models

Unit: mm (inch)

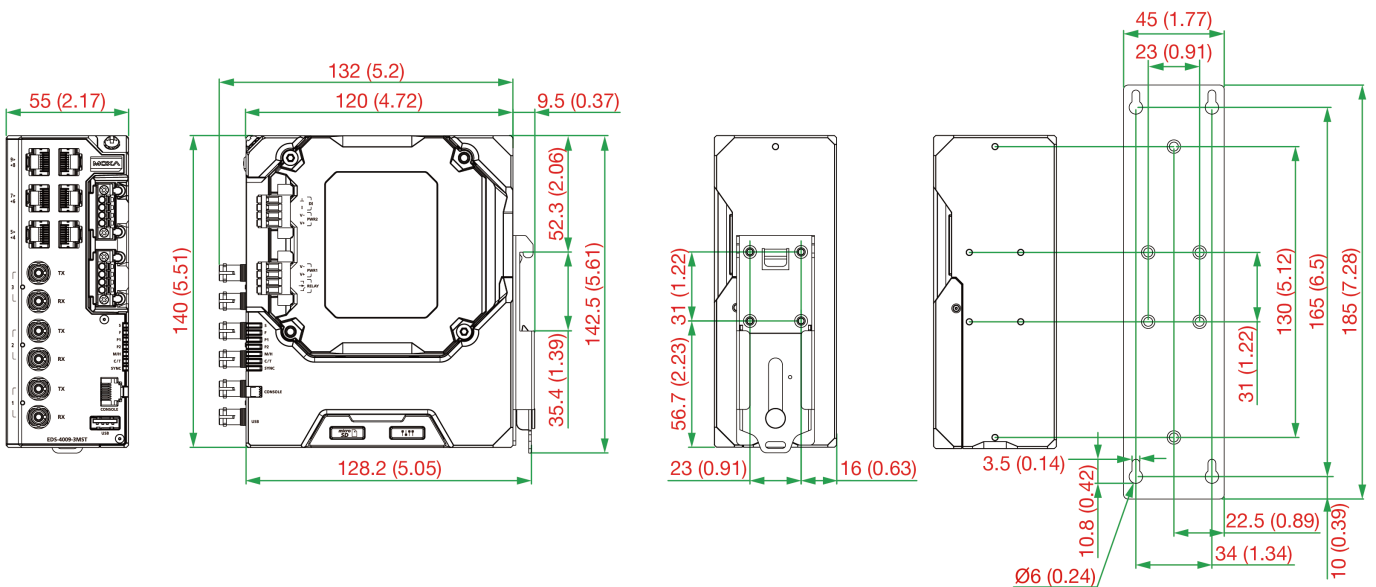

## Ordering Information

| Model Name         | 10/100BaseT(X) Ports (RJ45 Connector) | 100BaseFX Ports (Multi-mode SC Connector) | 100BaseFX Ports (Multi-mode ST Connector) | 100BaseFX Ports (Single-mode SC Connector) | Operating Voltage            | Pre-installed Power Module | Operating Temp. |
|--------------------|---------------------------------------|---|---|--|------------------------------|----------------------------|-----------------|
| EDS-4009-3MSC-LV   | 6                                     | 3   | –   | –  | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4009-3MSC-LV-T | 6                                     | 3   | –   | –  | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4009-3MSC-HV   | 6                                     | 3   | –   | –  | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4009-3MSC-HV-T | 6                                     | 3   | –   | –  | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4009-3MST-LV   | 6                                     | –   | 3   | –  | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4009-3MST-LV-T | 6                                     | –   | 3   | –  | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4009-3MST-HV   | 6                                     | –   | 3   | –  | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4009-3MST-HV-T | 6                                     | –   | 3   | –  | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4009-3SSC-LV   | 6                                     | –   | –   | 3  | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-4009-3SSC-LV-T | 6                                     | –   | –   | 3  | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-4009-3SSC-HV   | 6                                     | –   | –   | 3  | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4009-3SSC-HV-T | 6                                     | –   | –   | 3  | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |

## Accessories (sold separately)

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-4012 Series

8+4G-port (with 8 802.3bt PoE port option) managed Ethernet switches



## Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Support for IEEE 802.3bt PoE for up to 90 W output per port
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)<sup>1</sup>, and RSTP/STP for network redundancy
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

## Certifications



## Introduction

The EDS-4012 Series is a range of 12-port managed Fast Ethernet switches with the option for four 1 Gbps fiber-optic uplink ports. This Series also offers models with four 10/100BaseT(X) 802.3af (PoE), 802.3at (PoE+), and 802.3bt-compliant Ethernet PoE port options to connect high-bandwidth PoE devices.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-4012 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone.

The EDS-4012 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-4012-4GS-LV/-HV/-T models: 8<br>EDS-4012-4GC-LV/-HV/-T models: 8<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| PoE Ports (10/100BaseT(X), RJ45 connector) | EDS-4012-8P-4GS-LVA/-LVB/-T models: 8  |
| 100/1000BaseSFP Ports                      | EDS-4012-4GS-LV/-HV/-T models: 4<br>EDS-4012-8P-4GS-LVA/-VB/-T models: 4   |

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

|  |   |
|--|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | EDS-4012-4GC-LV/-HV/-T models: 4  |
| Standards  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseX<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for authentication |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Jumbo Frame Size   | 9.216 KB      |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 512           |
| Priority Queues    | 4             |
| Packet Buffer Size | 1 MB          |

### LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC |
|----------------|--|

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

### Input/Output Interface

|                        |  |
|------------------------|--|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC |
| Digital Input Channels | 1  |



|                                 |   |
|---------------------------------|---|
| Digital Inputs                  | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA   |
| Buttons                         | Reset button  |
| <b>DIP Switch Configuration</b> |   |
| DIP Switches                    | Turbo Ring, Master, Coupler, Reserve  |
| <b>Power Parameters</b>         |   |
| Connection                      | 2 removable 4-contact terminal block(s)   |
| Pre-installed Power Module      | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I<br>-LVA/-LVA-T models: PWR-101-LV-BP-I<br>-LVB/-LVB-T models: PWR-103-LV-VB-I  |
| Note                            | The EDS-4012 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-4012-4GS-T + PWR-100-LV = EDS-4012-4GS-LV-T<br>EDS-4012-4GS-T + PWR-105-HV-I = EDS-4012-4GS-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-4012-4GS-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-4012-4GS-HV-T.  |
| Input Voltage                   | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input<br>-LVA/-LVA-T models: 48 VDC, Redundant dual inputs<br>-LVB/-LVB-T models: 12/24/48 VDC, Redundant dual inputs  |
| Operating Voltage               | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC<br>-LVA/-LVA-T models: 44 to 57 VDC (>52 VDC for PoE+ output recommended)<br>-LVB/-LVB-T models: 12 to 57 VDC (>52 VDC for PoE+ output recommended)   |
| Input Current                   | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A<br>-LVA/-LVA-T models: 48 VDC, 5.42 A<br>-LVB/-LVB-T models: 12/48 VDC, 7.46/4.27 A or 24 VDC, 7.26 A  |
| Power Consumption (Max.)        | EDS-4012-4GS-LV/-T models: 10.52 W<br>EDS-4012-4GS-HV/-T models: 12.22 W<br>EDS-4012-4GC-LV/-T models: 10.7 W<br>EDS-4012-4GC-HV/-T models: 13.35 W<br><br>EDS-4012-8P-4GS-LVA/-T models:<br>Without PoE: 13.34 W<br>With PoE: Max. 240 W for total PD power consumption @ 48 VDC input<br><br>EDS-4012-8P-4GS-LVB/-T models:<br>Without PoE: 15.32 W<br>With PoE:<br>Max. 180 W for total PD power consumption @ 48 VDC input<br>Max. 150 W for total PD power consumption @ 24 VDC input (Max. 120 W for -T model)<br>Max. 62 W for total PD consumption @ 12 VDC input |
| Max. PoE Power Output per Port  | 90 W  |
| Overload Current Protection     | Supported   |
| Reverse Polarity Protection     | Supported   |
| <b>Physical Characteristics</b> |   |
| IP Rating                       | IP40  |
| Dimensions                      | 55 x 140 x 120 mm (2.17 x 5.51 x 4.72 in)   |


|  |  |
|--|--|
| Weight                                 | 827 g (1.82 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)   |
| Housing                                | Metal  |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Industrial Cybersecurity               | IEC 62443-4-1<br>IEC 62443-4-2   |
| Safety                                 | UL 61010-2-201, EN 62368-1 (LVD)   |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4   |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF                        |
| Maritime                               | -LV/-LV-T, PoE/PoE-T models: DNV, ABS, NK, LR  |
| Vibration                              | IEC 60068-2-6  |
| Shock                                  | IEC 60068-2-27   |
| Freefall                               | IEC 60068-2-32   |
| Railway                                | EN 50121-4   |
| Traffic Control                        | NEMA TS2   |
| Power Substation                       | IEC 61850-3, IEEE 1613 Class 1   |
| <b>MTBF</b>                            |  |
| Time                                   | EDS-4012-4GC-LV/-T models: 1,036,336 hrs<br>EDS-4012-4GC-HV/-T models: 497,392 hrs<br>EDS-4012-4GS-LV/-T models: 874,838 hrs<br>EDS-4012-4GS-HV/-T models: 456,870 hrs<br>EDS-4012-8P-4GS-LVA/-T models: 799,780 hrs<br>EDS-4012-8P-4GS-LVB/-T models: 759,924 hrs |
| Standards                              | Telcordia SR332  |
| <b>Warranty</b>                        |  |
| Warranty Period                        | 5 years  |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |

## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x EDS-4012 Series switch  |
| Documentation | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

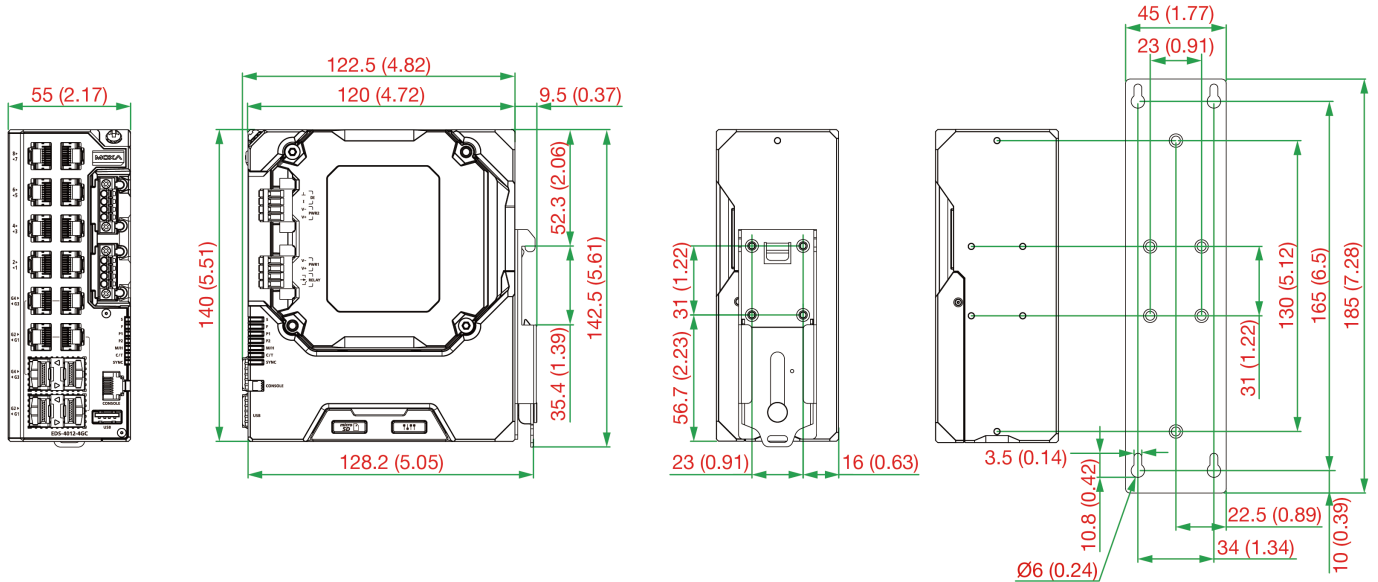

## Ordering Information

| Model Name            | 10/100BaseT(X) Ports (RJ45 Connector) | PoE 10/100BaseT(X) Ports (RJ45 Connector) | 100/1000BaseSFP Slots | Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | Operating Voltage                                   | Pre-installed Power Module | Operating Temp. |
|-----------------------|---------------------------------------|---|-----------------------|--|---|----------------------------|-----------------|
| EDS-4012-4GS-LV       | 8                                     | -   | 4                     | -  | 9.6 to 60 VDC                                       | PWR-100-LV                 | -10 to 60°C     |
| EDS-4012-4GS-LV-T     | 8                                     | -   | 4                     | -  | 9.6 to 60 VDC                                       | PWR-100-LV                 | -40 to 75°C     |
| EDS-4012-4GS-HV       | 8                                     | -   | 4                     | -  | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4012-4GS-HV-T     | 8                                     | -   | 4                     | -  | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4012-4GC-LV       | 8                                     | -   | -                     | 4  | 9.6 to 60 VDC                                       | PWR-100-LV                 | -10 to 60°C     |
| EDS-4012-4GC-LV-T     | 8                                     | -   | -                     | 4  | 9.6 to 60 VDC                                       | PWR-100-LV                 | -40 to 75°C     |
| EDS-4012-4GC-HV       | 8                                     | -   | -                     | 4  | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -10 to 60°C     |
| EDS-4012-4GC-HV-T     | 8                                     | -   | -                     | 4  | 88 to 300 VDC, 85 to 264 VAC                        | PWR-105-HV-I               | -40 to 75°C     |
| EDS-4012-8P-4GS-LVA   | -                                     | 8   | 4                     | -  | 44 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-101-LV-BP-I            | -10 to 60°C     |
| EDS-4012-8P-4GS-LVA-T | -                                     | 8   | 4                     | -  | 44 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-101-LV-BP-I            | -40 to 75°C     |

| Model Name            | 10/100BaseT(X) Ports (RJ45 Connector) | PoE 10/100BaseT(X) Ports (RJ45 Connector) | 100/1000BaseSFP Slots | Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | Operating Voltage                                   | Pre-installed Power Module | Operating Temp. |
|-----------------------|---------------------------------------|---|-----------------------|--|---|----------------------------|-----------------|
| EDS-4012-8P-4GS-LVB   | -                                     | 8   | 4                     | -  | 12 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-103-LV-VB-I            | -10 to 60°C     |
| EDS-4012-8P-4GS-LVB-T | -                                     | 8   | 4                     | -  | 12 to 57 VDC (> 52 VDC for PoE+ output recommended) | PWR-103-LV-VB-I            | -40 to 75°C     |

## Accessories (sold separately)

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature                                       |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature                                      |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                     |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                    |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |

|               |  |
|---------------|--|
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-4014 Series

## 8+4G+2 2.5GbE-port managed Ethernet switches



### Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Increased bandwidth capabilities with fiber SFP slots supporting up to 2.5 Gbps
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)<sup>1</sup>, and RSTP/STP for network redundancy
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-4014 Series is a range of 14-port managed Fast Ethernet switches with four 1 Gbps and two 2.5 Gbps fiber-optic ports.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-4014 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone.

The EDS-4014 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|                                       |   |
|---------------------------------------|---|
| 10/100BaseT(X) Ports (RJ45 connector) | 8<br>Auto MDI/MDI-X connection<br>Auto negotiation speed<br>Full/Half duplex mode   |
| 100/1000BaseSFP Slots                 | 4   |
| 1000/2500BaseSFP Ports                | 2   |
| Standards                             | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseX<br>IEEE 802.3bz for 2.5GBaseX<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for authentication |

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Jumbo Frame Size   | 9.216 KB      |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 512           |
| Priority Queues    | 4             |
| Packet Buffer Size | 1 MB          |

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC |
|----------------|--|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Buttons                | Reset button  |

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

## Power Parameters

|                             |  |
|-----------------------------|--|
| Connection                  | 2 removable 4-contact terminal block(s)  |
| Pre-installed Power Module  | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I   |
| Note                        | The EDS-4014 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-4014-4GS-2QGS-T + PWR-100-LV = EDS-4014-4GS-2QGS-LV-T<br>EDS-4014-4GS-2QGS-T + PWR-105-HV-I = EDS-4014-4GS-2QGS-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-4014-4GS-2QGS-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-4014-4GS-2QGS-HV-T. |
| Input Voltage               | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input   |
| Operating Voltage           | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC  |
| Input Current               | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A   |
| Power Consumption (Max.)    | EDS-4014-4GS-2QGS-LV(-T) models: 12.15 W<br>EDS-4014-4GS-2QGS-HV(-T) models: 14.44 W   |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | 55 x 140 x 122.5 mm (2.17 x 5.51 x 4.82 in)          |
| Weight       | 846 g (1.87 lb)                                      |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |
| Housing      | Metal  |

## Environmental Limits

|                       |   |
|-----------------------|---|
| Operating Temperature | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
|-----------------------|---|

## Standards and Certifications

|                          |   |
|--------------------------|---|
| Industrial Cybersecurity | IEC 62443-4-1<br>IEC 62443-4-2  |
| Safety                   | UL 61010-2-201, EN 62368-1 (LVD)  |
| EMC                      | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                      | CISPR 32, FCC Part 15B Class A  |
| EMS                      | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                 | -LV/-LV-T models: DNV, ABS, NK, LR  |







|                 |  |
|-----------------|--|
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-2.5GSLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature                            |
| SFP-2.5GLSLC-T  | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature                           |
| SFP-2.5GMLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature             |
| SFP-2.5GSLHLC-T | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature                           |

#### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-G508E Series

## 8G-port full Gigabit managed Ethernet switches



### Features and Benefits

- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The EDS-G508E switches are equipped with 8 Gigabit Ethernet ports, making them ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. Gigabit transmission increases bandwidth for higher performance and transfers large amounts of triple-play services across a network quickly.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, RSTP/STP, and MSTP increase the reliability of your system and improve the availability of your network backbone. The EDS-G508E Series is designed especially for demanding communication applications, such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone construction.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1x, MAC ACL, HTTPS, SSH, and sticky MAC address to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

## Ethernet Interface

|  |   |
|--|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 8<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection   |
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, Port-based VLAN, GVRP, IGMP v1/v2/v3, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, MAB authentication, Sticky MAC, NTP authentication, MAC ACL, Port Lock, RADIUS, SSH, SMTP with TLS   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 4 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), 1000M (TP port), MSTR/HEAD, CPLR/TAIL |
|----------------|--|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 4-contact terminal block(s) |
| Input Current               | 0.28 A @ 24 VDC                         |
| Input Voltage               | 12/24/48/-48 VDC, Redundant dual inputs |
| Operating Voltage           | 9.6 to 60 VDC                           |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 79.2 x 135 x 137 mm (3.1 x 5.3 x 5.4 in)             |
| Weight       | 1440 g (3.18 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-G508E: -10 to 60°C (14 to 140°F)<br>EDS-G508E-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |   |
|---------------------|---|
| Safety              | UL 508  |
| EMC                 | EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A  |
| EMS                 | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2  |
| Maritime            | DNV-GL, LR, ABS, NK   |
| Power Substation    | IEC 61850-3, IEEE 1613  |
| Railway             | EN 50121-4  |
| Traffic Control     | NEMA TS2  |
| Shock               | IEC 60068-2-27  |
| Freefall            | IEC 60068-2-32  |
| Vibration           | IEC 60068-2-6   |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 808,970 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-G508E Series switch   |
| Cable            | 1 x USB type A male to USB type B male  |
| Installation Kit | 4 x cap, plastic, for RJ45 port   |
| Documentation    | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |

## Dimensions

Unit: mm (inch)

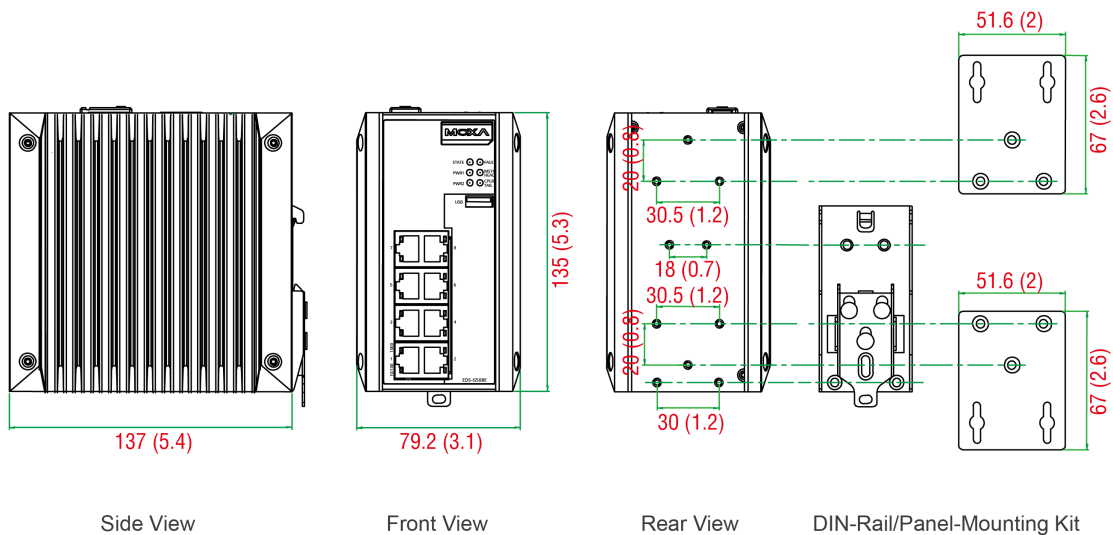

## Ordering Information

| Model Name  | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | Operating Temp. |
|-------------|---|-----------------|
| EDS-G508E   | 8   | -10 to 60°C     |
| EDS-G508E-T | 8   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

## Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

## Wall-Mounting Kits

|          |   |
|----------|---|
| WK-51-01 | Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm |
|----------|---|

## Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

## Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.



# EDS-G509 Series

## 9G-port full Gigabit managed Ethernet switches



### Features and Benefits

- 4 10/100/1000BaseT(X) ports plus 5 combo (10/100/1000BaseT(X) or 100/1000BaseSFP slot) Gigabit ports
- Enhanced surge protection for serial, LAN, and power
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-G509 Series is equipped with 9 Gigabit Ethernet ports and up to 5 fiber-optic ports, making it ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. Gigabit transmission increases bandwidth for higher performance and transfers large amounts of video, voice, and data across a network quickly.

Redundant Ethernet technologies Turbo Ring, Turbo Chain, RSTP/STP, and MSTP increase system reliability and the availability of your network backbone. The EDS-G509 Series is designed especially for communication demanding applications, such as video and process monitoring, shipbuilding, ITS, and DCS systems, all of which can benefit from a scalable backbone construction.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- IGMP snooping and GMRP for filtering multicast traffic
- Compatible with the ABC-01 (Automatic Backup Configurator) for system configuration backup
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 2, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 2   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

## Ethernet Interface

|   |  |
|---|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | 4<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 5  |
| Standards   | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseX |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, GMRP, GVRP, IGMP v1/v2, Port-based VLAN   |
| Industrial Protocols | EtherNet/IP, Modbus TCP  |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, Port Lock, RADIUS, SSH, TACACS+, SNMPv3   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, FAULT, 10/100/1000M (TP port), 100/1000M (SFP port), MSTR/HEAD, CPLR/TAIL |
|----------------|---|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Power Connector             | 2 removable 6-contact terminal block(s) |
| Input Current               | 0.69 A @ 24 VDC                         |
| Input Voltage               | 12/24/48 VDC, Redundant dual inputs     |
| Operating Voltage           | 9.6 to 60 VDC                           |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 87.1 x 135 x 107 mm (3.43 x 5.31 x 4.21 in)          |
| Weight       | 1510 g (3.33 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-G509: 0 to 60°C (32 to 140°F)<br>EDS-G509-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|           |  |
|-----------|--|
| Freefall  | IEC 60068-2-32   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime  | ABS, DNV-GL, LR, NK  |
| Railway   | EN 50121-4   |
| Safety    | EN 60950-1, UL 508   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 598,659 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-G509 Series switch  |
| Cable            | 1 x RJ45-to-DB9 console cable   |
| Installation Kit | 4 x cap, plastic, for RJ45 port<br>5 x cap, plastic, for SFP port   |
| Documentation    | 1 x document and software CD<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note             | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

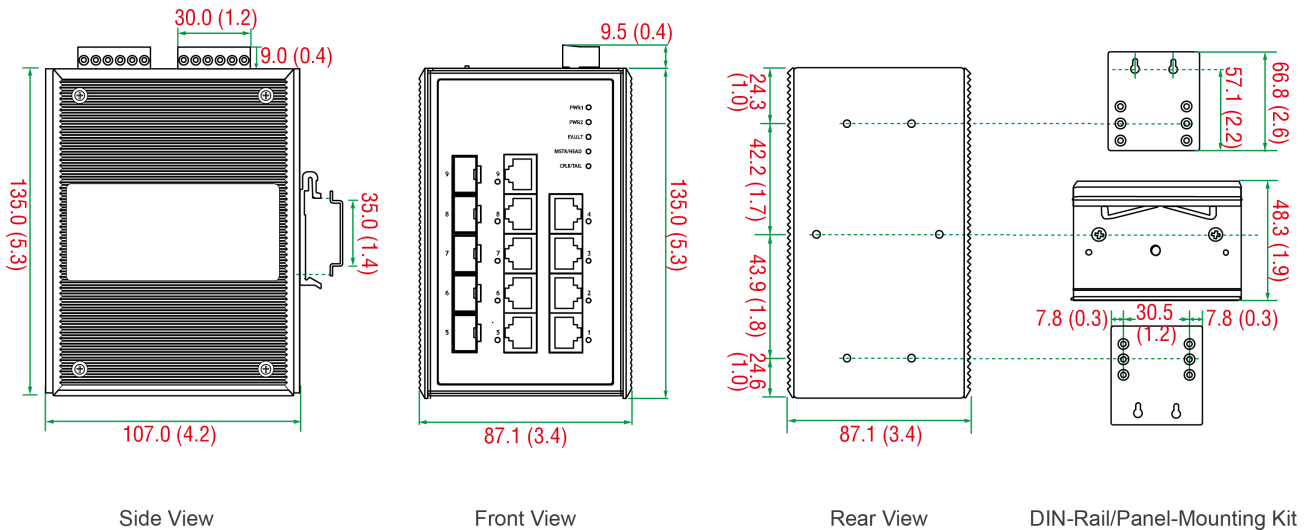

## Ordering Information

| Model Name | Layer | Total No. of Ports | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | Combo Ports<br>10/100/1000BaseT(X)<br>or 100/1000BaseSFP | Operating Temp. |
|------------|-------|--------------------|---|--|-----------------|
| EDS-G509   | 2     | 9                  | 4   | 5  | 0 to 60°C       |
| EDS-G509-T | 2     | 9                  | 4   | 5  | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
|--------------|---|

|                 |  |
|-----------------|--|
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC      | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T    | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXC       | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXC-T     | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, -40 to 85°C operating temperature   |
| SFP-1GSXC       | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature                                       |
| SFP-1GSXC-T     | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                     |
| SFP-1GZXC       | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, 0 to 60°C operating temperature   |
| SFP-1GZXC-T     | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, -40 to 85°C operating temperature   |

## Wall-Mounting Kits

|       |   |
|-------|---|
| WK-46 | Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm |
|-------|---|

## Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-G512E Series

12G-port (with 8 PoE+ ports option) full Gigabit managed Ethernet switches



## Features and Benefits

- 8 IEEE 802.3af and IEEE 802.3at PoE+ standard ports
- 36-watt output per PoE+ port in high-power mode
- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

The EDS-G512E Series is equipped with 12 Gigabit Ethernet ports and up to 4 fiber-optic ports, making it ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. It also comes with 8 10/100/1000BaseT(X), 802.3af (PoE), and 802.3at (PoE+)-compliant Ethernet port options to connect high-bandwidth PoE devices. Gigabit transmission increases bandwidth for higher performance and transfers large amounts of triple-play services across a network quickly.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, RSTP/STP, and MSTP increase the reliability of your system and improve the availability of your network backbone. The EDS-G512E Series is designed specifically for communication demanding applications, such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone construction.

## Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- Advanced PoE management function (PoE port setting, PD failure check, and PoE scheduling)
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade
- Port mirroring for online debugging
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC address to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Automatic warning by exception through email and relay output

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

## Ethernet Interface

|   |   |
|---|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector)      | EDS-G512E-4GSFP: 8<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector) | EDS-G512E-8PoE-4GSFP: 8   |
| 100/1000BaseSFP Slots                           | 4   |
| Standards                                       | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, Port-based VLAN, GVRP, IGMP v1/v2/v3, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, MAB authentication, Sticky MAC, NTP authentication, MAC ACL, Port Lock, RADIUS, SSH, SMTP with TLS   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 4 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), 1000M (TP port), 100/1000M (SFP port), MSTR/HEAD, CPLR/TAIL, smart PoE LED (EDS-G512E-8PoE-4GSFP Series only) |
|----------------|--|



| Serial Interface                       |   |
|--|---|
| Console Port                           | USB-serial console (Type B connector)   |
| DIP Switch Configuration               |   |
| DIP Switches                           | Turbo Ring, Master, Coupler, Reserve  |
| Power Parameters                       |   |
| Connection                             | 2 removable 4-contact terminal block(s)   |
| Input Current                          | EDS-G512E-4GSFP Series: 0.34 A @ 24 VDC<br>EDS-G512E-8PoE-4GSFP Series: 5.30 A @ 48 VDC   |
| Input Voltage                          | Redundant dual inputs:<br>EDS-G512E-4GSFP Series: 12/24/48/-48 VDC<br>EDS-G512E-8PoE-4GSFP Series: 48 VDC, Redundant dual inputs  |
| Operating Voltage                      | EDS-G512E-4GSFP Series: 9.6 to 60 VDC<br>EDS-G512E-8PoE-4GSFP Series: 44 to 57 VDC (> 50 VDC for PoE+ output recommended)   |
| Overload Current Protection            | Supported   |
| Reverse Polarity Protection            | Supported   |
| Power Budget                           | EDS-G512E-8PoE-4GSFP: Max. 240 W for total PD consumption<br>EDS-G512E-8PoE-4GSFP: Max. 36 W for each PoE port  |
| Power Consumption (Max.)               | EDS-G512E-8PoE-4GSFP: Max. 14.36 W full loading without PDs' consumption<br>Note: When selecting a power supply, check the PD power consumption.  |
| Physical Characteristics               |   |
| Housing                                | Metal   |
| IP Rating                              | IP30  |
| Dimensions                             | 79.2 x 135 x 137 mm (3.1 x 5.3 x 5.4 in)  |
| Weight                                 | EDS-G512E-4GSFP: 1,440 g (3.18 lb)<br>EDS-G512E-8PoE-4GSFP: 1,540 g (3.40 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| Environmental Limits                   |   |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| Standards and Certifications           |   |
| Safety                                 | EDS-G512E-4GSFP/EDS-G512E-8PoE-4GSFP Series: UL 508<br>EDS-G512E-8PoE-4GSFP Series: EN 60950-1 (LVD)  |
| EMC                                    | EN 61000-6-2/-6-4   |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |

|                     |   |
|---------------------|---|
| Hazardous Locations | EDS-G512E-4GSFP Series: ATEX, Class I Division 2  |
| Maritime            | EDS-G512E-4GSFP: DNV-GL, EDS-G512E-4GSFP: LR, EDS-G512E-4GSFP: ABS, EDS-G512E-4GSFP: NK |
| Power Substation    | IEC 61850-3, IEEE 1613  |
| Railway             | EN 50121-4  |
| Traffic Control     | EDS-G512E-4GSFP: NEMA TS2   |
| Shock               | IEC 60068-2-27  |
| Freefall            | IEC 60068-2-32  |
| Vibration           | IEC 60068-2-6   |

#### MTBF

|           |   |
|-----------|---|
| Time      | EDS-G512E-4GSFP Series: 816,823 hrs<br>EDS-G512E-8PoE-4GSFP Series: 361,368 hrs |
| Standards | Telcordia (Bellcore), GB  |

#### Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

#### Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-G512E Series switch   |
| Cable            | 1 x USB type A male to USB type B male  |
| Installation Kit | 4 x cap, plastic, for RJ45 port   |
| Documentation    | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note             | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

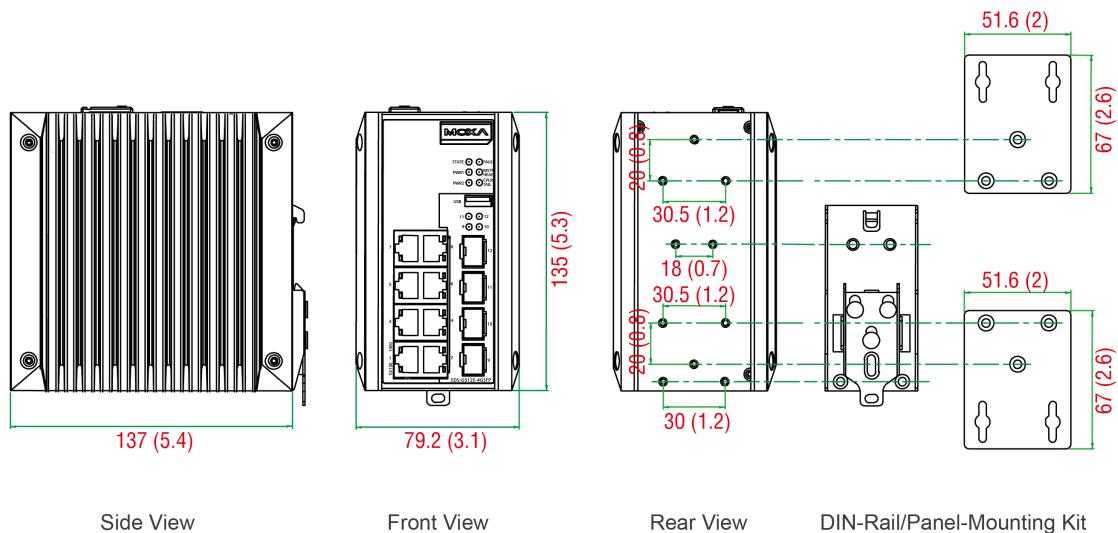

## Ordering Information

| Model Name             | 10/100/1000BaseT(X) Ports, RJ45 Connector | PoE Ports, 10/100/1000BaseT(X), RJ45 Connector | IEEE 802.3af/at for PoE/PoE+ Output | 100/1000Base SFP Slots | Operating Temp. |
|------------------------|---|--|-------------------------------------|------------------------|-----------------|
| EDS-G512E-4GSFP        | 8   | –  | –                                   | 4                      | -10 to 60°C     |
| EDS-G512E-4GSFP-T      | 8   | –  | –                                   | 4                      | -40 to 75°C     |
| EDS-G512E-8PoE-4GSFP   | –   | 8  | ✓                                   | 4                      | -10 to 60°C     |
| EDS-G512E-8PoE-4GSFP-T | –   | 8  | ✓                                   | 4                      | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |

|                |   |
|----------------|---|
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXLC-T  | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC    | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature      |
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-51-01 | Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm |
|----------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-G516E Series

## 16G-port full Gigabit managed Ethernet switches



### Features and Benefits

- Up to 12 10/100/1000BaseT(X) ports and 4 100/1000BaseSFP ports
- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



### Introduction

The EDS-G516E Series is equipped with 16 Gigabit Ethernet ports and up to 4 fiber-optic ports, making it ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. Gigabit transmission increases bandwidth for higher performance and transfers large amounts of triple-play services across a network quickly.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, RSTP/STP, and MSTP increase the reliability of your system and improve the availability of your network backbone. The EDS-G500E Series is designed specifically for communication demanding applications, such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable network backbone.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1x, MAC ACL, HTTPS, SSH, and sticky MAC address to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output

### Specifications

#### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

## Ethernet Interface

|  |   |
|--|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 12<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| 100/1000BaseSFP Slots                      | 4   |
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3x for flow control<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1X for authentication<br>IEEE 802.3ad for Port Trunk with LACP |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, Port-based VLAN, GVRP, IGMP v1/v2/v3, GMRP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET IO Device (Slave)  |
| Management           | LLDP, Back Pressure Flow Control, BOOTP, Port Mirror, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Ethernet-like MIB, MIB-II, Bridge MIB, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, SNMPv3, MAB authentication, Sticky MAC, NTP authentication, MAC ACL, Port Lock, RADIUS, SSH, SMTP with TLS   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 4 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), 1000M (TP port), 100/1000M (SFP port), MSTR/HEAD, CPLR/TAIL |
|----------------|--|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 4-contact terminal block(s) |
| Input Current               | 0.39 A @ 24 VDC                         |
| Input Voltage               | 12/24/48/-48 VDC, Redundant dual inputs |
| Operating Voltage           | 9.6 to 60 VDC                           |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 79.2 x 135 x 137 mm (3.1 x 5.3 x 5.4 in)             |
| Weight       | 1440 g (3.18 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-G516E-4GSFP: -10 to 60°C (14 to 140°F)<br>EDS-G516E-4GSFP-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                     |   |
|---------------------|---|
| Safety              | UL 508  |
| EMC                 | EN 61000-6-2/-6-4   |
| EMI                 | CISPR 32, FCC Part 15B Class A  |
| EMS                 | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX, Class I Division 2  |
| Maritime            | DNV-GL, LR, ABS, NK   |
| Power Substation    | IEC 61850-3, IEEE 1613  |
| Railway             | EN 50121-4  |
| Traffic Control     | NEMA TS2  |
| Shock               | IEC 60068-2-27  |
| Freefall            | IEC 60068-2-32  |
| Vibration           | IEC 60068-2-6   |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 805,491 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x EDS-G516E Series switch  |
| Cable            | 1 x USB type A male to USB type B male   |
| Installation Kit | 4 x cap, plastic, for RJ45 port<br>4 x cap, plastic, for SFP slot  |
| Documentation    | 1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |
| Note             | SFP modules need to be purchased separately for use with this product.   |

## Dimensions

Unit: mm (inch)

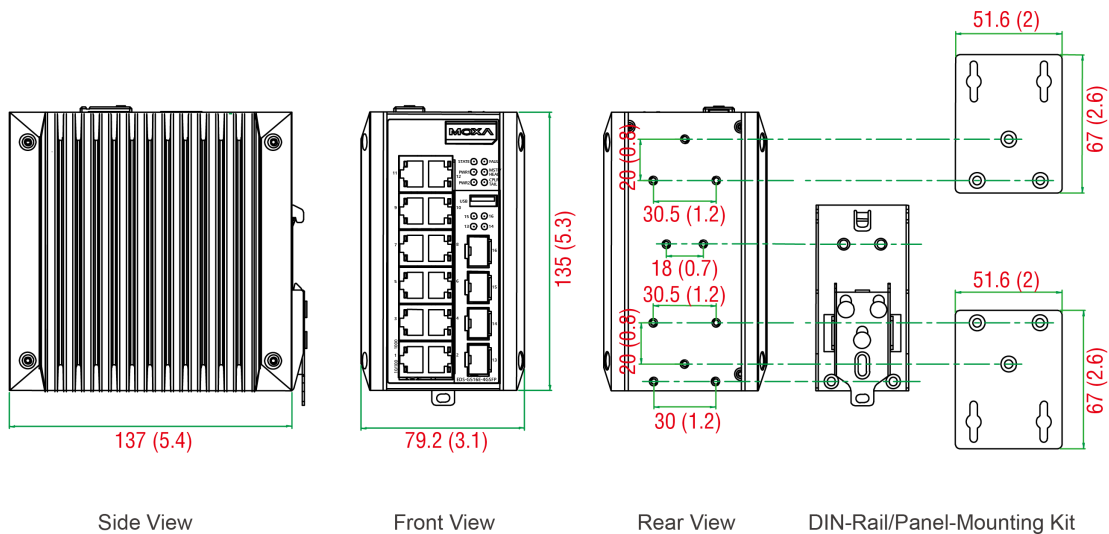

## Ordering Information

| Model Name        | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | 100/1000BaseSFP Slots | Operating Temp. |
|-------------------|---|-----------------------|-----------------|
| EDS-G516E-4GSFP   | 12  | 4                     | -10 to 60°C     |
| EDS-G516E-4GSFP-T | 12  | 4                     | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|            |   |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|



|              |   |
|--------------|---|
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |
|--------------|---|

## SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXL      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXL-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXL      | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXL-T    | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXL       | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXL-T     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXL       | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |

|                |   |
|----------------|---|
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-51-01 | Wall-mounting kit, 2 plates, 6 screws, 51.6 x 67 x 2 mm |
|----------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-G4008 Series

## 8G-port full Gigabit managed Ethernet switches



### Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), and RSTP/STP for network redundancy
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

### Certifications



## Introduction

The EDS-G4008 Series is equipped with 8 Gigabit Ethernet ports, making it ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. Gigabit transmission speed increases bandwidth for higher performance and transfers large amounts of triple-play services across a network quickly.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-G4008 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone construction.

The EDS-G4008 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 8<br>Auto MDI/MDI-X connection<br>Auto negotiation speed<br>Full/Half duplex mode  |
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for authentication |

### Ethernet Software Features

|            |  |
|------------|--|
| Filter     | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB        | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |

|                      |   |
|----------------------|---|
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation   |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy        |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication   |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Jumbo Frame Size   | 9.216 KB      |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 512           |
| Priority Queues    | 4             |
| Packet Buffer Size | 1 MB          |

#### LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC |
|----------------|--|

#### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

#### USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

#### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Buttons                | Reset button  |

#### DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|

#### Power Parameters

|                            |  |
|----------------------------|--|
| Connection                 | 2 removable 4-contact terminal block(s)  |
| Pre-installed Power Module | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I   |
| Note                       | The EDS-G4008 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-G4008-T + PWR-100-LV = EDS-G4008-LV-T<br>EDS-G4008-T + PWR-105-HV-I = EDS-G4008-HV-T |

|                             |   |
|-----------------------------|---|
|                             | If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-G4008-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-G4008-HV-T. |
| Input Voltage               | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input  |
| Operating Voltage           | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC   |
| Input Current               | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A  |
| Overload Current Protection | Supported   |
| Reverse Polarity Protection | Supported   |
| Power Consumption (Max.)    | EDS-G4008-LV(-T) models: 8.84 W<br>EDS-G4008-HV(-T) models: 10.73 W   |

### Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | 55 x 140 x 120 mm (2.17 x 5.51 x 4.72 in)            |
| Weight       | 859.5 g (1.89 lb)                                    |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |
| Housing      | Metal  |

### Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | Standard models: -10 to 60°C (14 to 140°F)<br>Wide temp. models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |


### Standards and Certifications

|                          |   |
|--------------------------|---|
| Industrial Cybersecurity | IEC 62443-4-1<br>IEC 62443-4-2  |
| Safety                   | UL 61010-2-201, EN 62368-1 (LVD)  |
| EMC                      | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                      | CISPR 32, FCC Part 15B Class A  |
| EMS                      | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                 | -LV/-LV-T models: DNV, ABS, NK, LR  |
| Vibration                | IEC 60068-2-6   |
| Shock                    | IEC 60068-2-27  |
| Freefall                 | IEC 60068-2-32  |
| Railway                  | EN 50121-4  |

|                         |   |
|-------------------------|---|
| Traffic Control         | NEMA TS2  |
| Power Substation        | IEC 61850-3, IEEE 1613 Class 1  |
| <b>MTBF</b>             |   |
| Time                    | EDS-G4008-LV/-LV-T models: 1,098,085 hrs<br>EDS-G4008-HV/-HV-T models: 511,204 hrs  |
| Standards               | Telcordia SR332   |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-G4008 Series switch   |
| Documentation           | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

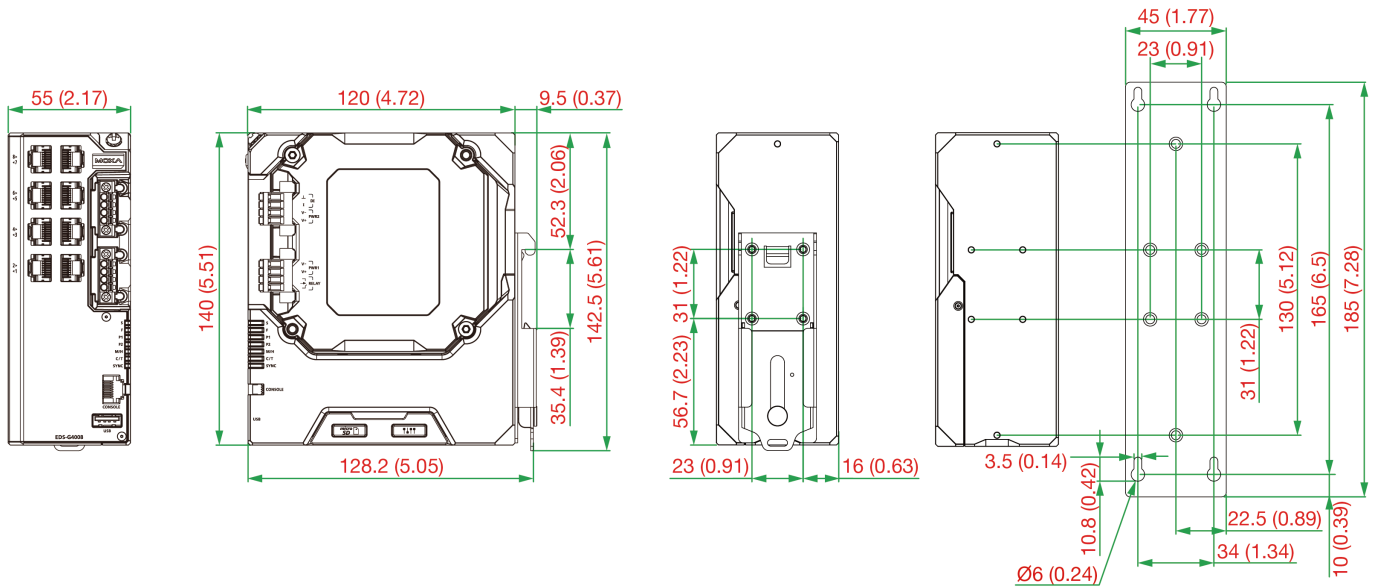

## Ordering Information

| Model Name     | 10/100/1000BaseT(X) Ports, RJ45 Connector | Operating Voltage            | Pre-installed Power Module | Operating Temp. |
|----------------|---|------------------------------|----------------------------|-----------------|
| EDS-G4008-LV   | 8   | 9.6 to 60 VDC                | PWR-100-LV                 | -10 to 60°C     |
| EDS-G4008-LV-T | 8   | 9.6 to 60 VDC                | PWR-100-LV                 | -40 to 75°C     |
| EDS-G4008-HV   | 8   | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -10 to 60°C     |
| EDS-G4008-HV-T | 8   | 88 to 300 VDC, 85 to 264 VAC | PWR-105-HV-I               | -40 to 75°C     |

## Accessories (sold separately)

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-G4012 Series

12G-port (with 8 802.3bt PoE port option) full Gigabit managed Ethernet switches



## Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Support for IEEE 802.3bt PoE for up to 90 W output per port
- Increased bandwidth capabilities with fiber SFP slots supporting up to 2.5 Gbps
- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), and RSTP/STP for network redundancy
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management

## Certifications



## Introduction

The EDS-G4012 Series is equipped with 12 Gigabit Ethernet ports and up to four 1 Gbps or 2.5 Gbps fiber-optic ports, making it ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. Gigabit transmission speed increases bandwidth for higher performance and transfers large amounts of triple-play services across a network quickly. This Series also comes with eight 10/100/1000BaseT(X) 802.3af (PoE), 802.3at (PoE+), and 802.3bt-compliant Ethernet port options to connect high-bandwidth PoE devices.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-G4012 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone construction.

The EDS-G4012 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector)           | EDS-G4012-4GC-HV/-LV/-T models: 8<br>Auto MDI/MDI-X connection<br>Auto negotiation speed<br>Full/Half duplex mode |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | EDS-G4012-4GC-LV/-HV/-T models: 4   |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector)      | EDS-G4012-8P-4QGS-LVA/-LVB/-T models: 8   |



|                        |   |
|------------------------|---|
| 1000/2500BaseSFP Ports | EDS-G4012-8P-4QGS-LVA/-LVB/-T models: 4   |
| Standards              | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseX<br>IEEE 802.3bz for 2.5GBaseX<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for authentication |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Jumbo Frame Size   | 9.216 KB      |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 512           |
| Priority Queues    | 4             |
| Packet Buffer Size | 1 MB          |

### LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC |
|----------------|--|

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

### Input/Output Interface

|                        |  |
|------------------------|--|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC |
| Digital Input Channels | 1  |

|                                 |   |
|---------------------------------|---|
| Digital Inputs                  | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA   |
| Buttons                         | Reset button  |
| <b>DIP Switch Configuration</b> |   |
| DIP Switches                    | Turbo Ring, Master, Coupler, Reserve  |
| <b>Power Parameters</b>         |   |
| Connection                      | 2 removable 4-contact terminal block(s)   |
| Pre-installed Power Module      | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I<br>-LVA/-LVA-T models: PWR-101-LV-BP-I<br>-LVB/-LVB-T models: PWR-103-LV-VB-I  |
| Note                            | The EDS-G4012 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-G4012-4GC-T + PWR-100-LV = EDS-G4012-4GC-LV-T<br>EDS-G4012-4GC-T + PWR-105-HV-I = EDS-G4012-4GC-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-G4012-4GC-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-G4012-4GC-HV-T. |
| Input Voltage                   | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input<br>-LVA/-LVA-T models: 48 VDC, Redundant dual inputs<br>-LVB/-LVB-T models: 12/24/48 VDC, Redundant dual inputs  |
| Operating Voltage               | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC<br>-LVA/-LVA-T models: 44 to 57 VDC (>52 VDC for PoE+ output recommended)<br>-LVB/-LVB-T models: 12 to 57 VDC (>52 VDC for PoE+ output recommended)   |
| Input Current                   | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A<br>-LVA/-LVA-T models: 48 VDC, 5.42 A<br>-LVB/-LVB-T models: 12/48 VDC, 7.46/4.27 A or 24 VDC, 7.26 A  |
| Power Consumption (Max.)        | EDS-G4012-4GC-LV(-T) models: 12.68 W<br>EDS-G4012-4GC-HV(-T) models: 15.8 W<br><br>EDS-G4012-8P-4QGS-LVA(-T) models:<br>Without PoE: 15.58 W<br>With PoE: Max. 240 W for total PD power consumption @ 48 VDC input<br><br>EDS-G4012-8P-4QGS-LVB(-T) models:<br>Without PoE: 17.96 W<br>With PoE:<br>Max. 180 W for total PD power consumption @ 48 VDC input;<br>Max. 150 W for total PD power consumption @ 24 VDC input;<br>Max. 62 W for total PD power consumption @ 12 VDC input   |
| Max. PoE Power Output per Port  | 90 W  |
| Overload Current Protection     | Supported   |
| Reverse Polarity Protection     | Supported   |
| <b>Physical Characteristics</b> |   |
| IP Rating                       | IP40  |
| Dimensions                      | 55 x 140 x 122.5 mm (2.17 x 5.51 x 4.82 in)   |


|  |   |
|--|---|
| Weight                                 | EDS-G4012-4GC(-T) models: 881.5 g (1.94 lb)<br>EDS-G4012-8P-4QGS(-T) models: 972 g (2.14 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| Housing                                | Metal   |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Industrial Cybersecurity               | IEC 62443-4-1<br>IEC 62443-4-2  |
| Safety                                 | UL 61010-2-201, EN 62368-1 (LVD)  |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime                               | -LV/-LV-T, PoE/PoE-T models: DNV, ABS, NK, LR   |
| Vibration                              | IEC 60068-2-6   |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-32  |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Power Substation                       | IEC 61850-3, IEEE 1613 Class 1  |
| <b>MTBF</b>                            |   |
| Time                                   | EDS-G4012-4GC-HV/HV-T: 456,870 hrs<br>EDS-G4012-4GC-LV/LV-T: 867,981 hrs<br>EDS-G4012-8P-4QGS-LVA/LVA-T: 799,780 hrs<br>EDS-G4012-8P-4QGS-LVB/LVB-T: 759,924 hrs  |
| Standards                              | Telcordia SR332   |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |

## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x EDS-G4012 Series switch   |
| Documentation | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

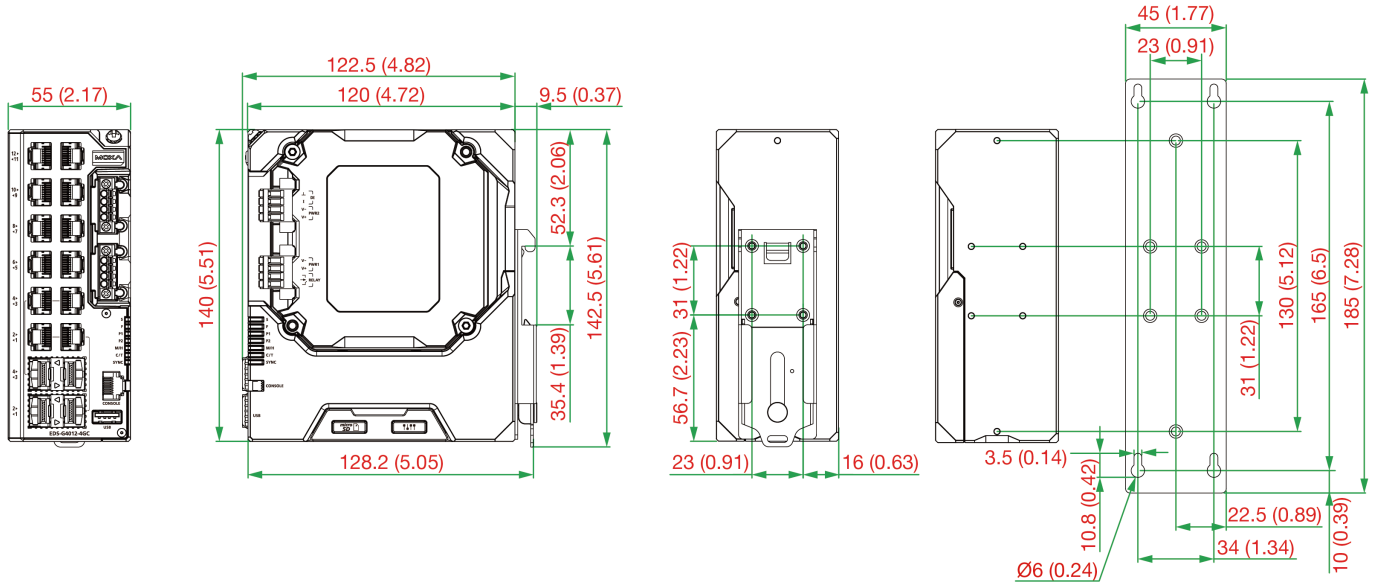

## Ordering Information

| Model Name              | 10/100/1000BaseT(X) Ports, RJ45 Connector | Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | PoE 10/100/1000BaseT(X) Ports, RJ45 Connector | 100/1000/2500BaseSFP Ports | Operating Voltage                                  | Pre-installed Power Module | Operating Temp. |
|-------------------------|---|--|---|----------------------------|--|----------------------------|-----------------|
| EDS-G4012-4GC-LV        | 8   | 4  | -   | -                          | 9.6 to 60 VDC                                      | PWR-100-LV                 | -10 to 60°C     |
| EDS-G4012-4GC-LV-T      | 8   | 4  | -   | -                          | 9.6 to 60 VDC                                      | PWR-100-LV                 | -40 to 85°C     |
| EDS-G4012-4GC-HV        | 8   | 4  | -   | -                          | 88 to 300 VDC, 85 to 264 VAC                       | PWR-105-HV-I               | -10 to 60°C     |
| EDS-G4012-4GC-HV-T      | 8   | 4  | -   | -                          | 88 to 300 VDC, 85 to 264 VAC                       | PWR-105-HV-I               | -40 to 85°C     |
| EDS-G4012-8P-4QGS-LVA   | -   | -  | 8   | 4                          | 44 to 57 VDC (> 52 VDC for PoE+ input recommended) | PWR-101-LV-BP-I            | -10 to 60°C     |
| EDS-G4012-8P-4QGS-LVA-T | -   | -  | 8   | 4                          | 44 to 57 VDC (> 52 VDC for PoE+ input recommended) | PWR-101-LV-BP-I            | -40 to 85°C     |
| EDS-G4012-8P-4QGS-LVB   | -   | -  | 8   | 4                          | 12 to 57 VDC (> 52 VDC for PoE+ input recommended) | PWR-103-LV-VB-I            | -10 to 60°C     |
| EDS-G4012-8P-4QGS-LVB-T | -   | -  | 8   | 4                          | 12 to 57 VDC (> 52 VDC for PoE+ input recommended) | PWR-103-LV-VB-I            | -40 to 85°C     |

## Accessories (sold separately)

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHXL      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXL      | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXL       | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GSXL       | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXL-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXL-T    | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXL-T     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXL-T     | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                          |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature                              |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                          |
| SFP-2.5GSLHLC-T | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature               |
| SFP-2.5GSLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature                |
| SFP-2.5GMLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature |
| SFP-2.5GLSLC-T  | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature               |

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-G4014 Series

## 8G+6 2.5GbE-port full Gigabit managed Ethernet switches



### Features and Benefits

- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards
- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), and RSTP/STP for network redundancy
- Wide range of power input options for flexible deployment
- Compact and flexible housing design to fit into confined spaces
- Supports MXstudio for easy, visualized industrial network management
- Increased bandwidth capabilities with fiber SFP slots supporting up to 2.5 Gbps

### Certifications



## Introduction

The EDS-G4014 Series is equipped with eight Gigabit Ethernet ports and six 2.5 Gbps fiber-optic ports, making it ideal for upgrading an existing network to Gigabit speed or building a new full Gigabit backbone. Gigabit transmission speed increases bandwidth for higher performance and can transfer large amounts of triple-play services across a network quickly.

Redundant Ethernet technologies such as Turbo Ring, Turbo Chain, and RSTP/STP increase the reliability of your system and improve the availability of your network backbone. The EDS-G4014 Series is designed specifically for demanding applications such as video and process monitoring, ITS, and DCS systems, all of which can benefit from a scalable backbone.

The EDS-G4014 Series is compliant with the IEC 62443-4-2 and IEC 62443-4-1 Industrial Cybersecurity certifications, which cover both product security and secure development life-cycle requirements, helping our customers meet the compliance requirements of secure industrial network design.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 8<br>Auto MDI/MDI-X connection<br>Auto negotiation speed<br>Full/Half duplex mode   |
| 100/1000/2500BaseSFP Ports                 | 4   |
| 1000/2500BaseSFP Ports                     | 2   |
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseX<br>IEEE 802.3bz for 2.5GBaseX<br>IEEE 802.3x for flow control<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1X for authentication |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Jumbo Frame Size   | 9.216 KB      |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 512           |
| Priority Queues    | 4             |
| Packet Buffer Size | 1 MB          |

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, STATE, FAULT, MSTR/HEAD, CPLR/TAIL, SYNC |
|----------------|--|

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| Buttons                | Reset button  |

## DIP Switch Configuration

|              |                                      |
|--------------|--------------------------------------|
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
|--------------|--------------------------------------|



## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 4-contact terminal block(s)   |
| Pre-installed Power Module  | -LV/-LV-T models: PWR-100-LV<br>-HV/-HV-T models: PWR-105-HV-I  |
| Note                        | The EDS-G4014 Series supports modular power supplies. The model names and power parameters are determined by the installed power module.<br><br>For example:<br>EDS-G4014-6QGS-T + PWR-100-LV = EDS-G4014-6QGS-LV-T<br>EDS-G4014-6QGS-T + PWR-105-HV-I = EDS-G4014-6QGS-HV-T<br><br>If you install a different power module, refer to the specifications of the corresponding model. For example, if you replace the power module of the EDS-G4014-6QGS-LV-T with the PWR-105-HV-I, refer to the specifications of the EDS-G4014-6QGS-HV-T. |
| Input Voltage               | -LV/-LV-T models: 12/24/48 VDC, Redundant dual inputs<br>-HV/-HV-T models: 110/220 VDC/VAC, Single input  |
| Operating Voltage           | -LV/-LV-T models: 9.6 to 60 VDC<br>-HV/-HV-T models: 88 to 300 VDC, 85 to 264 VAC   |
| Input Current               | -LV/-LV-T models: 12-48 VDC, 1.50-0.40 A or 24 VDC, 0.70 A<br>-HV/-HV-T models: 110-220 VAC, 50-60 Hz, 0.30-0.20 A or 110-220 VDC, 0.30-0.20 A  |
| Power Consumption (Max.)    | EDS-G4014-6QGS-LV(-T) models: 14.91 W<br>EDS-G4014-6QGS-HV(-T) models: 17.32 W  |
| Overload Current Protection | Supported   |
| Reverse Polarity Protection | Supported   |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | 55 x 140 x 122.5 mm (2.17 x 5.51 x 4.82 in)          |
| Weight       | 846 g (1.87 lb)                                      |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |
| Housing      | Metal  |

## Environmental Limits

|                           |   |
|---------------------------|---|
| Operating Temperature     | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing)   |

## Standards and Certifications

|                          |   |
|--------------------------|---|
| Industrial Cybersecurity | IEC 62443-4-1<br>IEC 62443-4-2  |
| Safety                   | UL 61010-2-201, EN 62368-1 (LVD)  |
| EMC                      | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                      | CISPR 32, FCC Part 15B Class A  |
| EMS                      | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |

|                  |                                    |
|------------------|------------------------------------|
| Maritime         | -LV/-LV-T models: DNV, ABS, NK, LR |
| Vibration        | IEC 60068-2-6                      |
| Shock            | IEC 60068-2-27                     |
| Freefall         | IEC 60068-2-32                     |
| Railway          | EN 50121-4                         |
| Traffic Control  | NEMA TS2                           |
| Power Substation | IEC 61850-3, IEEE 1613 Class 1     |

#### MTBF

|      |  |
|------|--|
| Time | EDS-G4014-6QGS-LV/LV-T models: 994,797 hrs<br>EDS-G4014-6QGS-HV/HV-T models: 487,613 hrs |
|------|--|

#### Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

#### Package Contents

|               |   |
|---------------|---|
| Device        | 1 x EDS-G4014 Series switch   |
| Documentation | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |

## Dimensions

Unit: mm (inch)

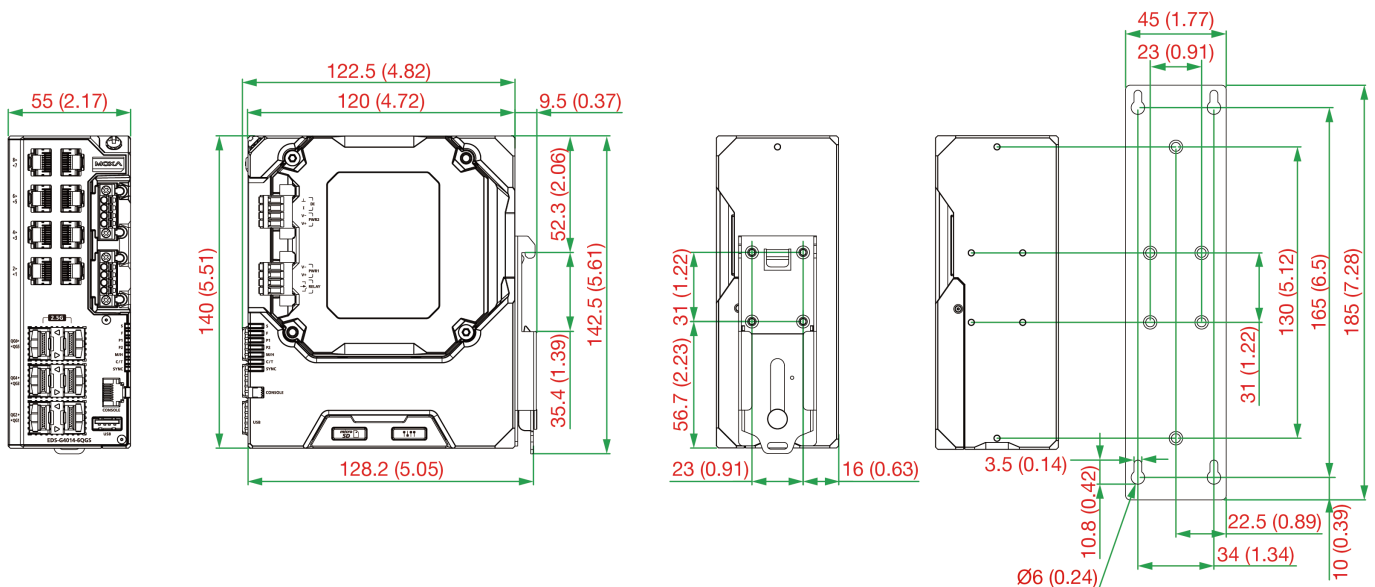

## Ordering Information

| Model Name          | 10/100/1000BaseT(X) Ports (RJ45 Connector) | 100/1000/2500BaseSFP Ports | 1000/2500BaseSFP Ports | Operating Voltage | Pre-installed Power Module | Operating Temp. |
|---------------------|--|----------------------------|------------------------|-------------------|----------------------------|-----------------|
| EDS-G4014-6QGS-LV   | 8  | 4                          | 2                      | 9.6 to 60 VDC     | PWR-100-LV                 | -10 to 60°C     |
| EDS-G4014-6QGS-LV-T | 8  | 4                          | 2                      | 9.6 to 60 VDC     | PWR-100-LV                 | -40 to 70°C     |

| Model Name          | 10/100/<br>1000BaseT(X)<br>Ports (RJ45<br>Connector) | 100/1000/<br>2500BaseSFP<br>Ports | 1000/<br>2500BaseSFP<br>Ports | Operating Voltage               | Pre-installed<br>Power Module | Operating Temp. |
|---------------------|--|-----------------------------------|-------------------------------|---------------------------------|-------------------------------|-----------------|
| EDS-G4014-6QGS-HV   | 8  | 4                                 | 2                             | 88 to 300 VDC, 85<br>to 264 VAC | PWR-105-HV-I                  | -10 to 60°C     |
| EDS-G4014-6QGS-HV-T | 8  | 4                                 | 2                             | 88 to 300 VDC, 85<br>to 264 VAC | PWR-105-HV-I                  | -40 to 70°C     |

## Accessories (sold separately)

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |

|                 |  |
|-----------------|--|
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-2.5GSLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 20 km transmission, -40 to 85 °C operating temperature                           |
| SFP-2.5GSLHLC-T | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 45 km transmission, -40 to 85 °C operating temperature                           |
| SFP-2.5GMLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, multi-mode, for 170, 200, 550, 600 m transmission, -40 to 85 °C operating temperature             |
| SFP-2.5GSLC-T   | SFP module with 1 2.5GBaseFX port with LC connector, single-mode, for 5 km transmission, -40 to 85 °C operating temperature                            |

#### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24  | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |
| MDR-60-24  | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                |

© Moxa Inc. All rights reserved. Updated Jun 17, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-P506E Series

4+2G-port Gigabit PoE+ managed Ethernet switches with 4 IEEE 802.3af/at PoE+ ports



## Features and Benefits

- Built-in 4 PoE+ ports support up to 60 W output per port
- Wide-range 12/24/48 VDC power inputs for flexible deployment
- Smart PoE functions for remote power device diagnosis and failure recovery
- 2 Gigabit combo ports for high-bandwidth communication
- Supports MXstudio for easy, visualized industrial network management

## Certifications



## Introduction

The EDS-P506E Series includes Gigabit managed PoE+ Ethernet switches that come standard with 4 10/100BaseT(X), 802.3af (PoE), and 802.3at (PoE+)-compliant Ethernet ports, and 2 combo Gigabit Ethernet ports. The EDS-P506E Series provides up to 30 watts of power per PoE+ port in standard mode and allows a high-power output of up to 4-pair 60 W for industrial heavy-duty PoE devices, such as weather-proof IP surveillance cameras with wipers/heaters, high-performance wireless access points, and rugged IP phones.

The EDS-P506E Series is highly versatile, and the SFP fiber ports can transmit data up to 120 km from the device to the control center with high EMI immunity. The Ethernet switches support a variety of management functions, including STP/RSTP, Turbo Ring, Turbo Chain, PoE power management, PoE device auto-checking, PoE power scheduling, PoE diagnostic, IGMP, VLAN, QoS, RMON, bandwidth management, and port mirroring. The EDS-P506E Series is designed especially for harsh outdoor applications with 4 kV surge protection to ensure uninterrupted reliability of PoE systems.

## Additional Features and Benefits

- Supports different PoE output settings (High-power 36 W and 60 W, Force and Legacy modes) to maximize powered device compatibility
- Supports Smart PoE functions (PoE diagnosis, PD failure check, PoE scheduling, and PoE Event Warning) to enhance PoE operational efficiency
- Command line interface (CLI) for quickly configuring major managed functions
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- Supports V-ON™ to ensure millisecond-level Layer2/Layer3 network recovery
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- Automatic warning by exception through email and relay output
- Port mirroring for online debugging
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1x, MAC ACL, HTTPS, SSH, and sticky MAC address to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- Fiber Check™ provides a comprehensive fiber Digital Diagnostic Monitoring (DDM) function and event warning on SFP fiber ports
- Bandwidth management to prevent unpredictable network status
- ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade

1. Gigabit Ethernet recovery time < 50 ms

## Specifications

### Ethernet Interface

|   |   |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 2<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection<br>Auto negotiation speed   |
| PoE Ports (10/100BaseT(X), RJ45 connector)            | 4<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection<br>Auto negotiation speed   |
| Standards   | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q VLAN, GMRP, GVRP, IGMP v1/v2/v3, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET  |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, MAC ACL, TACACS+, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH  |
| Time Management      | IEEE 1588v2 PTP (software-based), NTP Server/Client, SNTP  |

### Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 4096          |
| Packet Buffer Size | 12 Mbits      |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

### LED Interface

|                |   |
|----------------|---|
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), 10/100/1000M (Gigabit Combo port), MSTR/HEAD, CPLR/TAIL, PoE |
|----------------|---|

|  |   |
|--|---|
| <b>Serial Interface</b>                |   |
| Console Port                           | USB-serial console (Type B connector)   |
| <b>Input/Output Interface</b>          |   |
| Digital Input Channels                 | 1   |
| Digital Inputs                         | Max. input current: 8 mA<br>+13 to +30 V for state 1<br>-30 to +3 V for state 0   |
| Alarm Contact Channels                 | 1, Relay output with current carrying capacity of 0.5 A @ 48 VDC  |
| Buttons                                | Reset button  |
| <b>DIP Switch Configuration</b>        |   |
| Ethernet Interface                     | Turbo Ring, Master, Coupler, Reserve  |
| <b>Power Parameters</b>                |   |
| Input Voltage                          | 12/24/48 VDC, Redundant dual inputs   |
| Operating Voltage                      | 12 to 57 VDC (> 50 VDC for PoE+ output recommended)   |
| Input Current                          | 4.08 A @ 48 VDC   |
| Max. PoE Power Output per Port         | 60 W  |
| Connection                             | 2 removable 4-contact terminal block(s)   |
| Power Consumption (Max.)               | Max. 18.96 W full loading without PDs' consumption  |
| Total PoE Power Budget                 | Max. 180 W for total PD's consumption @ 48 VDC input<br>Max. 150 W for total PD's consumption @ 24 VDC input<br>Max. 62 W for total PD's consumption @ 12 VDC input |
| Overload Current Protection            | Supported   |
| Reverse Polarity Protection            | Supported   |
| <b>Physical Characteristics</b>        |   |
| Housing                                | Metal   |
| IP Rating                              | IP40  |
| Dimensions                             | 49.1 x 135 x 116 mm (1.93 x 5.31 x 4.57 in)   |
| Weight                                 | 910 g (2.00 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | EDS-P506E-4PoE-2GTXSFP: -10 to 60°C (14 to 140°F)<br>EDS-P506E-4PoE-2GTXSFP-T: -40 to 75°C (-40 to 167°F)   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | UL 61010-2-201, EN 61010-2-201  |
| EMC                                    | EN 61000-6-2/-6-4   |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |

|                  |  |
|------------------|--|
| EMS              | IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-11 DIPs<br>IEC 61000-4-8 PFMF |
| Power Substation | IEEE 1613, IEC 61850-3 Edition 2.0   |
| Railway          | EN 50121-4   |
| Traffic Control  | NEMA TS2   |
| Vibration        | IEC 60068-2-6  |
| Bump             | IEC 61850-3 Edition 2.0  |
| Freefall         | IEC 60068-2-31   |
| Shock            | IEC 60068-2-27   |

#### MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 755,167 hrs              |
| Standards | Telcordia (Bellcore), GB |

#### Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


#### Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-P506E Series switch   |
| Cable            | 1 x USB type A male to USB type B male  |
| Installation Kit | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SFP slot   |
| Documentation    | 1 x quick installation guide<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x warranty card |
| Note             | SFP modules need to be purchased separately for use with this product.  |



## Dimensions

Unit: mm (inch)

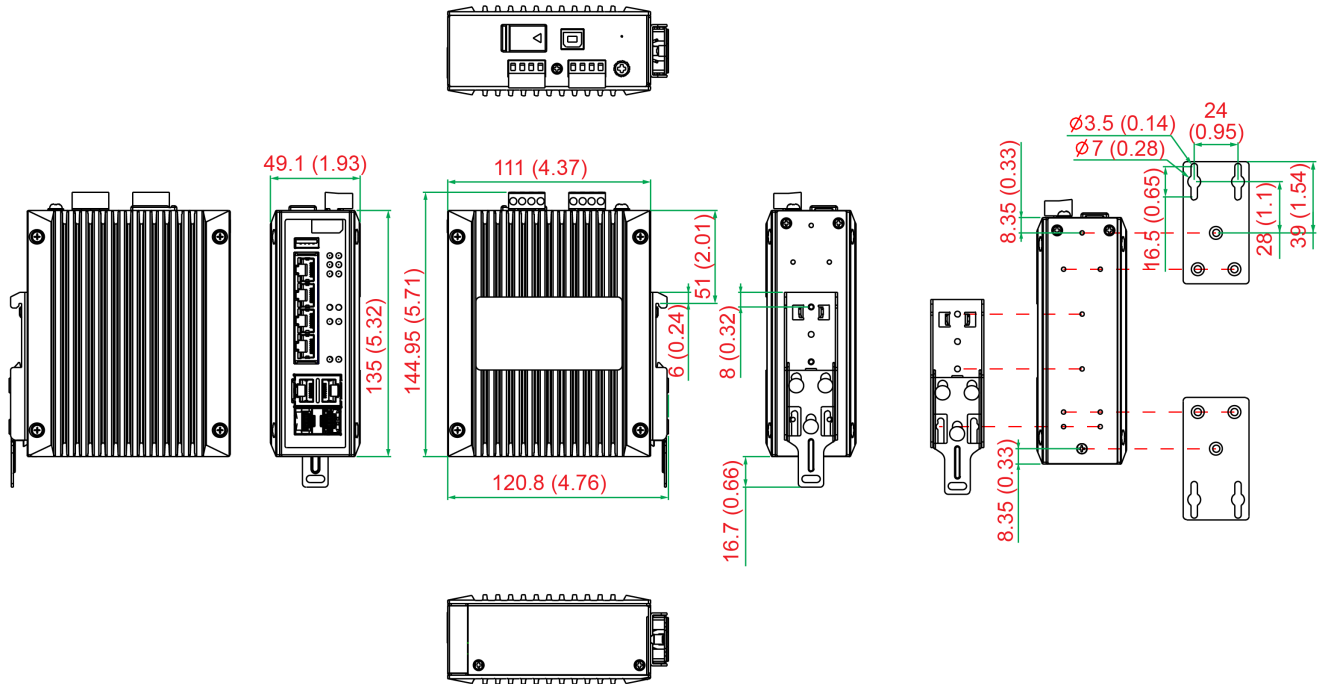

## Ordering Information

| Model Name               | Combo Ports<br>10/100/1000BaseT(X) or 100/<br>1000BaseSFP+ | PoE Ports<br>10/100BaseT(X), RJ45 Connector | Operating Temp. |
|--------------------------|--|---|-----------------|
| EDS-P506E-4PoE-2GTXSFP   | 2  | 4   | -10 to 60°C     |
| EDS-P506E-4PoE-2GTXSFP-T | 2  | 4   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|               |  |
|---------------|--|
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |

|                |  |
|----------------|--|
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

## Software


|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-P510 Series

7+3G-port Gigabit PoE managed Ethernet switches with 4 IEEE 802.3af PoE ports



## Features and Benefits

- 4 IEEE 802.3af-compliant PoE and Ethernet combo ports
- Provides up to 15.4 watts at 48 VDC per PoE port
- Intelligent power consumption detection, PD failure check, and PoE scheduling function
- 3 combo (10/100/1000BaseT(X) or 100/1000BaseSFP slot) Gigabit ports; 2 ports for redundant ring and 1 port for uplink
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

The EDS-P510 Series Gigabit managed redundant Ethernet switches have 4 10/100BaseT(X) 802.3af (PoE) compliant Ethernet ports and 3 combo Gigabit Ethernet ports. The EDS-P510 switches provide up to 15.4 watts of power per PoE port, and allow power to be supplied to connected devices (such as surveillance cameras, wireless access points, and IP phones) when AC power is not readily available or is cost-prohibitive to provide locally. The EDS-P510 switches are highly versatile, and their SFP fiber port can transmit data up to 80 km from the device to the control center with high EMI immunity. The Ethernet switches support advanced management and security features. The EDS-P510 Series is designed especially for security automation applications such as IP surveillance and entry system gates, which can benefit from a scalable backbone construction and PoE.

## Additional Features and Benefits

- Advanced PoE management function (PoE port setting, PD failure check, and PoE scheduling)
- Command Line Interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Support EtherNet/IP and Modbus/TCP protocols for device management and monitoring
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q) and TOS/DiffServ to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- Lock port function for blocking unauthorized access based on MAC address
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management to prevent unpredictable network status
- Port mirroring for online debugging
- Automatic warning by exception through e-mail, relay output

## Specifications

### Ethernet Interface

|   |   |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 3<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 10/100BaseT(X) Ports (RJ45 connector)                 | 3<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |

|  |   |
|--|---|
| PoE Ports (10/100BaseT(X), RJ45 connector) | 4<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection   |
| Standards                                  | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3af for PoE |

#### Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN  |
| Industrial Protocols | EtherNet/IP, Modbus TCP  |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Redundancy Protocols | LACP, Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | TACACS+, HTTPS/SSL, Port Lock, RADIUS, SSH   |
| Time Management      | NTP Server/Client, SNTP  |

#### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 2, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Digital Input Channels | 2   |
| Digital Inputs         | -30 to +3 V for state 0<br>+13 to +30 V for state 1<br>Max. input current: 8 mA |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 1024          |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

#### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 10-pin RJ45 (19200, n, 8, 1) |
|--------------|--|

#### DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 6-contact terminal block(s)                               |
| Input Current               | 1.5 A @ 48 VDC  |
| Input Voltage               | 48 VDC, Redundant dual inputs   |
| Operating Voltage           | 44 to 57 VDC  |
| Overload Current Protection | Supported   |
| Power Budget                | Max. 15.4 W for each PoE port<br>Max. 61.6 W for total PD consumption |
| Power Consumption (Max.)    | Max. 14.24 W full loading without PDs' consumption                    |
| Reverse Polarity Protection | Supported   |

## Physical Characteristics

|              |  |
|--------------|--|
| Dimensions   | 80.2 x 135 x 105 mm (3.16 x 5.31 x 4.13 in)          |
| Housing      | Metal  |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |
| IP Rating    | IP30   |
| Weight       | 1,170 g (2.58 lb)                                    |

## Environmental Limits

|  |   |
|--|---|
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| Operating Temperature                  | EDS-P510: 0 to 60°C (32 to 140°F)<br>EDS-P510-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | UL 508   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Maritime  | ABS, DNV-GL, LR, NK  |
| Freefall  | IEC 60068-2-31   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 205,384 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x EDS-P510 Series switch  |
| Cable            | 1 x DB9 female to RJ45 10-pin   |
| Installation Kit | 8 x cap, plastic, for RJ45 port<br>3 x cap, plastic, for SFP slot   |
| Documentation    | 1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x quick installation guide<br>1 x warranty card |
| Note             | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

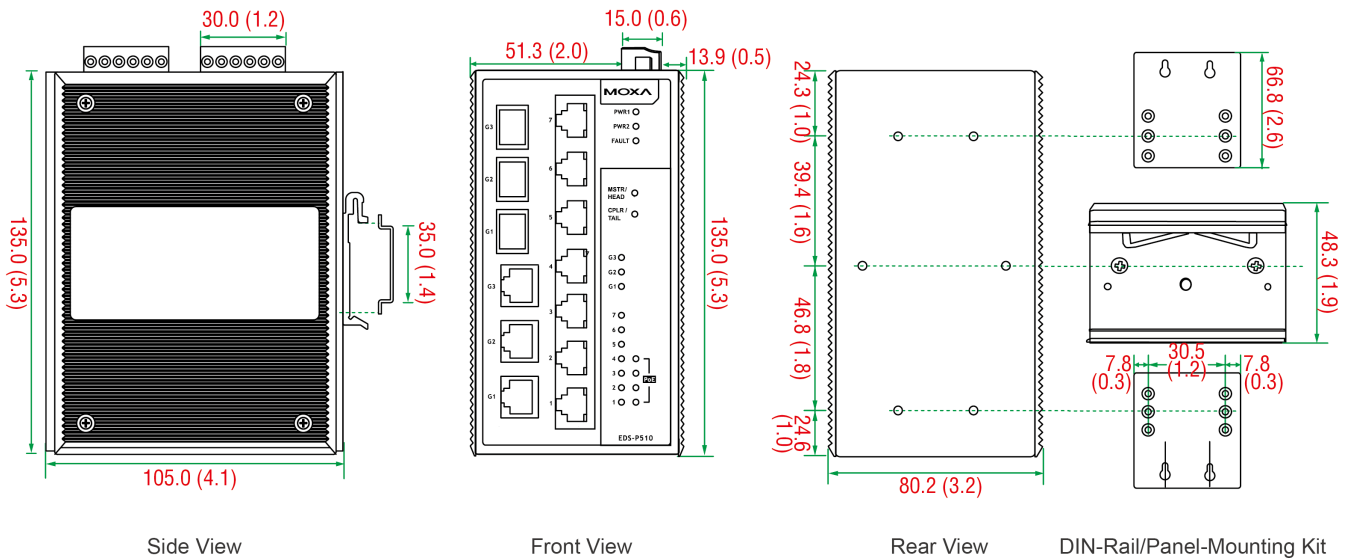

## Ordering Information

| Model Name | Combo Ports<br>10/100/1000BaseT(X) or 100/<br>1000BaseSFP | PoE Ports<br>10/100BaseT(X) | non-PoE Ports<br>10/100BaseT(X) | Operating Temp. |
|------------|---|-----------------------------|---------------------------------|-----------------|
| EDS-P510   | 3   | 4                           | 3                               | -10 to 60°C     |
| EDS-P510-T | 3   | 4                           | 3                               | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature                                       |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                     |
| SFP-1GZXC      | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, 0 to 60°C operating temperature   |



|              |   |
|--------------|---|
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
|--------------|---|

### Power Supplies

|             |   |
|-------------|---|
| DR-120-48   | 120W/2.5A DIN-rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-75-48    | 75W/1.6A DIN-rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| DRP-240-48  | DIN-rail 48 VDC power supply with 240W/5A, 85 to 264 VAC, or 120 to 370 VDC input, -10 to 70°C operating temperature  |
| SDR-480P-48 | DIN-rail 48 VDC power supply with 480W/10A, 90 to 264 VAC, or 127 to 370 VDC input, (current sharing up to 3840 W), -25 to 70°C operating temperature             |

### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-46-01 | Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm |
|----------|---|

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Oct 31, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# EDS-P510A Series

8+2G-port Gigabit PoE+ managed Ethernet switches with 8 IEEE 802.3af/at PoE+ ports



## Features and Benefits

- 8 built-in PoE+ ports compliant with IEEE 802.3af/at
- Up to 36 W output per PoE+ port
- 3 kV LAN surge protection for extreme outdoor environments
- PoE diagnostics for powered-device mode analysis
- 2 Gigabit combo ports for high-bandwidth and long-distance communication
- Operates with 240 watts full PoE+ loading at -40 to 75°C
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

Moxa's EDS-P510A Series has 8 10/100BaseT(X), 802.3af (PoE), and 802.3at (PoE+)-compliant Ethernet ports, and 2 combo Gigabit Ethernet ports. The EDS-P510A-8PoE Ethernet switches provide up to 30 watts of power per PoE+ port in standard mode and allow high-power output of up to 36 watts for industrial heavy-duty PoE devices, such as weather-proof IP surveillance cameras with wipers/heaters, high-performance wireless access points, and IP phones. The EDS-P510A Ethernet Series is highly versatile, and the SFP fiber ports can transmit data up to 120 km from the device to the control center with high EMI immunity.

The Ethernet switches support a variety of management functions, as well as STP/RSTP, Turbo Ring, Turbo Chain, PoE power management, PoE device auto-checking, PoE power scheduling, PoE diagnostic, IGMP, VLAN, QoS, RMON, bandwidth management, and port mirroring. The EDS-P510A Series is designed with 3 kV surge protection for harsh outdoor applications to increase the reliability of PoE systems.

## Additional Features and Benefits

- Supports different PoE output settings (High-power 36 W, Force and Legacy modes) to maximize powered device compatibility
- Supports Smart PoE functions (PoE diagnosis, PD failure check, PoE scheduling, PoE Event Warning) to enhance PoE operational efficiency
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- Compatible with PROFINET protocol for transparent data transmission
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- Lock port function for blocking unauthorized access based on MAC address
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output

1. Gigabit Ethernet recovery time < 50 ms

## Specifications

### Ethernet Interface

|   |  |
|---|--|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 2<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection<br>Auto negotiation speed  |
| PoE Ports (10/100BaseT(X), RJ45 connector)            | 8<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection<br>Auto negotiation speed  |
| Standards   | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3af/at for PoE/PoE+ output<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | GMRP, GVRP, IGMP v1/v2, Port-based VLAN   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Fiber check, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | LACP, Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security             | HTTPS/SSL, Port Lock, RADIUS, TACACS+, SSH  |
| Time Management      | NTP Server/Client, SNTP   |

### Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 1024          |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 10-pin RJ45 (19200, n, 8, 1) |
|--------------|--|

### DIP Switch Configuration

|                    |                                      |
|--------------------|--------------------------------------|
| Ethernet Interface | Turbo Ring, Master, Coupler, Reserve |
|--------------------|--------------------------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 0.5 A @ 48 VDC                |
| Digital Input Channels | 1   |
| Digital Inputs         | Max. input current: 8 mA<br>+13 to +30 V for state 1<br>-30 to +3 V for state 0 |

## Power Parameters

|                             |  |
|-----------------------------|--|
| Input Voltage               | 48 VDC, Redundant dual inputs                                      |
| Operating Voltage           | 44 to 57 VDC   |
| Input Current               | 5.36 A @ 48 VDC  |
| Power Consumption (Max.)    | Max. 17.28 W full loading without PDs' consumption                 |
| Power Budget                | Max. 240 W for total PD consumption<br>Max. 36 W for each PoE port |
| Connection                  | 2 removable 2-contact terminal block(s)                            |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP30   |
| Dimensions   | 79.2 x 135 x 105 mm (3.12 x 5.31 x 4.13 in)          |
| Weight       | 1030 g (2.28 lb)                                     |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |   |
|--|---|
| Operating Temperature                  | EDS-P510A-8PoE-2GTXSFP: -10 to 60°C (14 to 140°F)<br>EDS-P510A-8PoE-2GTXSFP-T: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |


## Standards and Certifications

|                     |  |
|---------------------|--|
| Safety              | UL 508   |
| EMC                 | EN 55032/24  |
| EMI                 | CISPR 32, FCC Part 15B Class A   |
| EMS                 | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations | Class I Division 2   |
| Railway             | EN 50121-4   |
| Traffic Control     | NEMA TS2   |

|                         |   |
|-------------------------|---|
| Freefall                | IEC 60068-2-31  |
| Shock                   | IEC 60068-2-27  |
| Vibration               | IEC 60068-2-6   |
| <b>MTBF</b>             |   |
| Time                    | 708,972 hrs   |
| Standards               | Telcordia (Bellcore), GB  |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x EDS-P510A Series switch   |
| Cable                   | 1 x DB9 female to RJ45 10-pin   |
| Installation Kit        | 4 x cap, plastic, for RJ45 port<br>2 x cap, plastic, for SFP slot   |
| Documentation           | 1 x quick installation guide<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x warranty card |
| Note                    | SFP modules need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

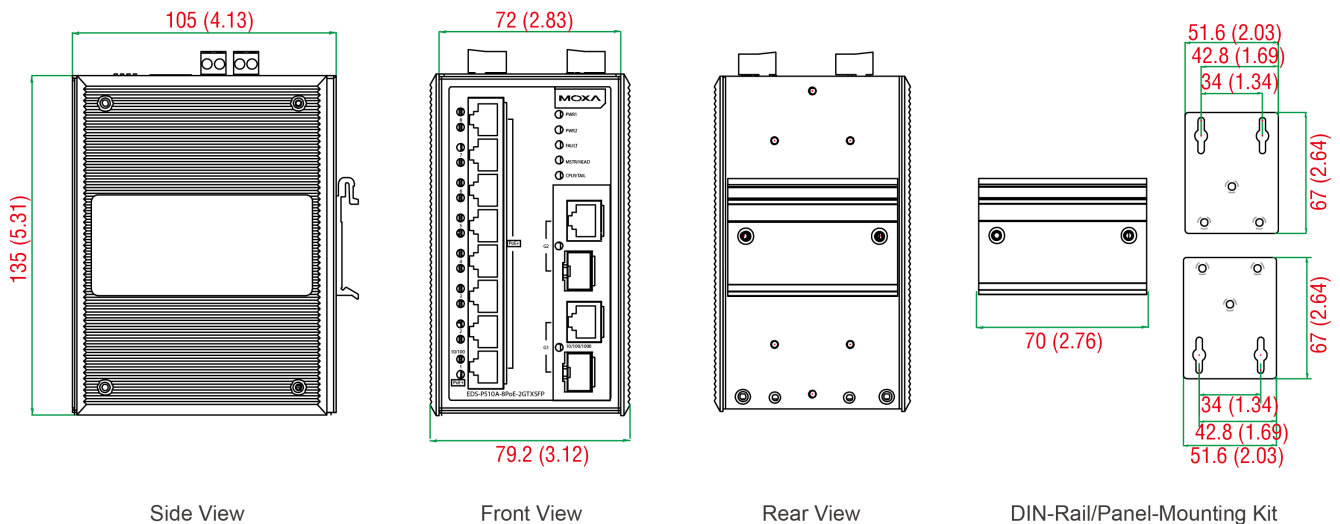

## Ordering Information

| Model Name               | Combo Ports<br>10/100/1000BaseT(X) or 100/<br>1000BaseSFP+ | PoE Ports<br>10/100BaseT(X), RJ45 Connector | Operating Temp. |
|--------------------------|--|---|-----------------|
| EDS-P510A-8PoE-2GTXSFP   | 2  | 8   | -10 to 60°C     |
| EDS-P510A-8PoE-2GTXSFP-T | 2  | 8   | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |

|              |   |
|--------------|---|
| SFP-1GLXLC   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

#### Power Supplies

|             |   |
|-------------|---|
| DR-120-48   | 120W/2.5A DIN-rail 48 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-75-48    | 75W/1.6A DIN-rail 48 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| DRP-240-48  | DIN-rail 48 VDC power supply with 240W/5A, 85 to 264 VAC, or 120 to 370 VDC input, -10 to 70°C operating temperature  |
| SDR-480P-48 | DIN-rail 48 VDC power supply with 480W/10A, 90 to 264 VAC, or 127 to 370 VDC input, (current sharing up to 3840 W), -25 to 70°C operating temperature             |

#### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-46-01 | Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm |
|----------|---|

#### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# ICS-G7526A Series

24G+2 10GbE-port Layer 2 full Gigabit managed Ethernet switches



## Features and Benefits

- 24 Gigabit Ethernet ports plus up to 2 10G Ethernet ports
- Up to 26 optical fiber connections (SFP slots)
- Fanless, -10 to 60°C operating temperature range
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7526A Series full Gigabit backbone switches are equipped with 24 Gigabit Ethernet ports plus up to 2 10G Ethernet ports, making them ideal for large-scale industrial networks.

The ICS-G7526A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

## Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs
- Automatic warning by exception through email and relay output
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Redundant, dual AC power inputs

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | ICS-G7526A-4GTXSFP-2XG-HV-HV: 20<br>ICS-G7526A-8GSFP-4GTXSFP-2XG-HV-HV: 12       |
| 100/1000BaseSFP Ports                      | ICS-G7526A-8GSFP-4GTXSFP-2XG-HV-HV: 8<br>ICS-G7526A-20GSFP-4GTXSFP-2XG-HV-HV: 20 |
| 10GbE SFP+ Slots                           | 2  |



|   |   |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4   |
| Standards   | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3ae for 10 Gigabit Ethernet |

#### Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4/IPv6, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP   |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET   |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| DRAM               | 128 MB        |
| Flash              | 16 MB         |
| IGMP Groups        | 4096          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 12 Mbits      |
| VLAN ID Range      | VID 1 to 4094 |
| Priority Queues    | 8             |

#### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

#### Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC                     |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +1 V for state 0<br>Max. input current: 8 mA |

## Power Parameters

|                             |                                       |
|-----------------------------|---------------------------------------|
| Input Voltage               | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage           | 85 to 264 VAC                         |
| Overload Current Protection | Supported                             |
| Reverse Polarity Protection | Supported                             |
| Input Current               | 0.83/0.47 A @ 110/220 VAC             |

## Physical Characteristics

|              |   |
|--------------|---|
| IP Rating    | IP30  |
| Dimensions   | 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in) |
| Weight       | 5300 g (11.69 lb)                             |
| Installation | Rack mounting                                 |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | EN 60950-1, UL 60950-1   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Railway   | EN 50121-4   |
| Freefall  | IEC 60068-2-32   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |
| MTBF      |  |
| Time      | 419,734 hrs  |
| Standards | Telcordia (Bellcore), GB   |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x ICS-G7526A Series switch   |
| Cable            | 1 x USB type A male to USB type B male   |
| Installation Kit | 2 x rack-mounting ear<br>10 x cap, plastic, for SFP slot (ICS-G7526A-4GTXSFP-2XG-HV-HV)<br>18 x cap, plastic, for SFP slot (ICS-G7526A-8GSFP-4GTXSFP-2XG-HV-HV)<br>30 x cap, plastic, for SFP slot (ICS-G7526A-20GSFP-4GTXSFP-2XG-HV-HV) |
| Power Supply     | 1 x power cord, EU type<br>1 x power cord, US type   |
| Documentation    | 1 x document and software CD<br>1 x warranty card  |
| Note             | SFP modules need to be purchased separately for use with this product.   |

## Dimensions

Unit: mm (inch)

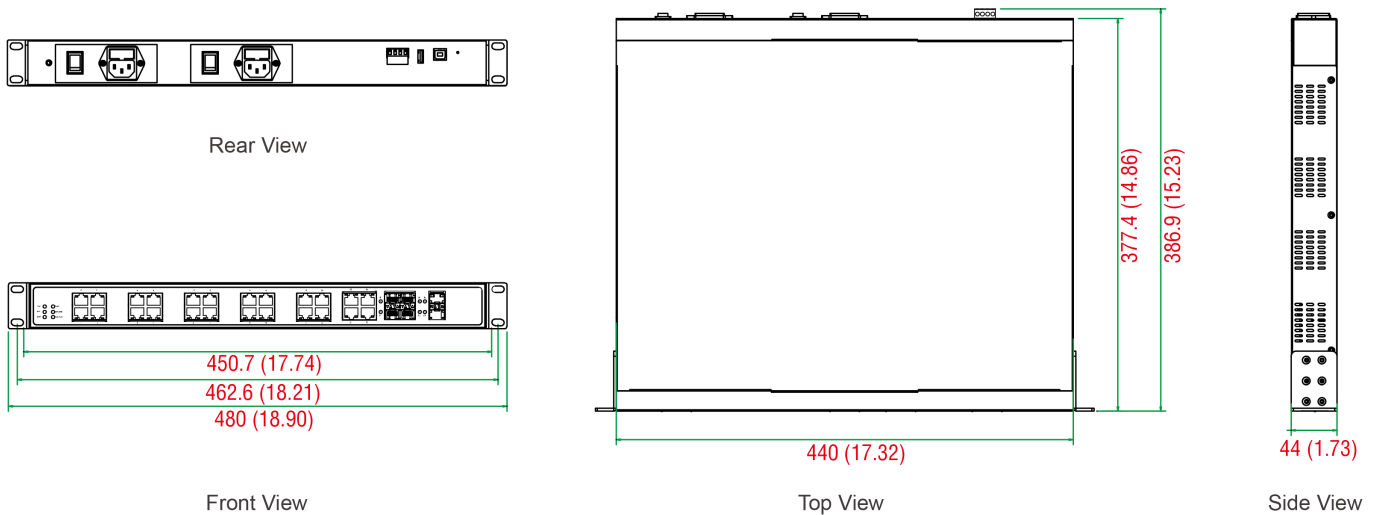

## Ordering Information

| Model Name                          | Layer | 10GbE SFP+ Slots | Combo Ports<br>10/100/<br>1000BaseT(X) or<br>100/1000BaseSFP+ | 100/1000Base SFP<br>Slots | 10/100/<br>1000BaseT(X) Ports<br>RJ45 Connector | Operating Temp. |
|-------------------------------------|-------|------------------|---|---------------------------|---|-----------------|
| ICS-G7526A-4GTXSFP-2XG-HV-HV        | 2     | 2                | 4   | 0                         | 20  | -10 to 60°C     |
| ICS-G7526A-8GSFP-4GTXSFP-2XG-HV-HV  | 2     | 2                | 4   | 8                         | 12  | -10 to 60°C     |
| ICS-G7526A-20GSFP-4GTXSFP-2XG-HV-HV | 2     | 2                | 4   | 20                        | 0   | -10 to 60°C     |

## Accessories (sold separately)

### Storage Kits

|            |   |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXC      | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |

|                |   |
|----------------|---|
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXL      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXL-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |
| SFP-10GERLC    | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-10GLRLC    | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature      |
| SFP-10GSRLC    | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature       |

### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# ICS-G7528A Series

24G+4 10GbE-port Layer 2 full Gigabit managed Ethernet switches



## Features and Benefits

- 24 Gigabit Ethernet ports plus up to 4 10G Ethernet ports
- Up to 28 optical fiber connections (SFP slots)
- Fanless, -10 to 60°C operating temperature range
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7528A Series full Gigabit backbone switches are equipped with 24 Gigabit Ethernet ports plus up to 4 10 Gigabit Ethernet ports, making them ideal for large-scale industrial networks.

The ICS-G7528A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

## Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Automatic warning by exception through email and relay output
- Digital inputs for integrating sensors and alarms with IP networks
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management (ICS-G7800A Series)
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Redundant, dual AC power inputs

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | ICS-G7528A-4GTXSFP-4XG-HV-HV: 20<br>ICS-G7528A-8GSFP-4GTXSFP-4XG-HV-HV: 12       |
| 100/1000BaseSFP Ports                      | ICS-G7528A-8GSFP-4GTXSFP-4XG-HV-HV: 8<br>ICS-G7528A-20GSFP-4GTXSFP-4XG-HV-HV: 20 |
| 10GbE SFP+ Slots                           | 4  |

|   |   |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4   |
| Standards   | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3ae for 10 Gigabit Ethernet |

#### Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4/IPv6, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP   |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET   |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| DRAM               | 128 MB        |
| Flash              | 16 MB         |
| IGMP Groups        | 4096          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 12 Mbits      |
| VLAN ID Range      | VID 1 to 4094 |
| Priority Queues    | 8             |

#### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

#### Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC                     |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +1 V for state 0<br>Max. input current: 8 mA |

## Power Parameters

|                             |                                       |
|-----------------------------|---------------------------------------|
| Input Voltage               | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage           | 85 to 264 VAC                         |
| Overload Current Protection | Supported                             |
| Reverse Polarity Protection | Supported                             |
| Input Current               | 0.99/0.65 A @ 110/220 VAC             |

## Physical Characteristics

|              |   |
|--------------|---|
| IP Rating    | IP30  |
| Dimensions   | 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in) |
| Weight       | 5300 g (11.69 lb)                             |
| Installation | Rack mounting                                 |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | EN 60950-1, UL 60950-1   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Railway   | EN 50121-4   |
| Freefall  | IEC 60068-2-32   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |
| MTBF      |  |
| Time      | 403,574 hrs  |
| Standards | Telcordia (Bellcore), GB   |



## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents


|                  |  |
|------------------|--|
| Device           | 1 x ICS-G7528A Series switch   |
| Cable            | 1 x USB type A male to USB type B male   |
| Installation Kit | 2 x rack-mounting ear<br>12 x cap, plastic, for SFP slot (ICS-G7528A-4GTXSFP-4XG-HV-HV)<br>20 x cap, plastic, for SFP slot (ICS-G7528A-8GSFP-4GTXSFP-4XG-HV-HV)<br>32 x cap, plastic, for SFP slot (ICS-G7528A-20GSFP-4GTXSFP-4XG-HV-HV) |
| Power Supply     | 1 x power cord, EU type<br>1 x power cord, US type   |
| Documentation    | 1 x document and software CD<br>1 x warranty card  |
| Note             | SFP modules need to be purchased separately for use with this product.   |

## Dimensions


Unit: mm (inch)




Rear View

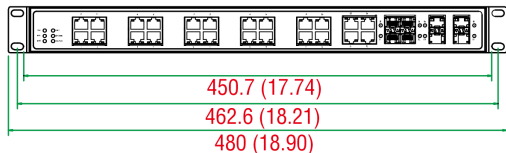

Front View

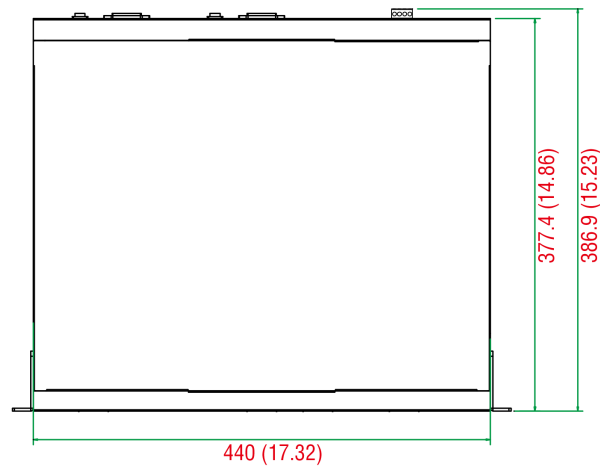

Top View



Side View

## Ordering Information

| Model Name                          | Layer | 10GbE SFP+ Slots | Combo Ports<br>10/100/<br>1000BaseT(X) or<br>100/1000BaseSFP+ | 100/1000Base SFP<br>Slots | 10/100/<br>1000BaseT(X) Ports<br>RJ45 Connector | Operating Temp. |
|-------------------------------------|-------|------------------|---|---------------------------|---|-----------------|
| ICS-G7528A-4GTXSFP-4XG-HV-HV        | 2     | 4                | 4   | 0                         | 20  | -10 to 60°C     |
| ICS-G7528A-8GSFP-4GTXSFP-4XG-HV-HV  | 2     | 4                | 4   | 8                         | 12  | -10 to 60°C     |
| ICS-G7528A-20GSFP-4GTXSFP-4XG-HV-HV | 2     | 4                | 4   | 20                        | 0   | -10 to 60°C     |

## Accessories (sold separately)

### Storage Kits

|            |   |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |

|                |   |
|----------------|---|
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXL      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXL-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |
| SFP-10GERLC    | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-10GLRLC    | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature      |
| SFP-10GSRLC    | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature       |

### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# ICS-G7748A Series

## 48G-port Layer 2 full Gigabit modular managed Ethernet switches



### Features and Benefits

- Up to 48 Gigabit Ethernet ports
- Up to 48 optical fiber connections (SFP slots)
- Up to 48 PoE+ ports with external power supply (with IM-G7000A-4PoE module)
- Fanless, -10 to 60°C operating temperature range
- Modular design for maximum flexibility and hassle-free future expansion
- Hot-swappable interface and power modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7748A Series full Gigabit backbone switches' modular design makes network planning easy, and allows greater flexibility by letting you install up to 48 Gigabit Ethernet ports.

The ICS-G7748A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

### Additional Features and Benefits

- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics (with IM-G7000A-4PoE module)
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Redundant, dual AC power inputs
- Digital inputs for integrating sensors and alarms with IP networks
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC                     |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +1 V for state 0<br>Max. input current: 8 mA |

## Ethernet Interface

|                  |  |
|------------------|--|
| Slot Combination | 12 slots for 4-port interface modules (10/100/1000BaseT(X), or PoE+ 10/100/1000BaseT(X), or 100/1000BaseSFP slots). See the IM-G7000A datasheet for Gigabit Ethernet module product information.   |
| Standards        | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3af/at for PoE/PoE+ output |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4/IPv6, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| DRAM               | 128 MB        |
| Flash              | 16 MB         |
| IGMP Groups        | 4096          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 12 Mbits      |
| VLAN ID Range      | VID 1 to 4094 |
| Priority Queues    | 8             |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## Power Parameters

|                             |                                       |
|-----------------------------|---------------------------------------|
| Input Voltage               | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage           | 85 to 264 VAC                         |
| Overload Current Protection | Supported                             |
| Reverse Polarity Protection | Supported                             |
| Input Current               | 0.87/0.51 A @ 110/220 VAC             |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 440 x 176 x 523.8 mm (17.32 x 6.93 x 20.62 in) |
| Weight       | 12,900 g (28.5 lb)                             |
| Installation | Rack mounting                                  |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | EN 60950-1, UL 60950-1   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Railway   | EN 50121-4   |
| Freefall  | IEC 60068-2-32   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 314,973 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|        |  |
|--------|--|
| Device | 1 x ICS-G7748A Series switch           |
| Cable  | 1 x USB type A male to USB type B male |


|                  |  |
|------------------|--|
| Installation Kit | 2 x rack-mounting ear<br>4 x cap, plastic, for SFP slot  |
| Power Supply     | 1 x power cord, EU type<br>1 x power cord, US type   |
| Documentation    | 1 x document and software CD<br>1 x warranty card  |
| Note             | 48 V external power supply, SFP modules and/or modules from the IM-G7000A Module Series need to be purchased separately for use with this product. |

## Dimensions


Unit: mm (inch)

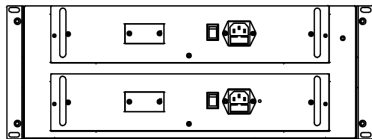


Rear View

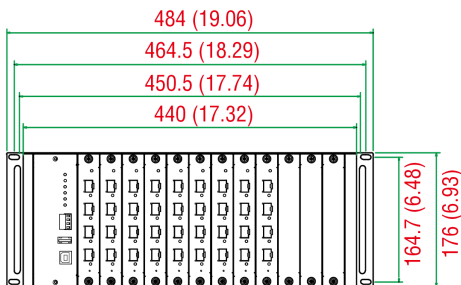

Front View

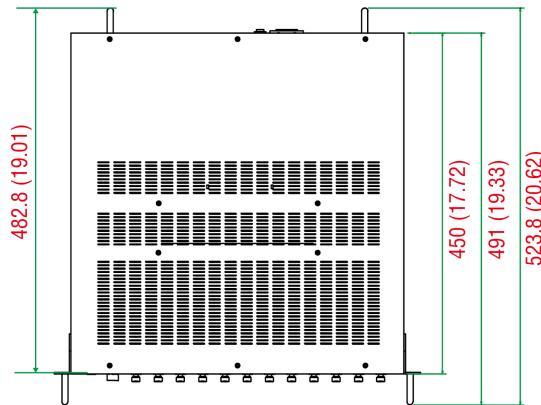

Top View

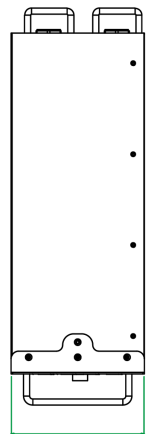

Side View

## Ordering Information

| Model Name       | Layer | 10GbE SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|------------------|-------|------------------|------------------------|--|-----------------|
| ICS-G7748A-HV-HV | 2     | 0                | Up to 48               | Up to 48                                 | -10 to 60°C     |

## Accessories (sold separately)

### IM-G7000A Module Series

|                 |  |
|-----------------|--|
| IM-G7000A-4GSFP | Gigabit Ethernet interface module with 4 100/1000BaseSFP slots, -10 to 60°C operating temperature          |
| IM-G7000A-4GTX  | Gigabit Ethernet interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature      |
| IM-G7000A-4PoE  | Gigabit Ethernet PoE+ interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |

### Power Supplies

|               |  |
|---------------|--|
| PWR-G7000A-AC | 85 to 264 VAC power supply module for the ICS-G7748A/G7750A/G7752A/G7848A/G7850A/G7852A Series |
|---------------|--|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
|--------------|---|

|                 |  |
|-----------------|--|
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC      | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T    | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXC       | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXC-T     | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, -40 to 85°C operating temperature   |
| SFP-1GSXC       | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature                                       |
| SFP-1GSXC-T     | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                     |
| SFP-1GZXC       | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, 0 to 60°C operating temperature   |
| SFP-1GZXC-T     | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, -40 to 85°C operating temperature   |



|             |  |
|-------------|--|
| SFP-10GERLC | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-10GLRLC | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-10GSRLC | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature  |

#### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

#### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jun 17, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# ICS-G7750A Series

48G/48G+2 10GbE/48G+2 10GbE-port Layer 2/Layer 3 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Up to 48 Gigabit Ethernet ports plus 2 10G Ethernet ports
- Up to 50 optical fiber connections (SFP slots)
- Up to 48 PoE+ ports with external power supply (with IM-G7000A-4PoE module)
- Fanless, -10 to 60°C operating temperature range
- Modular design for maximum flexibility and hassle-free future expansion
- Hot-swappable interface and power modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7750A Series full Gigabit backbone switches' modular design makes network planning easy, and allows greater flexibility by letting you install up to 48 Gigabit Ethernet ports plus 2 10 Gigabit Ethernet ports.

The ICS-G7750A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

## Additional Features and Benefits

- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics (with IM-G7000A-4PoE module)
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Digital inputs for integrating sensors and alarms with IP networks
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Redundant, dual AC power inputs

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC                     |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +1 V for state 0<br>Max. input current: 8 mA |

### Ethernet Interface

|                  |  |
|------------------|--|
| 10GbE SFP+ Slots | 2  |
| Slot Combination | 12 slots for 4-port interface modules (10/100/1000BaseT(X), or PoE+ 10/100/1000BaseT(X), or 100/1000BaseSFP slots). See the IM-G7000A datasheet for Gigabit Ethernet module product information.   |
| Standards        | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3af/at for PoE/PoE+ output<br>IEEE 802.3ae for 10 Gigabit Ethernet |

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4/IPv6, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |

### Switch Properties

|                    |          |
|--------------------|----------|
| DRAM               | 128 MB   |
| Flash              | 16 MB    |
| IGMP Groups        | 4096     |
| Jumbo Frame Size   | 9.6 KB   |
| MAC Table Size     | 16 K     |
| Max. No. of VLANs  | 256      |
| Packet Buffer Size | 12 Mbits |

|  |  |
|--|--|
| VLAN ID Range                          | VID 1 to 4094  |
| Priority Queues                        | 8  |
| <b>USB Interface</b>                   |  |
| Storage Port                           | USB Type A   |
| <b>Serial Interface</b>                |  |
| Console Port                           | USB-serial console (Type B connector)  |
| <b>Power Parameters</b>                |  |
| Input Voltage                          | 110 to 220 VAC, Redundant dual inputs  |
| Operating Voltage                      | 85 to 264 VAC  |
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| Input Current                          | 0.94/0.55 A @ 110/220 VAC  |
| <b>Physical Characteristics</b>        |  |
| IP Rating                              | IP30   |
| Dimensions                             | 440 x 176 x 523.8 mm (17.32 x 6.93 x 20.62 in)   |
| Weight                                 | 12,900 g (28.5 lb)   |
| Installation                           | Rack mounting  |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Safety                                 | EN 60950-1, UL 60950-1   |
| EMC                                    | EN 55032/24  |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Railway                                | EN 50121-4   |
| Freefall                               | IEC 60068-2-32   |
| Shock                                  | IEC 60068-2-27   |
| Vibration                              | IEC 60068-2-6  |
| <b>MTBF</b>                            |  |
| Time                                   | 282,329 hrs  |
| Standards                              | Telcordia (Bellcore), GB   |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents


|                  |  |
|------------------|--|
| Device           | 1 x ICS-G7750A Series switch   |
| Cable            | 1 x USB type A male to USB type B male   |
| Installation Kit | 2 x rack-mounting ear<br>6 x cap, plastic, for SFP slot  |
| Power Supply     | 1 x power cord, EU type<br>1 x power cord, US type   |
| Documentation    | 1 x document and software CD<br>1 x warranty card  |
| Note             | 48 V external power supply, SFP modules and/or modules from the IM-G7000A Module Series need to be purchased separately for use with this product. |

## Dimensions


Unit: mm (inch)

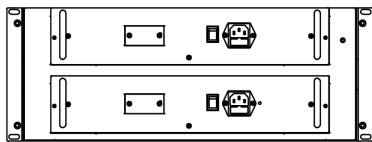


Rear View

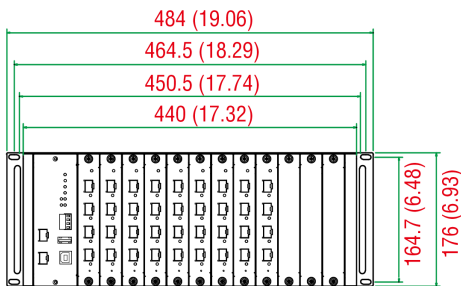

Front View

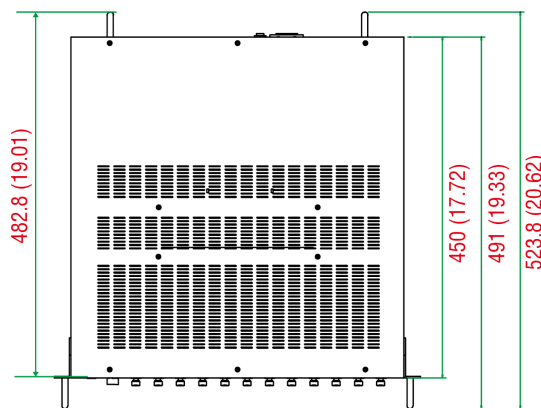

Top View

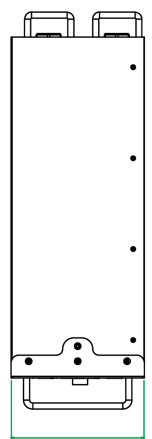

Side View

## Ordering Information

| Model Name           | Layer | 10GbE SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|----------------------|-------|------------------|------------------------|--|-----------------|
| ICS-G7750A-2XG-HV-HV | 2     | 2                | Up to 48               | Up to 48                                 | -10 to 60°C     |

## Accessories (sold separately)

### IM-G7000A Module Series

|                 |  |
|-----------------|--|
| IM-G7000A-4GSFP | Gigabit Ethernet interface module with 4 100/1000BaseSFP slots, -10 to 60°C operating temperature          |
| IM-G7000A-4GTX  | Gigabit Ethernet interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature      |
| IM-G7000A-4PoE  | Gigabit Ethernet PoE+ interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |

## Power Supplies

|               |  |
|---------------|--|
| PWR-G7000A-AC | 85 to 264 VAC power supply module for the ICS-G7748A/G7750A/G7752A/G7848A/G7850A/G7852A Series |
|---------------|--|

## SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXL      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXL-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXL      | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXL-T    | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXL       | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXL-T     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |

|                |   |
|----------------|---|
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-10GERLC    | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-10GLRLC    | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature      |
| SFP-10GSRLC    | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature       |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

#### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

#### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jun 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.



# ICS-G7752A Series

48G+4 10GbE-port Layer 2 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Up to 48 Gigabit Ethernet ports plus 4 10G Ethernet ports
- Up to 52 optical fiber connections (SFP slots)
- Up to 48 PoE+ ports with external power supply (with IM-G7000A-4PoE module)
- Fanless, -10 to 60°C operating temperature range
- Modular design for maximum flexibility and hassle-free future expansion
- Hot-swappable interface and power modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

## Certifications



## Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7752A Series full Gigabit backbone switches' modular design makes network planning easy, and allows greater flexibility by letting you install up to 48 Gigabit Ethernet ports plus 4 10 Gigabit Ethernet ports.

The ICS-G7752A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

## Additional Features and Benefits

- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics (with IM-G7000A-4PoE module)
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Automatic warning by exception through email and relay output
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging

## Specifications

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC                     |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +1 V for state 0<br>Max. input current: 8 mA |



## Ethernet Interface

|                  |  |
|------------------|--|
| 10GbE SFP+ Slots | 4  |
| Slot Combination | 12 slots for 4-port interface modules (10/100/1000BaseT(X), or PoE+ 10/100/1000BaseT(X), or 100/1000BaseSFP slots) <sup>1</sup>  |
| Standards        | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br>IEEE 802.3af/at for PoE/PoE+ output<br>IEEE 802.3ae for 10 Gigabit Ethernet |

## Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4/IPv6, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP   |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| DRAM               | 128 MB        |
| Flash              | 16 MB         |
| IGMP Groups        | 4096          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 12 Mbits      |
| VLAN ID Range      | VID 1 to 4094 |
| Priority Queues    | 8             |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

1. See the IM-G7000A datasheet for Gigabit Ethernet module product information.

## Power Parameters

|                             |                                       |
|-----------------------------|---------------------------------------|
| Input Voltage               | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage           | 85 to 264 VAC                         |
| Overload Current Protection | Supported                             |
| Reverse Polarity Protection | Supported                             |
| Input Current               | 1.01/0.58 A @ 110/220 VAC             |

## Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP30   |
| Dimensions   | 440 x 176 x 523.8 mm (17.32 x 6.93 x 20.62 in) |
| Weight       | 12,900 g (28.5 lb)                             |
| Installation | Rack mounting                                  |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | EN 60950-1, UL 60950-1   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Railway   | EN 50121-4   |
| Freefall  | IEC 60068-2-32   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 274,488 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|        |  |
|--------|--|
| Device | 1 x ICS-G7752A Series switch           |
| Cable  | 1 x USB type A male to USB type B male |


|                  |  |
|------------------|--|
| Installation Kit | 2 x rack-mounting ear<br>8 x cap, plastic, for SFP slot  |
| Power Supply     | 1 x power cord, EU type<br>1 x power cord, US type   |
| Documentation    | 1 x document and software CD<br>1 x warranty card  |
| Note             | 48 V external power supply, SFP modules and/or modules from the IM-G7000A Module Series need to be purchased separately for use with this product. |

## Dimensions


Unit: mm (inch)

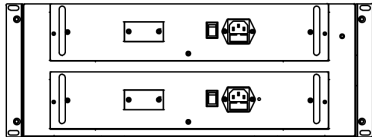


Rear View

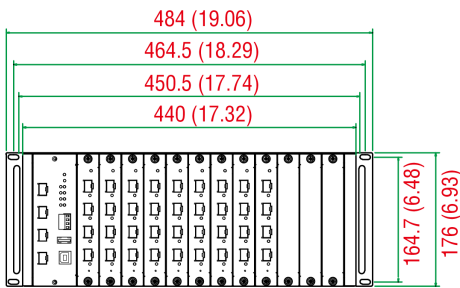

Front View

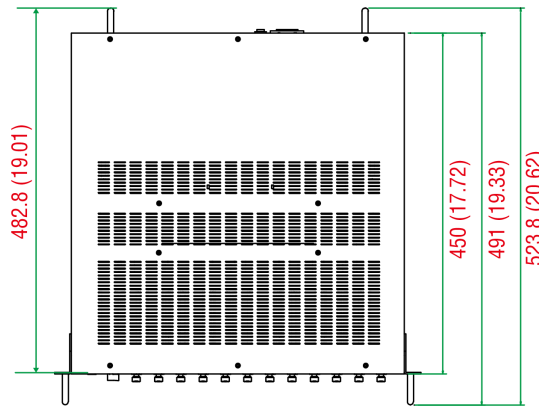

Top View

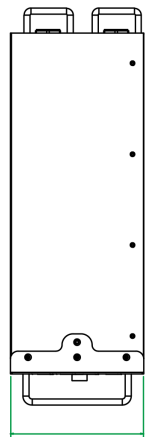

Side View

## Ordering Information

| Model Name           | Layer | 10GbE SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|----------------------|-------|------------------|------------------------|--|-----------------|
| ICS-G7752A-4XG-HV-HV | 2     | 4                | Up to 48               | Up to 48                                 | -10 to 60°C     |

## Accessories (sold separately)

### IM-G7000A Module Series

|                 |  |
|-----------------|--|
| IM-G7000A-4GSFP | Gigabit Ethernet interface module with 4 100/1000BaseSFP slots, -10 to 60°C operating temperature          |
| IM-G7000A-4GTX  | Gigabit Ethernet interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature      |
| IM-G7000A-4PoE  | Gigabit Ethernet PoE+ interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |

### Power Supplies

|               |  |
|---------------|--|
| PWR-G7000A-AC | 85 to 264 VAC power supply module for the ICS-G7748A/G7750A/G7752A/G7848A/G7850A/G7852A Series |
|---------------|--|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
|--------------|---|

|                 |  |
|-----------------|--|
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC      | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T    | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXC       | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLXC-T     | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, -40 to 85°C operating temperature   |
| SFP-1GSXC       | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature                                       |
| SFP-1GSXC-T     | SFP module with 1 1000BaseSXC port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                     |
| SFP-1GZXC       | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, 0 to 60°C operating temperature   |
| SFP-1GZXC-T     | SFP module with 1 1000BaseZXC port with LC connector for 80 km transmission, -40 to 85°C operating temperature   |

|                |  |
|----------------|--|
| SFP-10GERLC    | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-10GLRLC    | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |
| SFP-10GSRLC    | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature    |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

#### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

#### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jun 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# IKS-6726A Series

## 24+2G-port modular managed Ethernet switches



### Features and Benefits

- 2 Gigabit plus 24 Fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 24 VDC, 48 VDC, or 110/220 VDC/VAC power supply range
- Modular design lets you choose from a variety of media combinations
- -40 to 75°C operating temperature range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The IKS-6726A Series is designed to meet the rigorous demands of mission-critical applications for industry and business, such as traffic control systems and maritime applications. The IKS-6726A's Gigabit and fast Ethernet backbone, redundant ring, and 24/48 VDC or 110/220 VAC dual isolated redundant power supplies increase the reliability of your communications and save on cabling and wiring costs.

The modular design of the IKS-6726A also makes network planning easy, and allows greater flexibility by letting you install up to 2 Gigabit ports and 24 fast Ethernet ports.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Line-swap fast recovery
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management prevents unpredictable network status with "Lock port" to restrict access to authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Automatic recovery of connected device's IP addresses
- Configurable by web browser, Telnet/serial console, CLI, Windows utility, and ABC-02-USB automatic backup configurator

## Specifications

### Input/Output Interface

|  |   |
|--|---|
| Alarm Contact Channels                               | 1 relay output with current carrying capacity of 1 A @ 24 VDC |
| <b>Ethernet Interface</b>                            |   |
| 10/100BaseT(X) Ports (RJ45 connector)                | 8   |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | 2   |

|           |   |
|-----------|---|
| Module    | 2 modular slots for any 8-port or 6-port Interface Modules with 10/100BaseT(X), 100BaseFX (SC/ST connector), or 100Base SFP <sup>1</sup>  |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

#### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, NTP authentication, Port Lock, RADIUS, SSH, TACACS+  |
| Time Management      | SNTP   |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET  |
| MIB                  | Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 12 Mbits      |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

#### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

#### Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

1. See the IM-6700A datasheet for Fast Ethernet module product information.

## Power Parameters

|                             |   |
|-----------------------------|---|
| Input Voltage               | IKS-6726A-2GTXSFP-24-T: 24 VDC<br>IKS-6726A-2GTXSFP-24-24-T: 24 VDC (redundant dual inputs)<br>IKS-6726A-2GTXSFP-48-T: 48 VDC<br>IKS-6726A-2GTXSFP-48-48-T: 48 VDC (redundant dual inputs)<br>IKS-6726A-2GTXSFP-HV-T: 110/220 VAC<br>IKS-6726A-2GTXSFP-HV-HV-T: 110/220 VAC (redundant dual inputs) |
| Operating Voltage           | IKS-6726A-2GTXSFP-HV-T: 85 to 264 VAC<br>IKS-6726A-2GTXSFP-HV-HV-T: 85 to 264 VAC<br>IKS-6726A-2GTXSFP-24-T: 18 to 36 VDC<br>IKS-6726A-2GTXSFP-24-24-T: 18 to 36 VDC<br>IKS-6726A-2GTXSFP-48-T: 36 to 72 VDC<br>IKS-6726A-2GTXSFP-48-48-T: 36 to 72 VDC   |
| Overload Current Protection | Supported   |
| Reverse Polarity Protection | Supported   |
| Input Current               | IKS-6726A-2GTXSFP-24-T/2GTXSFP-24-24-T: 0.36 A @ 24 VDC<br>IKS-6726A-2GTXSFP-48-T/2GTXSFP-48-48-T: 0.19 A @ 48 VDC<br>IKS-6726A-2GTXSFP-HV-T/2GTXSFP-HV-HV-T: 0.28/0.14 A @ 110/220 VAC   |

## Physical Characteristics

|              |   |
|--------------|---|
| IP Rating    | IP30  |
| Dimensions   | 440 x 44 x 280 mm (17.32 x 1.37 x 11.02 in) |
| Weight       | 4100 g (9.05 lb)                            |
| Installation | Rack mounting                               |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | EN 60950-1, UL 60950-1   |
| EMC       | EN 55032/24  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Railway   | EN 50121-4   |
| Maritime  | ABS, DNV-GL, LR, NK  |
| Freefall  | IEC 60068-2-32   |
| Shock     | IEC 60068-2-27   |
| Vibration | IEC 60068-2-6  |



## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 149,151 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x IKS-6726A Series switch  |
| Cable            | 1 x USB type A male to USB type B male   |
| Installation Kit | 2 x rack-mounting ear<br>6 x cap, plastic, for SFP slot  |
| Power Supply     | IKS-6726A-2GTXSFP-HV-T: 1 x power cord, EU type<br>IKS-6726A-2GTXSFP-HV-HV-T: 2 x power cord, EU type<br>IKS-6726A-2GTXSFP-HV-T: 1 x power cord, US type<br>IKS-6726A-2GTXSFP-HV-HV-T: 2 x power cord, US type |
| Documentation    | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card  |
| Note             | SFP modules and/or modules from the IM-6700A Module Series need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

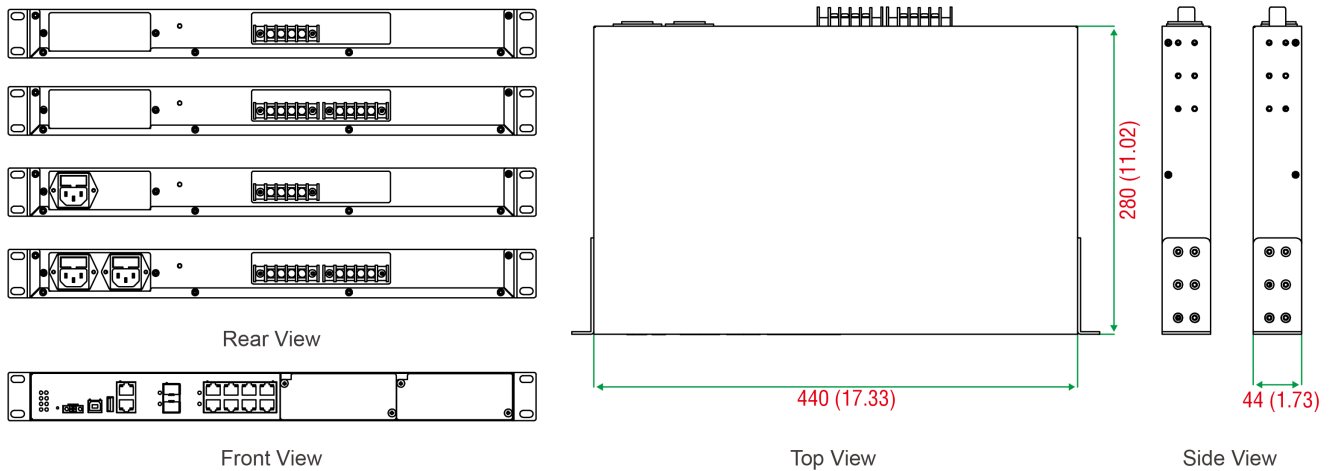

## Ordering Information

| Model Name                | Combo Ports<br>(10/100/1000BaseT(X) or<br>100/1000BaseSFP) | 100BaseSFP<br>Slots | 10/100BaseT(X)<br>Ports<br>RJ45 Connector | 100BaseFX<br>Ports | Operating<br>Temp. | Input Voltage            | Redundant<br>Dual Input |
|---------------------------|--|---------------------|---|--------------------|--------------------|--------------------------|-------------------------|
| IKS-6726A-2GTXSFP-HV-T    | 2  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 110/220 VAC power supply | -                       |
| IKS-6726A-2GTXSFP-HV-HV-T | 2  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 110/220 VAC power supply | ✓                       |
| IKS-6726A-2GTXSFP-24-T    | 2  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 24 VDC power supply      | -                       |

| Model Name                    | Combo Ports<br>(10/100/1000BaseT(X) or<br>100/1000BaseSFP) | 100BaseSFP<br>Slots | 10/100BaseT(X)<br>Ports<br>RJ45 Connector | 100BaseFX<br>Ports | Operating<br>Temp. | Input Voltage          | Redundant<br>Dual Input |
|-------------------------------|--|---------------------|---|--------------------|--------------------|------------------------|-------------------------|
| IKS-6726A-<br>2GTXSFP-24-24-T | 2  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 24 VDC power<br>supply | ✓                       |
| IKS-6726A-<br>2GTXSFP-48-T    | 2  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 48 VDC power<br>supply | –                       |
| IKS-6726A-<br>2GTXSFP-48-48-T | 2  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 48 VDC power<br>supply | ✓                       |

## Accessories (sold separately)

### IM-6700A Module Series

|                  |   |
|------------------|---|
| IM-6700A-2MSC4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with SC connectors and 4 10/100BaseT(X) ports  |
| IM-6700A-2MST4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with ST connectors and 4 10/100BaseT(X) ports  |
| IM-6700A-2SSC4TX | Fast Ethernet module with 2 single-mode 100BaseFX ports with SC connectors and 4 10/100BaseT(X) ports |
| IM-6700A-4MSC2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with SC connectors and 2 10/100BaseT(X) ports  |
| IM-6700A-4MST2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with ST connectors and 2 10/100BaseT(X) ports  |
| IM-6700A-4SSC2TX | Fast Ethernet module with 4 single-mode 100BaseFX ports with SC connectors and 2 10/100BaseT(X) ports |
| IM-6700A-6MSC    | Fast Ethernet module with 6 multi-mode 100BaseFX ports with SC connectors                             |
| IM-6700A-6MST    | Fast Ethernet module with 6 multi-mode 100BaseFX ports with ST connectors                             |
| IM-6700A-6SSC    | Fast Ethernet module with 6 single-mode 100BaseFX ports with SC connectors                            |
| IM-6700A-8PoE    | Fast Ethernet PoE+ module with 8 100BaseT(X) PoE/PoE+ ports (for IKS-6728A-8PoE Series only)          |
| IM-6700A-8SFP    | Fast Ethernet module with 8 100BaseSFP slots  |
| IM-6700A-8TX     | Fast Ethernet module with 8 10/100T(X) ports  |

### Storage Kits

|            |   |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

### SFP Modules

|               |  |
|---------------|--|
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |

|                 |  |
|-----------------|--|
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

#### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

## Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# IKS-6728A Series

## 24+4G-port Gigabit modular managed PoE+ Ethernet switches



### Features and Benefits

- 8 built-in PoE+ ports compliant with IEEE 802.3af/at (IKS-6728A-8PoE)
- Up to 36 W output per PoE+ port (IKS-6728A-8PoE)
- 1 kV LAN surge protection for extreme outdoor environments
- PoE diagnostics for powered-device mode analysis
- 4 Gigabit combo ports for high-bandwidth communication
- -40 to 75°C operating temperature range at 720 W full loading
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

The IKS-6728A Series is designed to meet the demands of mission-critical applications for business and industry. The IKS-6728A and IKS-6728A-8PoE come with up to 24 10/100BaseT(X), or PoE/PoE+, and 4 combo Gigabit Ethernet ports. The IKS-6728A-8PoE Ethernet switches provide up to 30 watts of power per PoE+ port in standard mode, and also support high-power output of up to 36 watts for heavy-duty industrial PoE devices, such as weather-proof IP surveillance cameras with wipers/heaters, high-performance wireless access points, and rugged IP phones.

IKS-6728A-8PoE Ethernet switches support two types of power input sources: 48 VDC for PoE+ ports and system power, and 110/220 VAC for system power. These Ethernet switches also support a variety of management functions, including STP/RSTP, Turbo Ring, Turbo Chain, PoE power management, PoE device auto-checking, PoE power scheduling, PoE diagnostic, IGMP, VLAN, QoS, RMON, bandwidth management, and port mirroring. The IKS-6728A-8PoE is designed especially for harsh outdoor applications with 3kV surge protection to ensure the uninterrupted reliability of PoE systems.

### Additional Features and Benefits

- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management prevents unpredictable network status with "Lock port" to restrict access to authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery
- Configurable by web browser, Telnet/serial console, CLI, Windows utility, and ABC-02-USB automatic backup configurator

## Specifications

### Input/Output Interface

|  |   |
|--|---|
| Alarm Contact Channels                               | 1 relay output with current carrying capacity of 1 A @ 24 VDC |
| <b>Ethernet Interface</b>                            |   |
| 10/100BaseT(X) Ports (RJ45 connector)                | 8   |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP) | 4   |

|           |   |
|-----------|---|
| Module    | 2 modular slots for any 8-port or 6-port Interface Modules with 10/100BaseT(X), 100BaseFX (SC/ST connector), 100Base PoE/PoE+, or 100Base SFP <sup>1</sup>  |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

#### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, Flow control, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3  |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, NTP authentication, Port Lock, RADIUS, SSH, TACACS+  |
| Time Management      | NTP Server/Client, SNTP  |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET  |
| MIB                  | Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 2048          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 12 Mbits      |
| Priority Queues    | 4             |
| VLAN ID Range      | VID 1 to 4094 |

#### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

#### Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

1. See the IM-6700A datasheet for Fast Ethernet module product information.

## Power Parameters

|                             |  |
|-----------------------------|--|
| Input Voltage               | <p>IKS-6728A-4GTXSFP-24-T: 24 VDC<br/>           IKS-6728A-4GTXSFP-24-24-T: 24 VDC (redundant dual inputs)<br/>           IKS-6728A-4GTXSFP-48-T: 48 VDC<br/>           IKS-6728A-4GTXSFP-48-48-T: 48 VDC (redundant dual inputs)<br/>           IKS-6728A-4GTXSFP-HV-T: 110/220 VAC<br/>           IKS-6728A-4GTXSFP-HV-HV-T: 110/220 VAC (redundant dual inputs)<br/>           IKS-6728A-8PoE-4GTXSFP-48-T: 48 VDC<br/>           IKS-6728A-8PoE-4GTXSFP-48-48-T: 48 VDC (redundant dual inputs)<br/>           IKS-6728A-8PoE-4GTXSFP-HV-T: 110/220 VAC<br/>           IKS-6728A-8PoE-4GTXSFP-HV-HV-T: 110/220 VAC (redundant dual inputs)</p> |
| Operating Voltage           | <p>IKS-6728A-4GTXSFP-HV-T: 85 to 264 VAC<br/>           IKS-6728A-4GTXSFP-HV-HV-T: 85 to 264 VAC<br/>           IKS-6728A-4GTXSFP-24-T: 18 to 36 VDC<br/>           IKS-6728A-4GTXSFP-24-24-T: 18 to 36 VDC<br/>           IKS-6728A-4GTXSFP-48-T: 36 to 72 VDC<br/>           IKS-6728A-4GTXSFP-48-48-T: 36 to 72 VDC<br/>           IKS-6728A-8PoE-4GTXSFP-48-T: 36 to 72 VDC<br/>           IKS-6728A-8PoE-4GTXSFP-48-48-T: 36 to 72 VDC<br/>           IKS-6728A-8PoE-4GTXSFP-HV-T: 85 to 264 VAC<br/>           IKS-6728A-8PoE-4GTXSFP-HV-HV-T: 85 to 264 VAC</p>   |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |
| Input Current               | <p>IKS-6728A-4GTXSFP-24-T/4GTXSFP-24-24-T: 0.36 A @ 24 VDC<br/>           IKS-6728A-4GTXSFP-48-T/4GTXSFP-48-48-T: 0.19 A @ 48 VDC<br/>           IKS-6728A-8PoE-4GTXSFP-48-T/8PoE-4GTXSFP-48-48-T: 0.53 A @ 48 VDC<br/>           IKS-6728A-4GTXSFP-HV-T/4GTXSFP-HV-HV-T: 0.28/0.14 A @ 110/220 VAC<br/>           IKS-6728A-8PoE-4GTXSFP-HV-T/8PoE-4GTXSFP-HV-HV-T: 0.33/0.24 A @ 110/220 VAC</p>   |

## Physical Characteristics

|              |   |
|--------------|---|
| IP Rating    | IP30  |
| Dimensions   | 440 x 44 x 280 mm (17.32 x 1.37 x 11.02 in) |
| Weight       | 4100 g (9.05 lb)                            |
| Installation | Rack mounting                               |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |


## Standards and Certifications

|          |   |
|----------|---|
| Freefall | IEC 60068-2-32  |
| EMC      | EN 55032/24   |
| EMI      | CISPR 32, FCC Part 15B Class A  |
| EMS      | <p>IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br/>           IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br/>           IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br/>           IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br/>           IEC 61000-4-6 CS: 10 V<br/>           IEC 61000-4-8 PFMF</p> |
| Railway  | EN 50121-4  |
| Maritime | IKS-6728A Series non-PoE models: ABS, CCS, DNV-GL, LR, NK   |
| Safety   | EN 60950-1, UL 60950-1  |

|                         |  |
|-------------------------|--|
| Shock                   | IEC 60068-2-27   |
| Vibration               | IEC 60068-2-6  |
| <b>MTBF</b>             |  |
| Time                    | 120,731 hrs  |
| Standards               | Telcordia (Bellcore), GB   |
| <b>Warranty</b>         |  |
| Warranty Period         | 5 years  |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |
| <b>Package Contents</b> |  |
| Device                  | 1 x IKS-6728A Series switch  |
| Cable                   | 1 x USB type A male to USB type B male   |
| Installation Kit        | 2 x rack-mounting ear<br>8 x cap, plastic, for SFP slot  |
| Power Supply            | IKS-6728A-4GTXSFP-HV-T: 1 x power cord, EU type<br>IKS-6728A-4GTXSFP-HV-HV-T: 2 x power cord, EU type<br>IKS-6728A-8PoE-4GTXSFP-HV-T: 1 x power cord, EU type<br>IKS-6728A-8PoE-4GTXSFP-HV-HV-T: 2 x power cord, EU type<br>IKS-6728A-4GTXSFP-HV-T: 1 x power cord, US type<br>IKS-6728A-4GTXSFP-HV-HV-T: 2 x power cord, US type<br>IKS-6728A-8PoE-4GTXSFP-HV-T: 1 x power cord, US type<br>IKS-6728A-8PoE-4GTXSFP-HV-HV-T: 2 x power cord, US type |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card  |
| Note                    | 1. If you want to turn on PoE, please add a 48 V external power supply.<br>2. 48 V external power supply, SFP modules and/or modules from the IM-6700A Module Series need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

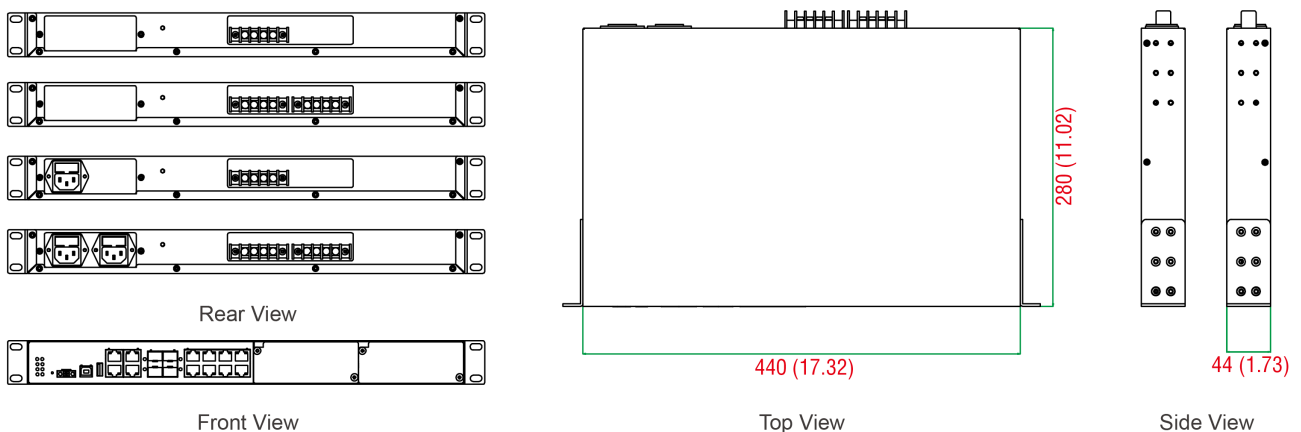



## Ordering Information

| Model Name                     | Combo Ports<br>(10/100/<br>1000BaseT(X) or<br>100/1000BaseSFP) | 100BaseSFP<br>Slots | 10/100BaseT(X)<br>Ports<br>RJ45 Connector | 100BaseFX<br>Ports | Operating<br>Temp. | Input Voltage            | Redundant<br>Dual Input | PoE<br>Support     |
|--------------------------------|--|---------------------|---|--------------------|--------------------|--------------------------|-------------------------|--------------------|
| IKS-6728A-4GTXSFP-HV-T         | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 110/220 VAC power supply | -                       | -                  |
| IKS-6728A-4GTXSFP-HV-HV-T      | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 110/220 VAC power supply | ✓                       | -                  |
| IKS-6728A-4GTXSFP-24-T         | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 24 VDC power supply      | -                       | -                  |
| IKS-6728A-4GTXSFP-24-24-T      | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 24 VDC power supply      | ✓                       | -                  |
| IKS-6728A-4GTXSFP-48-T         | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 48 VDC power supply      | -                       | -                  |
| IKS-6728A-4GTXSFP-48-48-T      | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 48 VDC power supply      | ✓                       | -                  |
| IKS-6728A-8PoE-4GTXSFP-HV-T    | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 110/220 VAC power supply | -                       | Up to 24 PoE ports |
| IKS-6728A-8PoE-4GTXSFP-HV-HV-T | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 110/220 VAC power supply | ✓                       | Up to 24 PoE ports |
| IKS-6728A-8PoE-4GTXSFP-48-T    | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 48 VDC power supply      | -                       | Up to 24 PoE ports |
| IKS-6728A-8PoE-4GTXSFP-48-48-T | 4  | Up to 18            | Up to 24                                  | Up to 12           | -45 to 75°C        | 48 VDC power supply      | ✓                       | Up to 24 PoE ports |

## Accessories (sold separately)

### IM-6700A Module Series

|                  |   |
|------------------|---|
| IM-6700A-2MSC4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with SC connectors and 4 10/100BaseT(X) ports  |
| IM-6700A-2MST4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with ST connectors and 4 10/100BaseT(X) ports  |
| IM-6700A-2SSC4TX | Fast Ethernet module with 2 single-mode 100BaseFX ports with SC connectors and 4 10/100BaseT(X) ports |
| IM-6700A-4MSC2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with SC connectors and 2 10/100BaseT(X) ports  |
| IM-6700A-4MST2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with ST connectors and 2 10/100BaseT(X) ports  |
| IM-6700A-4SSC2TX | Fast Ethernet module with 4 single-mode 100BaseFX ports with SC connectors and 2 10/100BaseT(X) ports |
| IM-6700A-6MSC    | Fast Ethernet module with 6 multi-mode 100BaseFX ports with SC connectors                             |
| IM-6700A-6MST    | Fast Ethernet module with 6 multi-mode 100BaseFX ports with ST connectors                             |
| IM-6700A-6SSC    | Fast Ethernet module with 6 single-mode 100BaseFX ports with SC connectors                            |
| IM-6700A-8PoE    | Fast Ethernet PoE+ module with 8 100BaseT(X) PoE/PoE+ ports (for IKS-6728A-8PoE Series only)          |
| IM-6700A-8SFP    | Fast Ethernet module with 8 100BaseSFP slots  |
| IM-6700A-8TX     | Fast Ethernet module with 8 10/100T(X) ports  |

### Storage Kits

|            |   |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |

|              |   |
|--------------|---|
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
|--------------|---|

#### Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# IKS-G6524A Series

## 24G-port Layer 2 full Gigabit managed Ethernet switches



### Features and Benefits

- 24 Gigabit Ethernet ports
- Up to 24 optical fiber connections (SFP slots)
- Fanless, -40 to 75°C operating temperature range (T models)
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

### Certifications



## Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The IKS-G6524A Series is equipped with 24 Gigabit Ethernet ports.

The IKS-G6524A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and are fanless and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- IGMP snooping and GMRP for filtering multicast traffic

## Specifications

### Input/Output Interface

|  |  |
|--|--|
| Alarm Contact Channels                     | Relay output with current carrying capacity of 2 A @ 30 VDC                            |
| Digital Inputs                             | +13 to +30 V for state 1<br>-30 to +1 V for state 0<br>Max. input current: 8 mA        |
| <b>Ethernet Interface</b>                  |  |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | IKS-G6524A-4GTXSFP-HV-HV Series: 20<br>IKS-G6524A-8GSFP-4GTXSFP-HV-HV Series: 12       |
| 100/1000BaseSFP Ports                      | IKS-G6524A-8GSFP-4GTXSFP-HV-HV Series: 8<br>IKS-G6524A-20GSFP-4GTXSFP-HV-HV Series: 20 |

|   |   |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4   |
| Standards   | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

#### Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4/IPv6, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON   |
| Security             | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+   |
| Time Management      | NTP Server/Client, SNTP   |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET   |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |

#### Switch Properties

|                    |               |
|--------------------|---------------|
| DRAM               | 128 MB        |
| Flash              | 16 MB         |
| IGMP Groups        | 4096          |
| Jumbo Frame Size   | 9.6 KB        |
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| Packet Buffer Size | 12 Mbits      |
| VLAN ID Range      | VID 1 to 4094 |
| Priority Queues    | 8             |

#### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

#### Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

#### Power Parameters


|                   |                                       |
|-------------------|---------------------------------------|
| Input Voltage     | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC                         |

|  |  |
|--|--|
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| Input Current                          | 0.67/0.38 A @ 110/220 VAC  |
| <b>Physical Characteristics</b>        |  |
| IP Rating                              | IP30   |
| Dimensions                             | 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in)  |
| Weight                                 | 5100 g (11.25 lb)  |
| Installation                           | Rack mounting  |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | Standard Models: -10 to 60°C (14 to 140°F)<br>Wide Temp. Models: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 75°C (-40 to 167°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| Safety                                 | EN 60950-1, UL 60950-1   |
| EMC                                    | EN 55032/24  |
| EMI                                    | CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF       |
| Railway                                | EN 50121-4   |
| Freefall                               | IEC 60068-2-32   |
| Shock                                  | IEC 60068-2-27   |
| Vibration                              | IEC 60068-2-6  |
| <b>MTBF</b>                            |  |
| Time                                   | 460,854 hrs  |
| Standards                              | Telcordia (Bellcore), GB   |
| <b>Warranty</b>                        |  |
| Warranty Period                        | 5 years  |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>   |
| <b>Package Contents</b>                |  |
| Device                                 | 1 x IKS-G6524A Series switch   |
| Cable                                  | 1 x USB type A male to USB type B male   |
| Installation Kit                       | 2 x rack-mounting ear<br>8 x cap, plastic, for SFP slot (IKS-G6524A-4GTXSFP-HV-HV Series)<br>16 x cap, plastic, for SFP slot (IKS-G6524A-8GSFP-4GTXSFP-HV-HV Series)<br>28 x cap, plastic, for SFP slot (IKS-G6524A-20GSFP-4GTXSFP-HV-HV Series) |

|               |  |
|---------------|--|
| Power Supply  | 1 x power cord, EU type<br>1 x power cord, US type                     |
| Documentation | 1 x document and software CD<br>1 x warranty card                      |
| Note          | SFP modules need to be purchased separately for use with this product. |

## Dimensions

Unit: mm (inch)

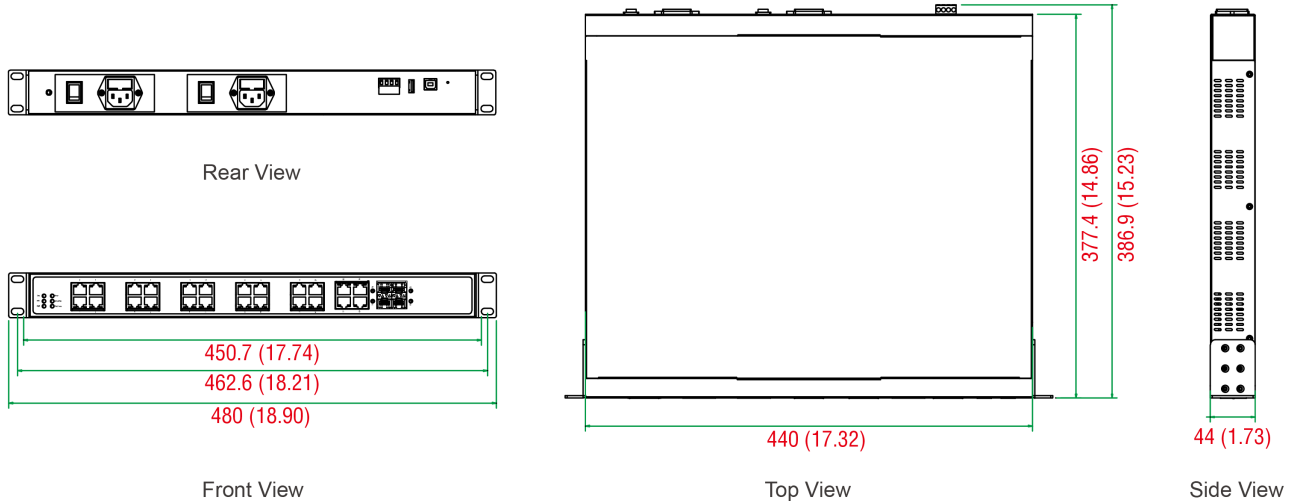

## Ordering Information

| Model Name                        | Layer | Combo Ports<br>10/100/1000BaseT(X)<br>or 100/1000BaseSFP+ | 100/1000Base SFP<br>Slots | 10/100/1000BaseT(X)<br>Ports<br>RJ45 Connector | Operating Temp. |
|-----------------------------------|-------|---|---------------------------|--|-----------------|
| IKS-G6524A-4GTXSFP-HV-HV          | 2     | 4   | -                         | 20   | -10 to 60°C     |
| IKS-G6524A-8GSFP-4GTXSFP-HV-HV    | 2     | 4   | 8                         | 12   | -10 to 60°C     |
| IKS-G6524A-20GSFP-4GTXSFP-HV-HV   | 2     | 4   | 20                        | -  | -10 to 60°C     |
| IKS-G6524A-4GTXSFP-HV-HV-T        | 2     | 4   | -                         | 20   | -40 to 75°C     |
| IKS-G6524A-8GSFP-4GTXSFP-HV-HV-T  | 2     | 4   | 8                         | 12   | -40 to 75°C     |
| IKS-G6524A-20GSFP-4GTXSFP-HV-HV-T | 2     | 4   | 20                        | -  | -40 to 75°C     |

## Accessories (sold separately)

### Storage Kits

|            |   |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature   |

|                 |  |
|-----------------|--|
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZSLC     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZSLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHSLC     | SFP module with 1 1000BaseLH port with LC connector for 40 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHSLC-T   | SFP module with 1 1000BaseLH port with LC connector for 40 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLSLC      | SFP module with 1 1000BaseLS port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSLC-T    | SFP module with 1 1000BaseLS port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1GTXRJ45-T  | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |



## Power Cords

|                  |   |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m                    |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m             |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m            |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m                |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m                 |
| PWC-C7AU-2B-183  | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m         |
| PWC-C7EU-2B-183  | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183  | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m     |
| PWC-C7US-2B-183  | Power cord with United States (US) plug, 10A/125V, 1.83 m       |

## Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# IM-6700A Module Series

Fast Ethernet modules for IKS-6726A-2GTXSFP/6728A-4GTXSFP/6728A-8PoE-4GTXSFP modular managed switches

## Features and Benefits

- Modular design lets you choose from a variety of media combinations



## Introduction

IM-6700A fast Ethernet modules are designed for the modular, managed, rack-mountable IKS-6700A Series switches. Each slot of an IKS-6700A switch can accommodate up to 8 ports, with each port supporting the TX, MSC, SSC, and MST media types. As an added plus, the IM-6700A-8PoE module is designed to give IKS-6728A-8PoE Series switches PoE capability. The modular design of the IKS-6700A Series ensures that the switches meet multiple application requirements.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 100BaseFX Ports (multi-mode SC connector)  | IM-6700A-2MSC4TX: 2<br>IM-6700A-4MSC2TX: 4<br>IM-6700A-6MSC: 6  |
| 100BaseFX Ports (multi-mode ST connector)  | IM-6700A-2MST4TX: 2<br>IM-6700A-4MST2TX: 4<br>IM-6700A-6MST: 6  |
| 100BaseFX Ports (single-mode SC connector) | IM-6700A-2SSC4TX: 2<br>IM-6700A-4SSC2TX: 4<br>IM-6700A-6SSC: 6  |
| 100BaseSFP Slots                           | IM-6700A-8SFP: 8  |
| 10/100BaseT(X) Ports (RJ45 connector)      | IM-6700A-4MSC2TX/4MST2TX/4SSC2TX: 2<br>IM-6700A-2MSC4TX/2MST4TX/2SSC4TX: 4<br>IM-6700A-8TX: 8<br><br>Supported functions:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| PoE Ports (10/100BaseT(X), RJ45 connector) | IM-6700A-8PoE: Auto negotiation speed, Full/Half duplex mode  |

|   |  |                  |                |              |              |
|---|--|------------------|----------------|--------------|--------------|
| Standards   | IM-6700A-8PoE: IEEE 802.3af/at for PoE/PoE+ output |                  |                |              |              |
| Optical Fiber   |  |                  | 100BaseFX      |              |              |
|   |  |                  | Multi-Mode     | Single-Mode  |              |
|   | Fiber Cable Type                                   | OM1              | 50/125 $\mu$ m | G.652        |              |
|   |  |                  | 800 MHz x km   |              |              |
|   | Typical Distance                                   |                  | 4 km           | 5 km         | 40 km        |
|   | Wavelength   | Typical (nm)     |                | 1300         | 1310         |
|   |  | TX Range (nm)    |                | 1260 to 1360 | 1280 to 1340 |
|   |  | RX Range (nm)    |                | 1100 to 1600 | 1100 to 1600 |
|   | Optical Power                                      | TX Range (dBm)   |                | -10 to -20   | 0 to -5      |
|   |  | RX Range (dBm)   |                | -3 to -32    | -3 to -34    |
|   |  | Link Budget (dB) |                | 12           | 29           |
| Dispersion Penalty (dB)   |  | 3                | 1              |              |              |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |  |                  |                |              |              |

#### Power Parameters

|                   |  |
|-------------------|--|
| Power Consumption | IM-6700A-8TX/8PoE: 1.21 W (max.)<br>IM-6700A-8SFP: 0.92 W (max.)<br>IM-6700A-2MSC4TX/2MST4TX/2SSC4TX: 3.19 W (max.)<br>IM-6700A-6MST/6SSC/6MSC: 7.57 W (max.)<br>IM-6700A-4SSC2TX/4MSC2TX/4MST2TX: 5.28 W (max.) |
|-------------------|--|

#### Physical Characteristics

|        |  |
|--------|--|
| Weight | IM-6700A-8TX: 225 g (0.50 lb)<br>IM-6700A-8SFP: 295 g (0.65 lb)<br>IM-6700A-2MSC4TX/2MST4TX/2SSC4TX/4MSC2TX/4MST2TX/4SSC2TX: 270 g (0.60 lb)<br>IM-6700A-6MSC/6SSC/6MSC: 390 g (0.86 lb)<br>IM-6700A-8PoE: 260 g (0.58 lb) |
|--------|--|

#### MTBF

|      |   |
|------|---|
| Time | IM-6700A-2MSC4TX/2MST4TX/2SSC4TX: 1,031,180 hrs<br>IM-6700A-4MSC2TX: 530,268 hrs<br>IM-6700A-4MST2TX: 537,942 hrs<br>IM-6700A-4SSC2TX: 4,359,518 hrs<br>IM-6700A-6MSC: 366,119 hrs<br>IM-6700A-6MST/6SSC: 365,741 hrs<br>IM-6700A-8PoE: 338,800 hrs<br>IM-6700A-8SFP: 3,510,110 hrs<br>IM-6700A-8TX: 10,412,400 hrs |
|------|---|

|           |                          |
|-----------|--------------------------|
| Standards | Telcordia (Bellcore), GB |
|-----------|--------------------------|

#### Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

#### Package Contents


|               |                                   |
|---------------|-----------------------------------|
| Device        | 1 x IM-6700A Module Series module |
| Documentation | 1 x warranty card                 |

## Dimensions


Unit: mm (inch)



Top View



Side View



Front View

## Ordering Information

| Model Name       | 10/100BaseT(X) Ports | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | 100Base SFP Ports |
|------------------|----------------------|--|--|---|-------------------|
| IM-6700A-2MSC4TX | 4                    | 2  | -  | -   | -                 |
| IM-6700A-2MST4TX | 4                    | -  | 2  | -   | -                 |
| IM-6700A-2SSC4TX | 4                    | -  | -  | 2   | -                 |
| IM-6700A-4MSC2TX | 2                    | 4  | -  | -   | -                 |
| IM-6700A-4MST2TX | 2                    | -  | 4  | -   | -                 |
| IM-6700A-4SSC2TX | 2                    | -  | -  | 4   | -                 |
| IM-6700A-6MSC    | -                    | 6  | -  | -   | -                 |
| IM-6700A-6MST    | -                    | -  | 6  | -   | -                 |
| IM-6700A-6SSC    | -                    | -  | -  | 6   | -                 |
| IM-6700A-8PoE    | 8 (PoE+ ports)       | -  | -  | -   | -                 |
| IM-6700A-8SFP    | -                    | -  | -  | -   | 8                 |
| IM-6700A-8TX     | 8                    | -  | -  | -   | -                 |

## Accessories (sold separately)

### SFP Modules


|              |   |
|--------------|---|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature   |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# IM-G7000A Module Series

4G-port Gigabit Ethernet interface modules for ICS-G7700A/G7800A modular managed Ethernet switches

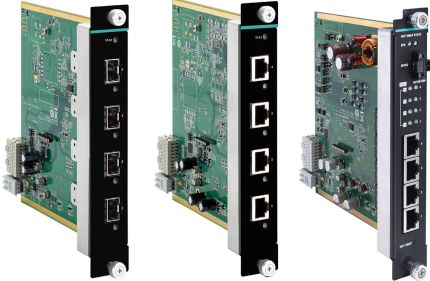

## Features and Benefits

- Full Gigabit Ethernet ports
- IEEE 802.3af/at, PoE+ standards (PoE model)

## Introduction

The IM-G7000A Module Series includes 4G-port Ethernet interface modules designed for ICS-G7748A, ICS-G7750A, ICS-G7752A, ICS-G7848A, ICS-G7850A, and ICS-G7852A modular managed switches. In particular, the IM-G7000A-4PoEA module is a PoE-enabled interface module that centralizes the power supply and provides up to 36 watts of power per port, reducing the effort required to provide power to connected devices.

## Specifications

### Ethernet Interface

|   |  |
|---|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector)      | IM-G7000A-4GTX: 4<br>IM-G7000A-4GTX: Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection      |
| 100/1000BaseSFP Ports                           | IM-G7000A-4GSFP: 4   |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector) | IM-G7000A-4PoE: 4, Compliant with IEEE 802.3af/at high power mode up to 36 W<br>IM-G7000A-4PoE: Auto negotiation speed |

### LED Interface

|                |   |
|----------------|---|
| LED Indicators | State, Hot-swap, 10/100/1000 for TP port, 100/1000 for fiber port, PoE and EPS for PoE module |
|----------------|---|

### Power Parameters

|                   |  |
|-------------------|--|
| Power Consumption | IM-G7000A-4GSFP: 1.32 W (max.)<br>IM-G7000A-4GTX: 3.47 W (max.)<br>IM-G7000A-4PoE: 5.14 W (max.) |
|-------------------|--|

### Physical Characteristics


|            |   |
|------------|---|
| Dimensions | 28.8 x 174.7 x 166.8 mm (1.13 x 6.88 x 6.57 in) |
| Weight     | 220 g (0.49 lb)                                 |

## MTBF

|                         |  |
|-------------------------|--|
| Time                    | IM-G7000A-4GTX: 1,569,520 hrs<br>IM-G7000A-4GSFP: 1,544,084 hrs<br>IM-G7000A-4PoE: 394,348 hrs |
| Standards               | Telcordia (Bellcore), GB   |
| <b>Warranty</b>         |  |
| Warranty Period         | 5 years  |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>                           |
| <b>Package Contents</b> |  |
| Device                  | 1 x IM-G7000A Series module  |
| Documentation           | 1 x warranty card  |

## Dimensions

Unit: mm (inch)

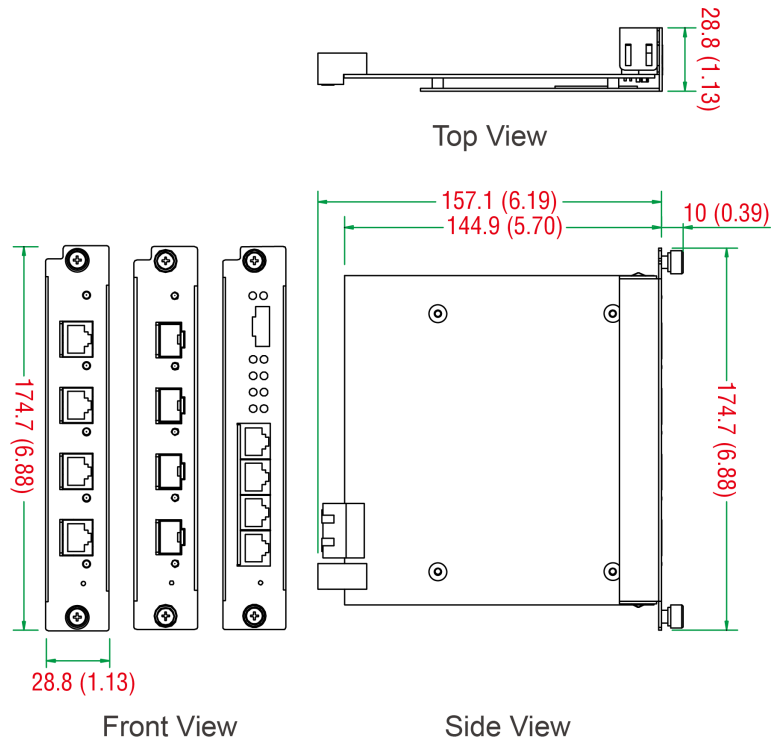

## Ordering Information

| Model Name      | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | 100/1000Base SFP Slots | PoE Ports<br>10/100/1000BaseT(X), RJ45<br>Connector | Operating Temp. |
|-----------------|---|------------------------|---|-----------------|
| IM-G7000A-4GTX  | 4   | -                      | -   | -10 to 60°C     |
| IM-G7000A-4GSFP | -   | 4                      | -   | -10 to 60°C     |
| IM-G7000A-4PoE  | -   | -                      | 4   | -10 to 60°C     |

## Accessories (sold separately)

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T  | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC    | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |



|                |   |
|----------------|---|
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# IM Module Series

2-port Gigabit Ethernet and 4-port Fast Ethernet modules for the EDS-728/828 Series



## Features and Benefits

- Modular design lets you choose from a variety of media combinations
- Modular design makes port expansion easy

## Certifications



## Introduction

The IM Module Series has been designed for Moxa's EDS-728 Series and EDS-828 Series modular switches. The IM Module Series includes 6 Fast Ethernet modules, each with 4 ports supporting the TX, MSC, SSC, and MST media types. In addition, the IM Module Series includes 2 Gigabit Ethernet modules, one with 2 copper ports, and one with 2 fiber ports. Multiple modules can be used with the EDS-728 and EDS-828 switches, allowing each switch to support up to 24 Fast Ethernet ports and 4 Gigabit Ethernet ports.

## Specifications

### Ethernet Interface

|  |   |
|--|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | IM-2GTX: 2, Auto negotiation speed, Auto MDI/MDI-X connection   |
| 1000BaseSFP Slots                          | IM-2GSFP: 2   |
| 10/100BaseT(X) Ports (RJ45 connector)      | IM-2MSC/2TX, IM-2MST/2TX, IM-2SSC/2TX: 2<br>IM-1LSC/3TX: 3, IM-4TX: 4<br><br>Supported functions:<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector)  | IM-2MSC/2TX: 2<br>IM-4MSC: 4  |
| 100BaseFX Ports (multi-mode ST connector)  | IM-2MST/2TX: 2<br>IM-4MST: 4  |
| 100BaseFX Ports (single-mode SC connector) | IM-2SSC/2TX: 2<br>IM-4SSC: 4  |

|  |   |                         |            |              |       |
|--|---|-------------------------|------------|--------------|-------|
| 100BaseFX Ports, Single-Mode SC Connector, 80 km | IM-1LSC/3TX: 1  |                         |            |              |       |
| Optical Fiber                                    |   |                         | 100BaseFX  |              |       |
|  |   |                         | Multi-Mode | Single-Mode  |       |
|  | Fiber Cable Type  |                         | OM1        | 50/125 μm    | G.652 |
|  |   |                         |            | 800 MHz x km |       |
|  | Typical Distance  |                         | 4 km       | 5 km         | 40 km |
|  | Wavelength  | Typical (nm)            |            | 1300         |       |
|  |   | TX Range (nm)           |            | 1260 to 1360 |       |
|  |   | RX Range (nm)           |            | 1100 to 1600 |       |
|  | Optical Power   | TX Range (dBm)          |            | -10 to -20   |       |
|  |   | RX Range (dBm)          |            | -3 to -32    |       |
|  |   | Link Budget (dB)        |            | 12           |       |
|  |   | Dispersion Penalty (dB) |            | 3            |       |
|  | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |            |              |       |

|                      |  |
|----------------------|--|
| <b>LED Interface</b> |  |
| LED Indicators       | Fast Ethernet Modules: PWR, P1, P2, P3, P4 port status<br>Gigabit Modules: Port status |

|                         |   |
|-------------------------|---|
| <b>Power Parameters</b> |   |
| Power Consumption       | IM-1LSC/3TX: 2.12 W (max.)<br>IM-2GSFP: 2.96 W (max.)<br>IM-2GTX: 3.04 W (max.)<br>IM-2MSC/2TX, IM-2MST/2TX, IM-2SSC/2TX: 2.06 W (max.)<br>IM-4MSC, IM-4MST, IM-4SSC: 6.6 W (max.)<br>IM-4TX: 1.29 W (max.) |

|                                 |  |
|---------------------------------|--|
| <b>Physical Characteristics</b> |  |
| Housing                         | IP30   |
| Dimensions                      | Fast Ethernet Modules: 40 x 127.8 x 100 mm (1.57 x 5.03 x 3.94 in)<br>Gigabit Modules: 24 x 65.9 x 101.1 mm (0.94 x 2.59 x 3.98 in)  |
| Weight                          | IM-1LSC/3TX: 235 g (0.52 lb)<br>IM-2GSFP: 150 g (0.33 lb)<br>IM-2GTX: 148 g (0.33 lb)<br>IM-2MSC/2TX, IM-2SSC/2TX: 245 g (0.54 lb)<br>IM-2MST/2TX, IM-4MSC: 250 g (0.56 lb)<br>IM-4MST, IM-4SSC: 270 g (0.6 lb)<br>IM-4TX: 215 g (0.48 lb) |

|             |                          |
|-------------|--------------------------|
| <b>MTBF</b> |                          |
| Standards   | Telcordia (Bellcore), GB |

|                 |  |
|-----------------|--|
| <b>Warranty</b> |  |
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|               |                             |
|---------------|-----------------------------|
| Device        | 1 x IM Module Series module |
| Documentation | 1 x warranty card           |

## Dimensions


### Fast Ethernet Interface Modules

Unit: mm (inch)

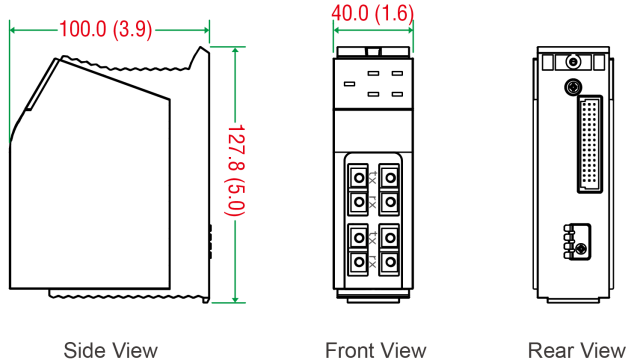

### Gigabit Ethernet Interface Modules

Unit: mm (inch)

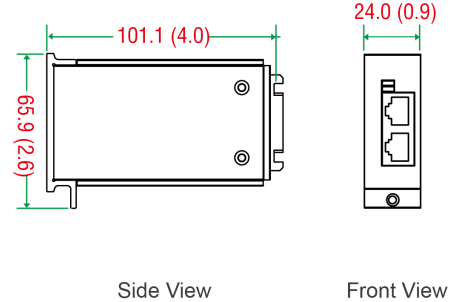

Side View

Front View

## Ordering Information

| Model Name  | 10/100/1000BaseT(X) Ports RJ45 Connector | 1000Base SFP | 10/100BaseT(X) Ports RJ45 Connector | 100BaseFX Ports Multi-Mode SC Connector | 100BaseFX Ports Multi-Mode ST Connector | 100BaseFX Ports Single-Mode SC Connector | 100BaseFX Ports Single-Mode SC Connector, 80 km |
|-------------|--|--------------|-------------------------------------|---|---|--|---|
| IM-2GTX     | 2  | -            | -                                   | -                                       | -                                       | -  | -   |
| IM-2GSFP    | -  | 2            | -                                   | -                                       | -                                       | -  | -   |
| IM-4TX      | -  | -            | 4                                   | -                                       | -                                       | -  | -   |
| IM-4MSC     | -  | -            | -                                   | 4                                       | -                                       | -  | -   |
| IM-4MST     | -  | -            | -                                   | -                                       | 4                                       | -  | -   |
| IM-2MSC/2TX | -  | -            | 2                                   | 2                                       | -                                       | -  | -   |
| IM-2MST/2TX | -  | -            | 2                                   | -                                       | 2                                       | -  | -   |
| IM-4SSC     | -  | -            | -                                   | -                                       | -                                       | 4  | -   |
| IM-2SSC/2TX | -  | -            | 2                                   | -                                       | -                                       | 2  | -   |
| IM-1LSC/3TX | -  | -            | 3                                   | -                                       | -                                       | -  | 1   |

## Accessories (sold separately)

### SFP Modules

|               |  |
|---------------|--|
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |

|                |  |
|----------------|--|
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# LM-7000H Module Series

Ethernet and PoE+ modules for PT-G7728/G7828 Series switches



## Features and Benefits

- -40 to 85°C wide operating temperature
- IEC 61850-3 and IEEE 1613 compliant

## Certifications



## Introduction

The LM-7000H Module Series hot-swappable line modules are designed for the PT-G7828 Layer 3 and PT-G7728 Layer 2 IEC 61850-3 Ethernet switches. The line modules allow greater flexibility by letting you to add 4 Gigabit Ethernet ports or PoE ports per module.

## Specifications

### Ethernet Interface

|  |                   |
|--|-------------------|
| 10/100/1000BaseT(X) Ports (RJ45 connector)   | LM-7000H-4GTX: 4  |
| 100/1000BaseSFP Slots                        | LM-7000H-4GSFP: 4 |
| PoE Ports (100/1000BaseT(X), RJ45 connector) | LM-7000H-4GPoE: 4 |

### Power Parameters

|                   |   |
|-------------------|---|
| Power Consumption | LM-7000H-4GTX/4GPoE: 1.98 W (max.)<br>LM-7000H-4GSFP: 1.56 W (max.) |
|-------------------|---|

### Physical Characteristics

|        |   |
|--------|---|
| Weight | LM-7000H-4GTX/4GPoE: 240 g (0.53 lb)<br>LM-7000H-4GSFP: 300 g (0.66 lb) |
|--------|---|

### MTBF

|      |  |
|------|--|
| Time | LM-7000H-4GPoE: 1,280,518 hrs<br>LM-7000H-4GSFP: 2,475,903 hrs<br>LM-7000H-4GTX: 2,641,729 hrs |
|------|--|

### Standards

|  |                          |
|--|--------------------------|
|  | Telcordia (Bellcore), GB |
|--|--------------------------|

### Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Ordering Information

| Model Name     | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | 100/1000BaseT(X) PoE Ports<br>RJ45 Connector | 100/1000Base SFP Slots |
|----------------|---|--|------------------------|
| LM-7000H-4GTX  | 4   | –  | –                      |
| LM-7000H-4GSFP | –   | –  | 4                      |
| LM-7000H-4GPoE | –   | 4  | –                      |

## Accessories (sold separately)

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |

|                |   |
|----------------|---|
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature    |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.



# MDS-G4012-4XGS Series

8 GbE + 4 10GbE-port Layer 2 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Multiple interface type 4-port modules for greater versatility
- Up to 8 Gigabit Ethernet ports or SFP slots plus 4 embedded 10G Ethernet ports
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

## Certifications



## Introduction

The MDS-G4012-4XGS Series modular switches support 4 10GbE + 8 Gigabit ports, including 4 embedded ports, 2 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4012-4XGS Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45 and SFP) and power units (24/48 VDC and 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4012-4XGS Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4012-4XGS Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual LV or HV power modules provides redundancy for high reliability and availability and also offers flexibility to accommodate the power requirements of different applications.

In addition, the MDS-G4012-4XGS Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

## Specifications

### Ethernet Interface

|                       |   |
|-----------------------|---|
| Pre-installed Modules | 4 embedded 10Gigabit ports                |
| Module                | 2 slots for optional 4-port FE/GE modules |

|                  |  |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules:<br/>Any power module</p> <p>LM-7000H PoE modules:<br/>PWR-HV-P48-A, PWR-LV-P48-A only</p>  |
| Standards        | <p>IEEE 802.3 for 10BaseT<br/>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>IEEE 802.3ab for 1000BaseT(X)<br/>IEEE 802.3z for 1000BaseX<br/>IEEE 802.3x for flow control<br/>IEEE 802.3ad for Port Trunk with LACP<br/>IEEE 802.1Q for VLAN Tagging<br/>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>IEEE 802.1w for Rapid Spanning Tree Protocol<br/>IEEE 802.1p for Class of Service<br/>IEEE 802.1X for authentication</p> |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP   |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy, Secure Boot, MAC Authentication Bypass, Access control list          |
| Time Management      | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Power Substation     | MMS  |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 1024          |
| Priority Queues    | 8             |
| Packet Buffer Size | 12 Mbits      |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |            |
|---------------|------------|
| USB Connector | USB Type A |
|---------------|------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module)  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA               |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module)<br>Relay output with current carrying capacity of 2 A @ 30 VDC |

## Power Parameters

|                                |  |
|--------------------------------|--|
| Input Voltage                  | With PWR-HV-P48-A installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC<br><br>With PWR-LV-P48-A installed:<br>24/48 VDC, PoE: 48 VDC<br><br>With PWR-HV-NP installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz<br><br>With PWR-LV-NP installed:<br>24/48 VDC   |
| Operating Voltage              | With PWR-HV-P48-A installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC<br><br>With PWR-LV-P48-A installed:<br>18 to 72 VDC, PoE: 46 to 57 VDC<br><br>With PWR-HV-NP installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz<br><br>With PWR-LV-NP installed:<br>18 to 72 VDC   |
| Input Current                  | With PWR-HV-P48-A/PWR-HV-NP installed:<br>Max. 0.11 A @ 110 VDC<br>Max. 0.06 A @ 220 VDC<br>Max. 0.29 A @ 110 VAC<br>Max. 0.18 A @ 220 VAC<br><br>With PWR-LV-P48-A/PWR-LV-NP installed:<br>Max. 0.53 A @ 24 VDC<br>Max. 0.28 A @ 48 VDC   |
| Overload Current Protection    | Supported  |
| Reverse Polarity Protection    | Supported  |
| Max. PoE Power Output per Port | 36 W   |
| Total PoE Power Budget         | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |


## Physical Characteristics

|            |  |
|------------|--|
| IP Rating  | IP40   |
| Dimensions | 197 x 115 x 163.25 mm (7.76 x 4.53 x 6.43 in)<br>212 x 115 x 163.25 mm (8.35 x 4.53 x 6.43 in) with dual PWR-HV-P48-A/PWR-LV-P48-A power modules installed |

|  |   |
|--|---|
| Weight                                 | 3,030 g (6.68 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit)   |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, UL 61010-2-201, EN 61010-2-201  |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-31  |
| Vibration                              | IEC 60068-2-6   |
| Power Substation                       | IEC 61850-3, IEEE 1613  |
| <b>MTBF</b>                            |   |
| Time                                   | 794,532 hrs   |
| Standards                              | Telcordia SR332   |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b>                |   |
| Device                                 | 1 x MDS-G4012-4XGS Series switch  |
| Installation Kit                       | Preinstalled, 2 x DIN-rail kit<br>4 x cap, plastic, for SFP+ slots  |
| Documentation                          | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card   |
| Note                                   | This product requires additional modules (sold separately) to function.   |

## Dimensions

Unit: mm (inch)

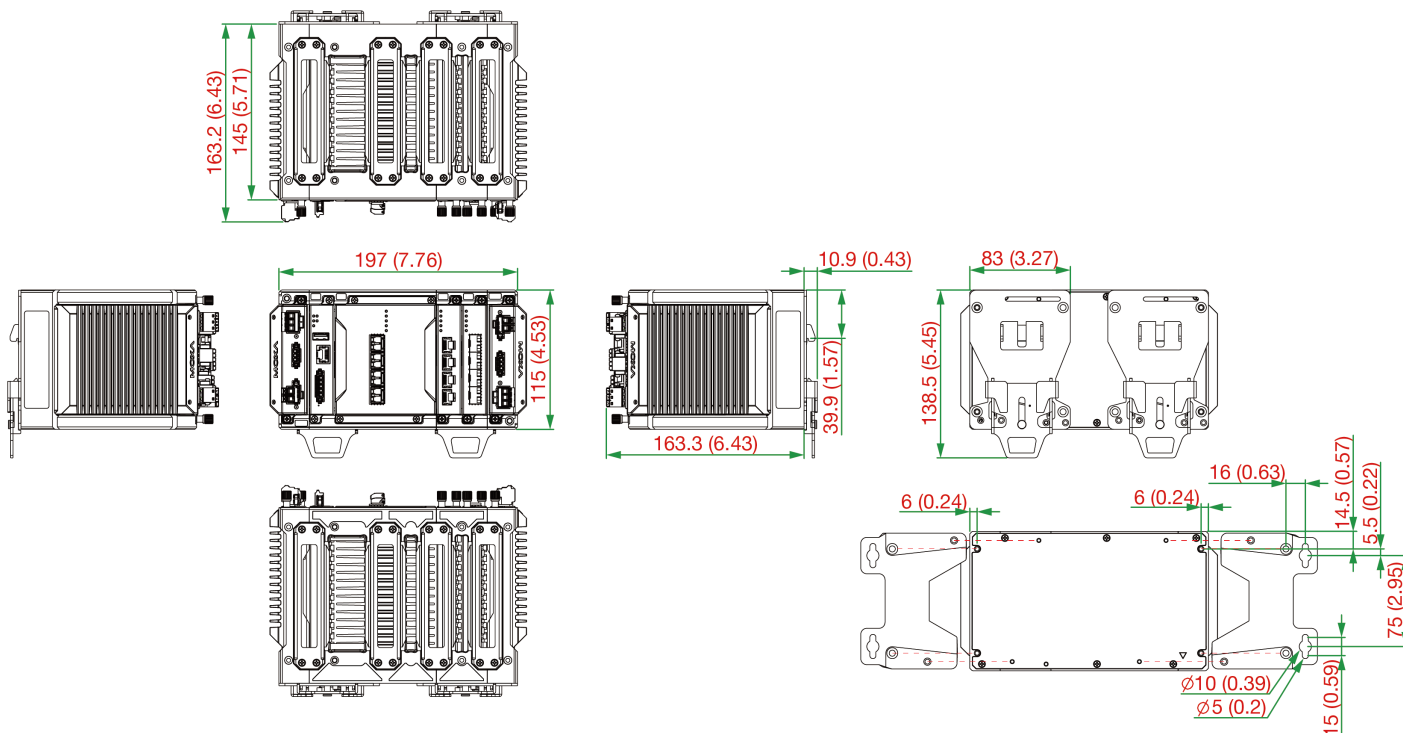

## Ordering Information

| Model Name       | Layer | Total No. of Ports | 10G SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|------------------|-------|--------------------|----------------|------------------------|--|-------------------------------------|-----------------|
| MDS-G4012-4XGS-T | 2     | 12                 | 4              | Up to 8                | Up to 8                                  | Up to 8                             | -40 to 75°C     |

## Accessories (sold separately)

### LM-7000H Module Series

|                |   |
|----------------|---|
| LM-7000H-4GTX  | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports                      |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots                          |
| LM-7000H-4TX   | Fast Ethernet module with 4 10/100BaseT(X) ports                              |
| LM-7000H-4PoE  | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports         |

### Power Modules

|              |   |
|--------------|---|
| PWR-LV-P48-A | 24/48 VDC power supply module with system power, relay, PoE power input, advanced heat sink       |
| PWR-HV-P48-A | 110/220 VAC/VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-LV-NP    | Power supply module (24/48 VDC) with system power input, relay                                    |
| PWR-HV-NP    | Power supply module (110/220 VAC/VDC) with system power input, relay                              |

### Wall-Mounting Kits

|           |                                       |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

### Rack-Mounting Kits

|          |  |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

## SFP Modules

|                 |  |
|-----------------|--|
| SFP-10GERLC-T   | SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-10GLRLC-T   | SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature   |
| SFP-10GSRLC-T   | SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature                                 |
| SFP-10GZRLC-T   | SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature   |
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |

|                |   |
|----------------|---|
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

### Software

|                   |                                       |
|-------------------|---------------------------------------|
| MXview-50         | MXview license for 50 nodes           |
| MXview-100        | MXview license for 100 nodes          |
| MXview-250        | MXview license for 250 nodes          |
| MXview-500        | MXview license for 500 nodes          |
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 08, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# MDS-G4012 Series

12G-port Layer 2 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Multiple interface type 4-port modules for greater versatility
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

## Certifications



## Introduction

The MDS-G4012 Series modular switches support up to 12 Gigabit ports, including 4 embedded ports, 2 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4000 Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45, SFP, and PoE+) and power units (24/48 VDC, 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4000 Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4000 Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual power modules provides redundancy for high reliability and availability while LV and HV power module options offer additional flexibility to accommodate the power requirements of different applications.

In addition, the MDS-G4000 Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

## Specifications

### Ethernet Interface

|                       |   |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports                  |
| Module                | 2 slots for optional 4-port FE/GE modules |



|                  |  |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules:<br/>Any power module</p> <p>LM-7000H PoE modules:<br/>PWR-HV-P48, PWR-LV-P48 only</p>  |
| Standards        | <p>IEEE 802.3 for 10BaseT<br/>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>IEEE 802.3ab for 1000BaseT(X)<br/>IEEE 802.3z for 1000BaseX<br/>IEEE 802.3x for flow control<br/>IEEE 802.3ad for Port Trunk with LACP<br/>IEEE 802.1Q for VLAN Tagging<br/>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>IEEE 802.1w for Rapid Spanning Tree Protocol<br/>IEEE 802.1p for Class of Service<br/>IEEE 802.1X for authentication</p> |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 1024          |
| Priority Queues    | 8             |
| Packet Buffer Size | 12 Mbits      |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module)  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA               |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module)<br>Relay output with current carrying capacity of 2 A @ 30 VDC |


## Power Parameters

|                                 |  |
|---------------------------------|--|
| Input Voltage                   | with PWR-HV-P48 installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC<br><br>with PWR-LV-P48 installed:<br>24/48 VDC, PoE: 48 VDC<br><br>with PWR-HV-NP installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz<br><br>with PWR-LV-NP installed:<br>24/48 VDC   |
| Operating Voltage               | with PWR-HV-P48 installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC<br><br>with PWR-LV-P48 installed:<br>18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location)<br><br>with PWR-HV-NP installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz<br><br>with PWR-LV-NP installed:<br>18 to 72 VDC  |
| Input Current                   | with PWR-HV-P48/PWR-HV-NP installed:<br>Max. 0.11 A @ 110 VDC<br>Max. 0.06 A @ 220 VDC<br>Max. 0.29 A @ 110 VAC<br>Max. 0.18 A @ 220 VAC<br><br>with PWR-LV-P48/PWR-LV-NP installed:<br>Max. 0.53 A @ 24 VDC<br>Max. 0.28 A @ 48 VDC   |
| Max. PoE Power Output per Port  | 36 W   |
| Total PoE Power Budget          | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |
| Overload Current Protection     | Supported  |
| Reverse Polarity Protection     | Supported  |
| <b>Physical Characteristics</b> |  |
| IP Rating                       | IP40   |
| Dimensions                      | 134 x 115 x 163.25 mm (5.28 x 4.53 x 6.44 in)  |

|  |   |
|--|---|
| Weight                                 | 2000 g (4.41 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Temperature: -10 to 60°C (-14 to 140°F)<br>Wide Temperature: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1  |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-31  |
| Vibration                              | IEC 60068-2-6   |
| Hazardous Locations                    | ATEX, Class I Division 2  |
| Power Substation                       | IEC 61850-3, IEEE 1613  |
| <b>MTBF</b>                            |   |
| Time                                   | 1,008,160 hrs   |
| Standards                              | Telcordia SR332   |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b>                |   |
| Device                                 | 1 x MDS-G4012 Series switch   |
| Cable                                  | 1 x RJ45-to-DB9 console cable   |
| Installation Kit                       | Pre-install 1 x DIN-rail kit<br>2 x cap, plastic, for RJ45 port   |
| Documentation                          | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card   |
| Note                                   | This product requires additional modules (sold separately) to function.   |

## Dimensions

Unit: mm (inch)

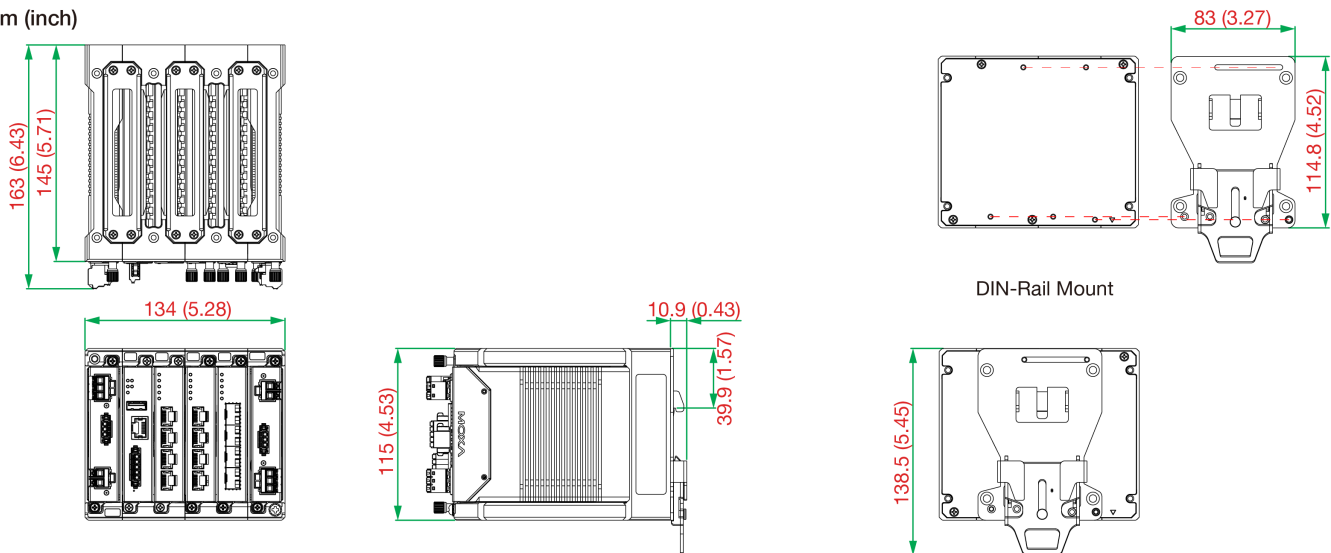

## Ordering Information

| Model Name  | Layer | Total No. of Ports | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | PoE 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | PoE 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-------------|-------|--------------------|------------------------|--|--|-------------------------------------|---|-----------------|
| MDS-G4012   | 2     | 12                 | Up to 8                | Up to 12                                 | Up to 8                                      | Up to 8                             | Up to 8                                 | -10 to 60°C     |
| MDS-G4012-T | 2     | 12                 | Up to 8                | Up to 12                                 | Up to 8                                      | Up to 8                             | Up to 8                                 | -40 to 75°C     |

## Accessories (sold separately)

### LM-7000H Module Series

|                |   |
|----------------|---|
| LM-7000H-4GTX  | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports                      |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots                          |
| LM-7000H-4TX   | Fast Ethernet module with 4 10/100BaseT(X) ports                              |
| LM-7000H-4PoE  | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports         |

### Power Modules

|            |   |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input       |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP  | Power supply module (24/48 VDC) with system power input, relay                        |
| PWR-HV-NP  | Power supply module (110/220 VAC/VDC) with system power input, relay                  |

### Wall-Mounting Kits

|           |                                       |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

### Rack-Mounting Kits

|          |  |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature     |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GTXRJ45-T  | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |

## Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

## Software

|                   |                                       |
|-------------------|---------------------------------------|
| MXview-50         | MXview license for 50 nodes           |
| MXview-100        | MXview license for 100 nodes          |
| MXview-250        | MXview license for 250 nodes          |
| MXview-500        | MXview license for 500 nodes          |
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 25, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# MDS-G4020-4XGS Series

16 GbE + 4 10GbE-port Layer 2 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Multiple interface type 4-port modules for greater versatility
- Up to 16 Gigabit Ethernet ports or SFP slots plus 4 embedded 10G Ethernet ports
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

## Certifications



## Introduction

The MDS-G4020-4XGS Series modular switches support 4 10GbE + 16 Gigabit ports, including 4 embedded ports, 4 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4020-4XGS Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45 and SFP) and power units (24/48 VDC and 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4020-4XGS Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4020-4XGS Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual LV or HV power modules provides redundancy for high reliability and availability and also offers flexibility to accommodate the power requirements of different applications.

In addition, the MDS-G4020-4XGS Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

## Specifications

### Ethernet Interface

|                       |   |
|-----------------------|---|
| Pre-installed Modules | 4 embedded 10Gigabit ports                |
| Module                | 4 slots for optional 4-port FE/GE modules |

|                  |  |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules:<br/>Any power module</p> <p>LM-7000H PoE modules:<br/>PWR-HV-P48-A, PWR-LV-P48-A only</p>  |
| Standards        | <p>IEEE 802.3 for 10BaseT<br/>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>IEEE 802.3ab for 1000BaseT(X)<br/>IEEE 802.3z for 1000BaseX<br/>IEEE 802.3x for flow control<br/>IEEE 802.3ad for Port Trunk with LACP<br/>IEEE 802.1Q for VLAN Tagging<br/>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>IEEE 802.1w for Rapid Spanning Tree Protocol<br/>IEEE 802.1p for Class of Service<br/>IEEE 802.1X for authentication</p> |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP   |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy, Secure Boot, MAC Authentication Bypass, Access control list          |
| Time Management      | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Power Substation     | MMS  |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 1024          |
| Priority Queues    | 8             |
| Packet Buffer Size | 12 Mbits      |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |            |
|---------------|------------|
| USB Connector | USB Type A |
|---------------|------------|



## Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module)  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA               |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module)<br>Relay output with current carrying capacity of 2 A @ 30 VDC |

## Power Parameters

|                                |   |
|--------------------------------|---|
| Input Voltage                  | <p>With PWR-HV-P48-A installed:<br/>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC</p> <p>With PWR-LV-P48-A installed:<br/>24/48 VDC, PoE: 48 VDC</p> <p>With PWR-HV-NP installed:<br/>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz</p> <p>With PWR-LV-NP installed:<br/>24/48 VDC</p>   |
| Operating Voltage              | <p>With PWR-HV-P48-A installed:<br/>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC</p> <p>With PWR-LV-P48-A installed:<br/>18 to 72 VDC, PoE: 46 to 57 VDC</p> <p>With PWR-HV-NP installed:<br/>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz</p> <p>With PWR-LV-NP installed:<br/>18 to 72 VDC</p>   |
| Input Current                  | <p>With PWR-HV-P48-A/PWR-HV-NP installed:<br/>Max. 0.11 A @ 110 VDC<br/>Max. 0.06 A @ 220 VDC<br/>Max. 0.29 A @ 110 VAC<br/>Max. 0.18 A @ 220 VAC</p> <p>With PWR-LV-P48-A/PWR-LV-NP installed:<br/>Max. 0.53 A @ 24 VDC<br/>Max. 0.28 A @ 48 VDC</p>   |
| Overload Current Protection    | Supported   |
| Reverse Polarity Protection    | Supported   |
| Max. PoE Power Output per Port | 36 W  |
| Total PoE Power Budget         | <p>Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems</p> <p>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems</p> <p>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems</p> <p>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems</p> |


## Physical Characteristics

|            |  |
|------------|--|
| IP Rating  | IP40   |
| Dimensions | 239 x 115 x 163.25 mm (9.41 x 4.53 x 6.43 in)<br>254 x 115 x 163.25 mm (10 x 4.53 x 6.43 in) with dual PWR-HV-P48-A/PWR-LV-P48-A power modules installed |

|  |   |
|--|---|
| Weight                                 | 3,400 g (7.50 lb)   |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit)   |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, UL 61010-2-201, EN 61010-2-201  |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-31  |
| Vibration                              | IEC 60068-2-6   |
| Power Substation                       | IEC 61850-3, IEEE 1613  |
| <b>MTBF</b>                            |   |
| Time                                   | 794,302 hrs   |
| Standards                              | Telcordia SR332   |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b>                |   |
| Device                                 | 1 x MDS-G4020-4XGS Series switch  |
| Installation Kit                       | Preinstalled, 2 x DIN-rail kit<br>4 x cap, plastic, for SFP+ slots  |
| Documentation                          | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card   |
| Note                                   | This product requires additional modules (sold separately) to function.   |

## Dimensions

Unit: mm (inch)

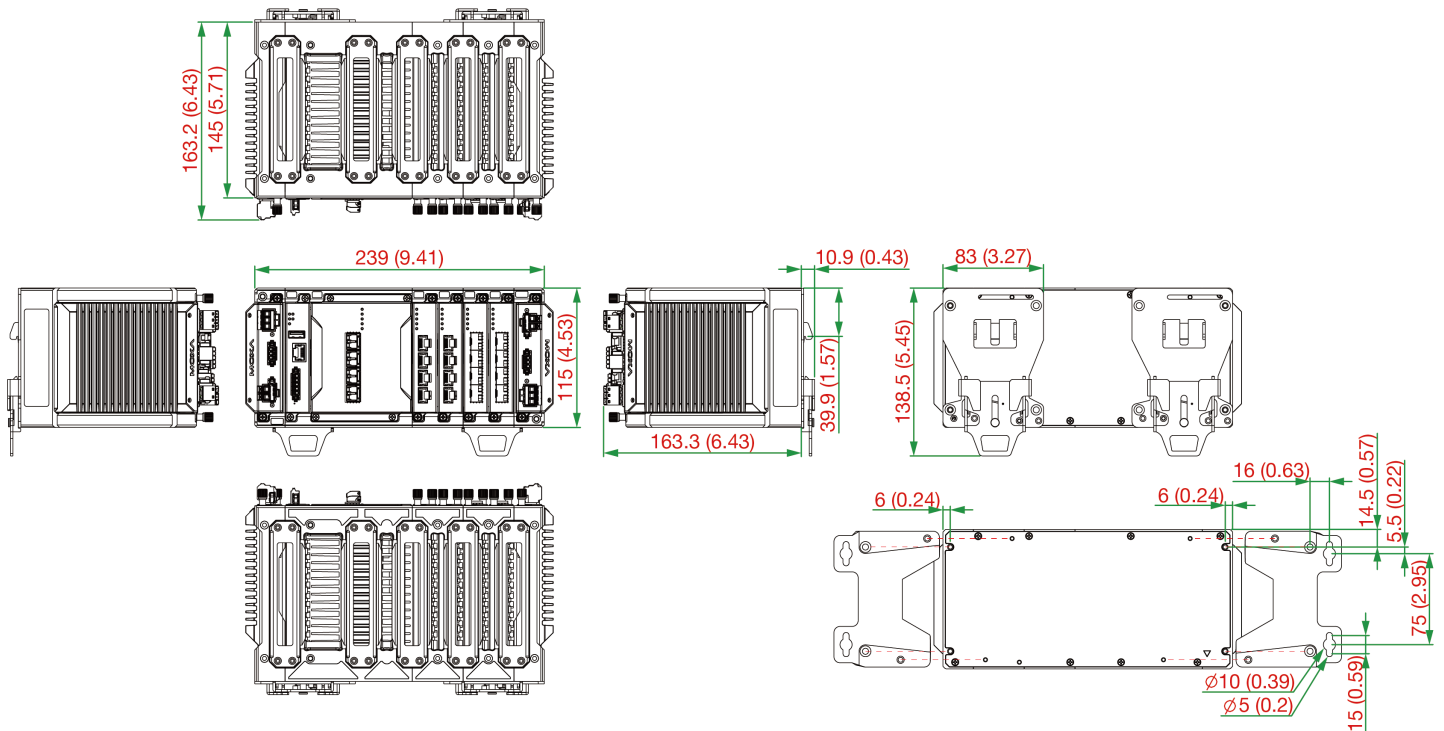

## Ordering Information

| Model Name       | Layer | Total No. of Ports | 10G SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|------------------|-------|--------------------|----------------|------------------------|--|-------------------------------------|-----------------|
| MDS-G4020-4XGS-T | 2     | 20                 | 4              | Up to 16               | Up to 16                                 | Up to 16                            | -40 to 75°C     |

## Accessories (sold separately)

### LM-7000H Module Series

|                |   |
|----------------|---|
| LM-7000H-4GTX  | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports                      |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots                          |
| LM-7000H-4TX   | Fast Ethernet module with 4 10/100BaseT(X) ports                              |
| LM-7000H-4PoE  | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports         |

### Power Modules

|              |   |
|--------------|---|
| PWR-LV-P48-A | 24/48 VDC power supply module with system power, relay, PoE power input, advanced heat sink       |
| PWR-HV-P48-A | 110/220 VAC/VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-LV-NP    | Power supply module (24/48 VDC) with system power input, relay                                    |
| PWR-HV-NP    | Power supply module (110/220 VAC/VDC) with system power input, relay                              |

### Wall-Mounting Kits

|           |                                       |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

### Rack-Mounting Kits

|          |  |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

## SFP Modules

|                 |  |
|-----------------|--|
| SFP-10GERLC-T   | SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-10GLRLC-T   | SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature   |
| SFP-10GSRLC-T   | SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature                                 |
| SFP-10GZRLC-T   | SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature   |
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                      |

|                |   |
|----------------|---|
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

### Software

|                   |                                       |
|-------------------|---------------------------------------|
| MXview-50         | MXview license for 50 nodes           |
| MXview-100        | MXview license for 100 nodes          |
| MXview-250        | MXview license for 250 nodes          |
| MXview-500        | MXview license for 500 nodes          |
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 08, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# MDS-G4020 Series

20G-port Layer 2 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Multiple interface type 4-port modules for greater versatility
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

## Certifications



## Introduction

The MDS-G4020 Series modular switches support up to 20 Gigabit ports, including 4 embedded ports, 4 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4000 Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45, SFP, and PoE+) and power units (24/48 VDC, 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4000 Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4000 Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual power modules provides redundancy for high reliability and availability while LV and HV power module options offer additional flexibility to accommodate the power requirements of different applications.

In addition, the MDS-G4000 Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

## Specifications

### Ethernet Interface

|                       |   |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports                  |
| Module                | 4 slots for optional 4-port FE/GE modules |

|                  |  |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules:<br/>Any power module</p> <p>LM-7000H PoE modules:<br/>PWR-HV-P48, PWR-LV-P48 only</p>  |
| Standards        | <p>IEEE 802.3 for 10BaseT<br/>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>IEEE 802.3ab for 1000BaseT(X)<br/>IEEE 802.3z for 1000BaseX<br/>IEEE 802.3x for flow control<br/>IEEE 802.3ad for Port Trunk with LACP<br/>IEEE 802.1Q for VLAN Tagging<br/>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>IEEE 802.1w for Rapid Spanning Tree Protocol<br/>IEEE 802.1p for Class of Service<br/>IEEE 802.1X for authentication</p> |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 1024          |
| Priority Queues    | 8             |
| Packet Buffer Size | 12 Mbits      |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module)  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA               |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module)<br>Relay output with current carrying capacity of 2 A @ 30 VDC |

## Power Parameters


|                                 |  |
|---------------------------------|--|
| Input Voltage                   | with PWR-HV-P48 installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC<br><br>with PWR-LV-P48 installed:<br>24/48 VDC, PoE: 48 VDC<br><br>with PWR-HV-NP installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz<br><br>with PWR-LV-NP installed:<br>24/48 VDC   |
| Operating Voltage               | with PWR-HV-P48 installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC<br><br>with PWR-LV-P48 installed:<br>18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location)<br><br>with PWR-HV-NP installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz<br><br>with PWR-LV-NP installed:<br>18 to 72 VDC  |
| Input Current                   | with PWR-HV-P48/PWR-HV-NP installed:<br>Max. 0.11 A @ 110 VDC<br>Max. 0.06 A @ 220 VDC<br>Max. 0.29 A @ 110 VAC<br>Max. 0.18 A @ 220 VAC<br><br>with PWR-LV-P48/PWR-LV-NP installed:<br>Max. 0.53 A @ 24 VDC<br>Max. 0.28 A @ 48 VDC   |
| Max. PoE Power Output per Port  | 36 W   |
| Total PoE Power Budget          | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |
| Overload Current Protection     | Supported  |
| Reverse Polarity Protection     | Supported  |
| <b>Physical Characteristics</b> |  |
| IP Rating                       | IP40   |
| Dimensions                      | 176 x 115 x 163.25 mm (6.93 x 4.53 x 6.44 in)  |



|  |   |
|--|---|
| Weight                                 | 2500 g (5.51 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)  |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Temperature: -10 to 60°C (-14 to 140°F)<br>Wide Temperature: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1  |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-31  |
| Vibration                              | IEC 60068-2-6   |
| Hazardous Locations                    | ATEX, Class I Division 2  |
| Power Substation                       | IEEE 1613, IEC 61850-3  |
| <b>MTBF</b>                            |   |
| Time                                   | 1,007,790 hrs   |
| Standards                              | Telcordia SR332   |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b>                |   |
| Device                                 | 1 x MDS-G4020 Series switch   |
| Cable                                  | 1 x RJ45-to-DB9 console cable   |
| Installation Kit                       | Pre-install 2 x DIN-rail kit<br>2 x cap, plastic, for RJ45 port   |
| Documentation                          | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card   |
| Note                                   | This product requires additional modules (sold separately) to function.   |

## Dimensions

Unit: mm (inch)

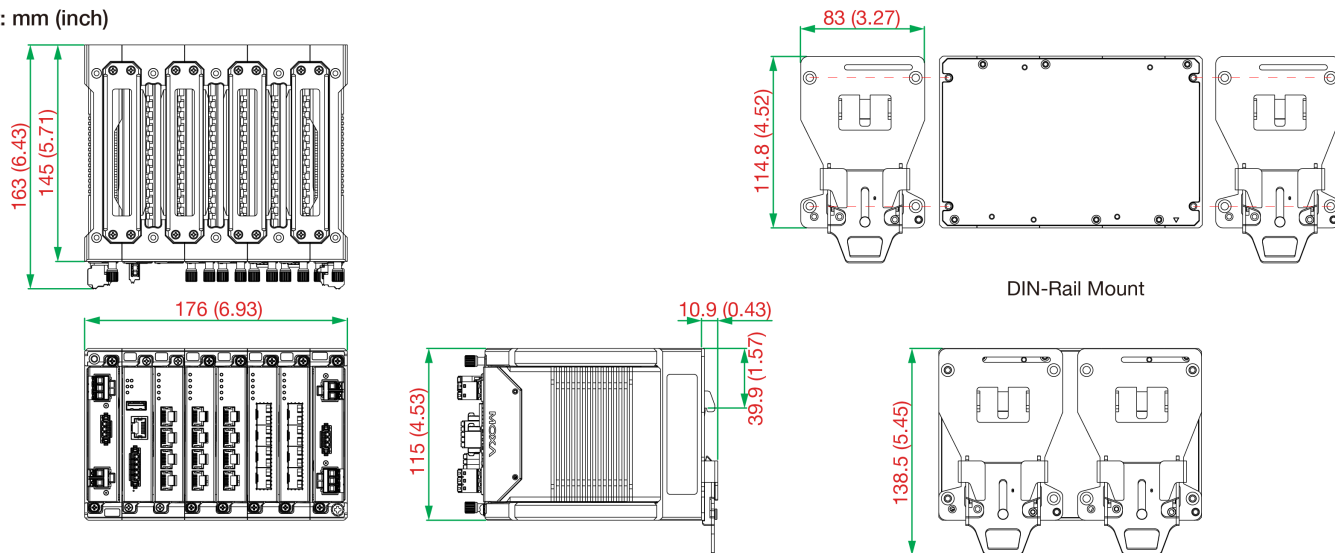

## Ordering Information

| Model Name  | Layer | Total No. of Ports | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | PoE 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | PoE 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-------------|-------|--------------------|------------------------|--|--|-------------------------------------|---|-----------------|
| MDS-G4020   | 2     | 20                 | Up to 16               | Up to 20                                 | Up to 16                                     | Up to 16                            | Up to 16                                | -10 to 60°C     |
| MDS-G4020-T | 2     | 20                 | Up to 16               | Up to 20                                 | Up to 16                                     | Up to 16                            | Up to 16                                | -40 to 75°C     |

## Accessories (sold separately)

### LM-7000H Module Series

|                |   |
|----------------|---|
| LM-7000H-4GTX  | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports                      |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots                          |
| LM-7000H-4TX   | Fast Ethernet module with 4 10/100BaseT(X) ports                              |
| LM-7000H-4PoE  | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports         |

### Power Modules

|            |   |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input       |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP  | Power supply module (24/48 VDC) with system power input, relay                        |
| PWR-HV-NP  | Power supply module (110/220 VAC/VDC) with system power input, relay                  |

### Wall-Mounting Kits

|           |                                       |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

### Rack-Mounting Kits

|          |  |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature     |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GTXRJ45-T  | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |

## Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

## Software

|                   |                                       |
|-------------------|---------------------------------------|
| MXview-50         | MXview license for 50 nodes           |
| MXview-100        | MXview license for 100 nodes          |
| MXview-250        | MXview license for 250 nodes          |
| MXview-500        | MXview license for 500 nodes          |
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 25, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# MDS-G4028 Series

28G-port Layer 2 full Gigabit modular managed Ethernet switches



## Features and Benefits

- Multiple interface type 4-port modules for greater versatility
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

## Certifications



## Introduction

The MDS-G4028 Series modular switches support up to 28 Gigabit ports, including 4 embedded ports, 6 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4000 Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45, SFP, and PoE+) and power units (24/48 VDC, 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4000 Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4000 Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual power modules provides redundancy for high reliability and availability while LV and HV power module options offer additional flexibility to accommodate the power requirements of different applications.

In addition, the MDS-G4000 Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

## Specifications

### Ethernet Interface

|                       |   |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports                  |
| Module                | 6 slots for optional 4-port FE/GE modules |

|                  |  |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules:<br/>Any power module</p> <p>LM-7000H PoE modules:<br/>PWR-HV-P48, PWR-LV-P48 only</p>  |
| Standards        | <p>IEEE 802.3 for 10BaseT<br/>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>IEEE 802.3ab for 1000BaseT(X)<br/>IEEE 802.3z for 1000BaseX<br/>IEEE 802.3x for flow control<br/>IEEE 802.3ad for Port Trunk with LACP<br/>IEEE 802.1Q for VLAN Tagging<br/>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>IEEE 802.1w for Rapid Spanning Tree Protocol<br/>IEEE 802.1p for Class of Service<br/>IEEE 802.1X for authentication</p> |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter               | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier  |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation  |
| Security             | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy   |
| Time Management      | SNTP, NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |

### Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 16 K          |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| IGMP Groups        | 1024          |
| Priority Queues    | 8             |
| Packet Buffer Size | 12 Mbits      |

### Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

### USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module)  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA               |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module)<br>Relay output with current carrying capacity of 2 A @ 30 VDC |

## Power Parameters


|                                 |  |
|---------------------------------|--|
| Input Voltage                   | with PWR-HV-P48 installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC<br><br>with PWR-LV-P48 installed:<br>24/48 VDC, PoE: 48 VDC<br><br>with PWR-HV-NP installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz<br><br>with PWR-LV-NP installed:<br>24/48 VDC   |
| Operating Voltage               | with PWR-HV-P48 installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC<br><br>with PWR-LV-P48 installed:<br>18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location)<br><br>with PWR-HV-NP installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz<br><br>with PWR-LV-NP installed:<br>18 to 72 VDC  |
| Input Current                   | with PWR-HV-P48/PWR-HV-NP installed:<br>Max. 0.11 A @ 110 VDC<br>Max. 0.06 A @ 220 VDC<br>Max. 0.29 A @ 110 VAC<br>Max. 0.18 A @ 220 VAC<br><br>with PWR-LV-P48/PWR-LV-NP installed:<br>Max. 0.53 A @ 24 VDC<br>Max. 0.28 A @ 48 VDC   |
| Max. PoE Power Output per Port  | 36 W   |
| Total PoE Power Budget          | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems<br><br>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |
| Overload Current Protection     | Supported  |
| Reverse Polarity Protection     | Supported  |
| <b>Physical Characteristics</b> |  |
| IP Rating                       | IP40   |
| Dimensions                      | 218 x 115 x 163.25 mm (8.59 x 4.53 x 6.44 in)  |

|  |   |
|--|---|
| Weight                                 | 2840 g (6.27 lb)  |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit)   |
| <b>Environmental Limits</b>            |   |
| Operating Temperature                  | Standard Temperature: -10 to 60°C (-14 to 140°F)<br>Wide Temperature: -40 to 75°C (-40 to 167°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)  |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)   |
| <b>Standards and Certifications</b>    |   |
| Safety                                 | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1  |
| EMC                                    | EN 55032/35, EN 61000-6-2/-6-4  |
| EMI                                    | CISPR 32, FCC Part 15B Class A  |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 |
| Railway                                | EN 50121-4  |
| Traffic Control                        | NEMA TS2  |
| Shock                                  | IEC 60068-2-27  |
| Freefall                               | IEC 60068-2-31  |
| Vibration                              | IEC 60068-2-6   |
| Hazardous Locations                    | ATEX, Class I Division 2  |
| Power Substation                       | IEEE 1613, IEC 61850-3  |
| <b>MTBF</b>                            |   |
| Time                                   | 966,801 hrs   |
| Standards                              | Telcordia SR332   |
| <b>Warranty</b>                        |   |
| Warranty Period                        | 5 years   |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b>                |   |
| Device                                 | 1 x MDS-G4028 Series switch   |
| Cable                                  | 1 x RJ45-to-DB9 console cable   |
| Installation Kit                       | Pre-install 2 x DIN-rail kit<br>2 x cap, plastic, for RJ45 port   |
| Documentation                          | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card   |
| Note                                   | This product requires additional modules (sold separately) to function.   |



## Dimensions

Unit: mm (inch)

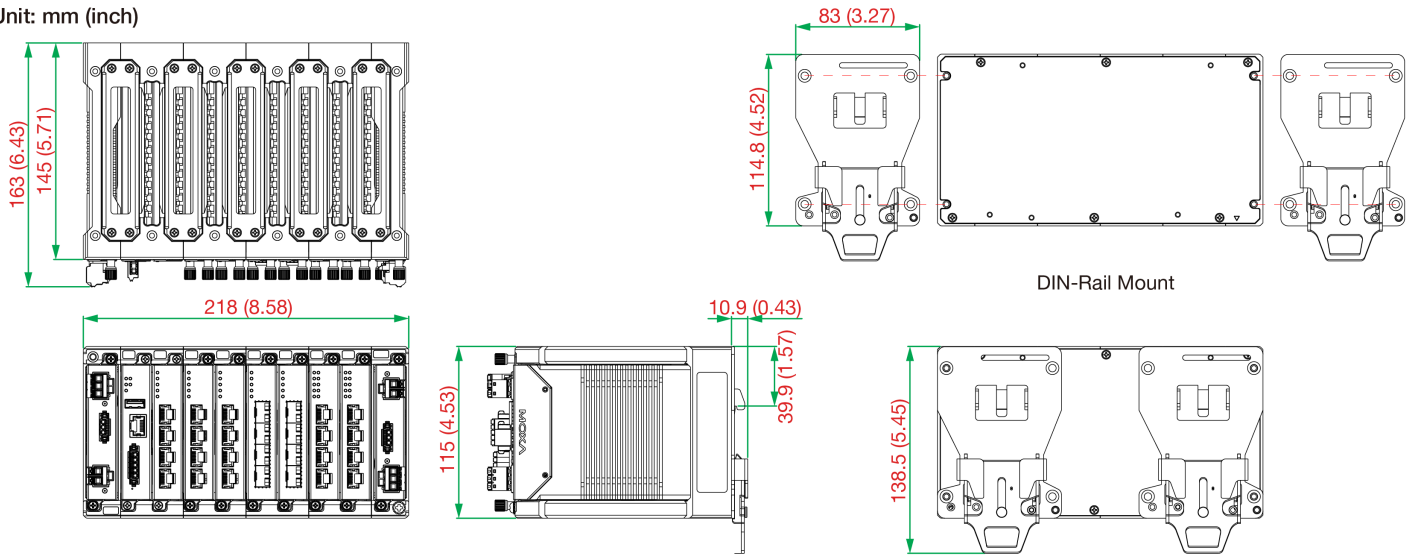

## Ordering Information

| Model Name  | Layer | Total No. of Ports | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | PoE 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | PoE 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-------------|-------|--------------------|------------------------|--|--|-------------------------------------|---|-----------------|
| MDS-G4028   | 2     | 28                 | Up to 24               | Up to 28                                 | Up to 24                                     | Up to 24                            | Up to 24                                | -10 to 60°C     |
| MDS-G4028-T | 2     | 28                 | Up to 24               | Up to 28                                 | Up to 24                                     | Up to 24                            | Up to 24                                | -40 to 75°C     |

## Accessories (sold separately)

### LM-7000H Module Series

|                |   |
|----------------|---|
| LM-7000H-4GTX  | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports                      |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots                          |
| LM-7000H-4TX   | Fast Ethernet module with 4 10/100BaseT(X) ports                              |
| LM-7000H-4PoE  | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports         |

### Power Modules

|            |   |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input       |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP  | Power supply module (24/48 VDC) with system power input, relay                        |
| PWR-HV-NP  | Power supply module (110/220 VAC/VDC) with system power input, relay                  |

### Wall-Mounting Kits

|           |                                       |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

### Rack-Mounting Kits

|          |  |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

### SFP Modules

|              |   |
|--------------|---|
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature     |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature                                       |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHLC      | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXLC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GTXRJ45-T  | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |

## Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

## Software

|                   |                                       |
|-------------------|---------------------------------------|
| MXview-50         | MXview license for 50 nodes           |
| MXview-100        | MXview license for 100 nodes          |
| MXview-250        | MXview license for 250 nodes          |
| MXview-500        | MXview license for 500 nodes          |
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 25, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# PM-7500 Module Series

Gigabit and Fast Ethernet modules for the PT-7528-24TX Series rackmount Ethernet switches



## Features and Benefits

- -40 to 85°C wide operating temperature
- IEC 61850-3 and IEEE 1613 compliant

## Certifications



## Introduction

The PM-7500 Module Series includes Gigabit and Fast Ethernet modules for the PT-7528-24TX Series rackmount Ethernet switches.

## Specifications

### Ethernet Interface

|   |  |
|---|--|
| 100BaseFX Ports (multi-mode SC connector)             | PM-7500-2MSC: 2<br>PM-7500-4MSC: 4       |
| 100BaseFX Ports (multi-mode ST connector)             | PM-7500-2MST: 2<br>PM-7500-4MST: 4       |
| 100BaseFX Ports (single-mode SC connector)            | PM-7500-2SSC: 2<br>PM-7500-4SSC: 4       |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | PM-7500-2GTXSFP: 2<br>PM-7500-4GTXSFP: 4 |

### Optical Fiber

|                  |                  | 100BaseFX    |           |              |
|------------------|------------------|--------------|-----------|--------------|
|                  |                  | Multi-Mode   |           | Single-Mode  |
| Fiber Cable Type |                  | OM1          | 50/125 μm | G.652        |
|                  |                  |              |           |              |
| Typical Distance |                  | 4 km         | 5 km      | 40 km        |
| Wavelength       | Typical (nm)     | 1300         |           | 1310         |
|                  | TX Range (nm)    | 1260 to 1360 |           | 1280 to 1340 |
|                  | RX Range (nm)    | 1100 to 1600 |           | 1100 to 1600 |
| Optical Power    | TX Range (dBm)   | -10 to -20   |           | 0 to -5      |
|                  | RX Range (dBm)   | -3 to -32    |           | -3 to -34    |
|                  | Link Budget (dB) | 12           |           | 29           |

|   |     | 100BaseFX    |       |             |
|---|-----|--------------|-------|-------------|
|   |     | Multi-Mode   |       | Single-Mode |
| Fiber Cable Type  | OM1 | 50/125 μm    | G.652 |             |
|   |     | 800 MHz x km |       |             |
| Dispersion Penalty (dB)   |     | 3            | 1     |             |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |     |              |       |             |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x PM-7500 Series module   |
| Documentation | 1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |

## Ordering Information

| Model Name      | 100BaseFX Multi-Mode Ports with SC Connectors | 100BaseFX Multi-Mode Ports with ST Connectors | Single-Mode Ports with SC Connectors | Combo Ports, 10/100/1000BaseT(X) or 100/1000BaseSFP | Operating Temp. |
|-----------------|---|---|--------------------------------------|---|-----------------|
| PM-7500-2MSC    | 2   | –   | –                                    | –   | -45 to 85°C     |
| PM-7500-2MST    | –   | 2   | –                                    | –   | -45 to 85°C     |
| PM-7500-2SSC    | –   | –   | 2                                    | –   | -45 to 85°C     |
| PM-7500-4MSC    | 4   | –   | –                                    | –   | -45 to 85°C     |
| PM-7500-4MST    | –   | 4   | –                                    | –   | -45 to 85°C     |
| PM-7500-4SSC    | –   | –   | 4                                    | –   | -45 to 85°C     |
| PM-7500-2GTXSFP | –   | –   | –                                    | 2   | -45 to 85°C     |
| PM-7500-4GTXSFP | –   | –   | –                                    | 4   | -45 to 85°C     |

## Accessories (sold separately)

### SFP Modules

|               |  |
|---------------|--|
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |

|                |  |
|----------------|--|
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# PT-508 Series

## IEC 61850-3 8-port Layer 2 DIN-rail managed Ethernet switches



### Features and Benefits

- IEC 61850-3 and IEEE 1613 compliant
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Isolated universal 24 VDC or 48 VDC redundant power inputs
- Wide 110/220 VDC/VAC power supply range
- Modbus TCP, LLDP, SNMP Inform, QoS, IGMP snooping, VLAN, IEEE 802.1X, HTTPS, SNMPv3, and SSH supported
- -40 to 85°C operating temperature range

### Certifications



## Introduction

The PowerTrans PT-508 Series is designed to meet the demands of power substation automation systems (IEC 61850-3, IEEE 1613). The PT-508's optical fiber Fast Ethernet backbone, redundant ring, redundant power inputs (24 VDC or 48 VDC), and isolated power inputs (24 VDC, 48 VDC, or 110/220 VDC/VAC) increase the reliability of your communications and save on cabling/wiring costs. In addition, the DIN-rail and wall-mounting design of the PT-508 switches simplify network planning, and allows greater flexibility by letting you install up to 8 Fast Ethernet ports for power distribution applications.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- VLAN Unaware: Supports priority-tagged frames to be received by specific IEDs
- EtherNet/IP and Modbus TCP industrial Ethernet protocols supported
- Configurable by web browser, Telnet/Serial console, CLI, Windows utility, and ABC-01 automatic backup configurator
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Bandwidth management to prevent unpredictable network status
- Multi-port mirroring for online debugging
- Automatic warning by exception through email and relay output
- RMON for proactive and efficient network monitoring
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery

### Cybersecurity Features

- User passwords with multiple levels of security protect against unauthorized configuration
- SSH/HTTPS is used to encrypt passwords and data
- Lock switch ports with 802.1X port-based network access control so that only authorized clients can access the port
- RADIUS/TACACS+ allows you to manage passwords from a central location
- 802.1Q VLAN allows you to logically partition traffic transmitted between selected switch ports
- Secure switch ports so that only specific devices and/or MAC addresses can access the ports
- Disable one or more ports to block network traffic
- SNMPv3 provides encrypted authentication and access security

## Specifications

### Ethernet Interface

|   |                        |
|---|------------------------|
| 10/100BaseT(X) Ports (RJ45 connector)     | 6                      |
| 100BaseFX Ports (multi-mode SC connector) | PT-508-MM-SC Series: 2 |
| 100BaseFX Ports (multi-mode ST connector) | PT-508-MM-ST Series: 2 |

|  |                        |
|--|------------------------|
| 100BaseFX Ports (single-mode SC connector) | PT-508-SS-SC Series: 2 |
| 100BaseFX Ports (multi-mode LC connector)  | PT-508-MM-LC Series: 2 |
| 100BaseFX Ports (single-mode LC connector) | PT-508-SS-LC Series: 2 |

| Optical Fiber   |                         | 100BaseFX        |              |              |
|---|-------------------------|------------------|--------------|--------------|
|   |                         | Multi-Mode       |              | Single-Mode  |
|   |                         | Fiber Cable Type | OM1          | 50/125 μm    |
|   |                         |                  | 800 MHz x km |              |
| Typical Distance  |                         | 4 km             | 5 km         | 40 km        |
| Wavelength  | Typical (nm)            | 1300             |              | 1310         |
|   | TX Range (nm)           | 1260 to 1360     |              | 1280 to 1340 |
|   | RX Range (nm)           | 1100 to 1600     |              | 1100 to 1600 |
| Optical Power   | TX Range (dBm)          | -10 to -20       |              | 0 to -5      |
|   | RX Range (dBm)          | -3 to -32        |              | -3 to -34    |
|   | Link Budget (dB)        | 12               |              | 29           |
|   | Dispersion Penalty (dB) | 3                |              | 1            |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |                  |              |              |

|           |  |
|-----------|--|
| Standards | <p>IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1s for Multiple Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1X for authentication<br/> IEEE 802.3 for 10BaseT<br/> IEEE 802.3ab for 1000BaseT(X)<br/> IEEE 802.3ad for Port Trunk with LACP<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.3x for flow control</p> |
|-----------|--|

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2c, Port-based VLAN, VLAN unaware  |
| Industrial Protocols | EtherNet/IP, Modbus TCP   |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, HTTP, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security             | HTTPS/SSL, TACACS+, Port Lock, RADIUS, Rate Limit, SSH  |
| Time Management      | NTP Server/Client, SNTP, 100BaseFX Single-Mode  |

### Switch Properties

|                |     |
|----------------|-----|
| IGMP Groups    | 256 |
| MAC Table Size | 8 K |



|  |  |
|--|--|
| Max. No. of VLANs                      | 64   |
| Packet Buffer Size                     | 1 Mbits  |
| VLAN ID Range                          | VID 1 to 4094  |
| Priority Queues                        | 4  |
| <b>Serial Interface</b>                |  |
| Console Port                           | RS-232 (RJ45)  |
| <b>Input/Output Interface</b>          |  |
| Alarm Contact Channels                 | Resistive load: 1 A @ 24 VDC   |
| <b>Power Parameters</b>                |  |
| Connection                             | 1 removable 5-contact terminal block(s)  |
| Input Voltage                          | PT-508-24/48 Series: Redundant power inputs<br>PT-508-24 Series: 24 VDC (18 to 36 VDC)<br>PT-508-48 Series: 48 VDC (36 to 72 VDC)<br>PT-508-HV Series: 110/220 VAC/VDC (88 to 300 VAC, 85 to 264 VDC)  |
| Overload Current Protection            | Supported  |
| Reverse Polarity Protection            | Supported  |
| Input Current                          | PT-508-24 Series: 0.27 A @ 24 VDC<br>PT-508-48 Series: 0.12 A @ 48 VDC<br>PT-508-HV Series: 0.18/0.11 A @ 110/220 VAC, 0.084/0.043 A @ 110/220 VDC   |
| <b>Physical Characteristics</b>        |  |
| Housing                                | Aluminum   |
| IP Rating                              | IP40   |
| Dimensions (without ears)              | 60 x 160 x 110 mm (2.36 x 6.30 x 4.33 in)  |
| Weight                                 | 995 g (2.21 lb)  |
| Installation                           | DIN-rail mounting, DIN-rail mounting (with optional kit)   |
| <b>Environmental Limits</b>            |  |
| Operating Temperature                  | -40 to 85°C (-40 to 185°F)<br>Note: Cold start requires minimum of 100 VAC @ -40°C   |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| <b>Standards and Certifications</b>    |  |
| EMI                                    | EN 55032 Class A, CISPR 32, FCC Part 15B Class A   |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 DIPs |
| Power Substation                       | IEC 61850-3, IEEE 1613   |
| Safety                                 | UL 508   |

## MTBF

|           |                 |
|-----------|-----------------|
| Time      | 394,238 hrs     |
| Standards | Telcordia SR332 |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x PT-508 Series switch   |
| Cable            | 1 x DB9 female to RJ45 10-pin<br>1 x grounding cable   |
| Installation Kit | 1 x DIN-rail kit<br>2 x cap, plastic, for SC fiber port (PT-508-SC Series)<br>2 x cap, plastic, for ST fiber port (PT-508-ST Series)<br>2 x cap, plastic, for LC fiber port (PT-508-LC Series)<br>11 x cap, plastic, for RJ45 port |
| Documentation    | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese                                  |

## Dimensions

Unit: mm (inch)

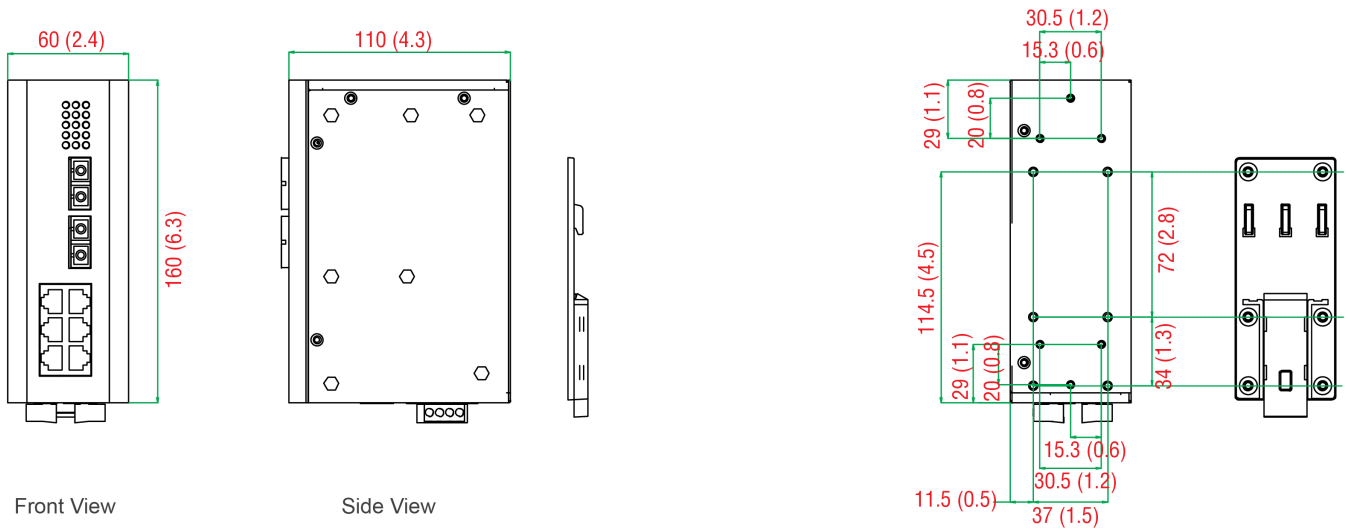

DIN-Rail Mounting Kit

## Ordering Information

| Model Name      | 10/<br>100BaseT(X) | 100BaseFX<br>Single-Mode<br>Ports with SC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with SC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with ST<br>Connector | 100BaseFX<br>Single-Mode<br>Ports with LC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with LC<br>Connector | Operating<br>Temp. | Input Voltage       |
|-----------------|--------------------|--|---|---|--|---|--------------------|---------------------|
| PT-508-SS-SC-24 | 6                  | 2  | -   | -   | -  | -   | -45 to 85°C        | 24 VDC              |
| PT-508-SS-SC-48 | 6                  | 2  | -   | -   | -  | -   | -45 to 85°C        | 48 VDC              |
| PT-508-MM-ST-HV | 6                  | -  | -   | 2   | -  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |

| Model Name          | 10/<br>100BaseT(X) | 100BaseFX<br>Single-Mode<br>Ports with SC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with SC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with ST<br>Connector | 100BaseFX<br>Single-Mode<br>Ports with LC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with LC<br>Connector | Operating<br>Temp. | Input Voltage       |
|---------------------|--------------------|--|---|---|--|---|--------------------|---------------------|
| PT-508-MM-SC-24     | 6                  | –  | 2   | –   | –  | –   | -45 to 85°C        | 24 VDC              |
| PT-508-SS-SC-HV     | 6                  | 2  | –   | –   | –  | –   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-508-MM-SC-48     | 6                  | –  | 2   | –   | –  | –   | -45 to 85°C        | 48 VDC              |
| PT-508-MM-ST-24     | 6                  | –  | –   | 2   | –  | –   | -45 to 85°C        | 24 VDC              |
| PT-508-MM-ST-48     | 6                  | –  | –   | 2   | –  | –   | -45 to 85°C        | 48 VDC              |
| PT-508-MM-SC-<br>HV | 6                  | –  | 2   | –   | –  | –   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-508-SS-LC-24     | 6                  | –  | –   | –   | 2  | –   | -45 to 85°C        | 24 VDC              |
| PT-508-SS-LC-48     | 6                  | –  | –   | –   | 2  | –   | -45 to 85°C        | 48 VDC              |
| PT-508-MM-LC-24     | 6                  | –  | –   | –   | –  | 2   | -45 to 85°C        | 24 VDC              |
| PT-508-MM-LC-48     | 6                  | –  | –   | –   | –  | 2   | -45 to 85°C        | 48 VDC              |
| PT-508-MM-LC-HV     | 6                  | –  | –   | –   | –  | 2   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-508-SS-LC-HV     | 6                  | –  | –   | –   | 2  | –   | -45 to 85°C        | 110/220 VDC/<br>VAC |

## Accessories (sold separately)

### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

### Storage Kits

|        |  |
|--------|--|
| ABC-01 | Configuration backup and restoration tool for managed Ethernet switches and AWK Series wireless APs/bridges/clients, 0 to 60°C operating temperature |
|--------|--|

© Moxa Inc. All rights reserved. Updated Jul 02, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# PT-510 Series

## IEC 61850-3 10-port Layer 2 DIN-rail managed Ethernet switches



### Features and Benefits

- IEC 61850-3 and IEEE 1613 compliant
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Easy network management by web browser, CLI, Telnet/serial console, Windows utility, and ABC-01
- Isolated universal 24 VDC or 48 VDC redundant power inputs
- Wide 110/220 VDC/VAC power supply range
- Modbus TCP, LLDP, SNMP Inform, QoS, IGMP snooping, VLAN, IEEE 802.1X, HTTPS, SNMPv3, and SSH supported
- -40 to 85°C operating temperature range

### Certifications



## Introduction

The PowerTrans PT-510 Series is designed to meet the demands of power substation automation systems (IEC 61850-3, IEEE 1613). The PT-510's optical fiber Fast Ethernet backbone, redundant ring, redundant power inputs (24 VDC or 48 VDC), and isolated power inputs (24 VDC, 48 VDC, or 110/220 VDC/VAC) increase the reliability of your communications and save on cabling/wiring costs. In addition, the DIN-rail and wall-mounting design of the PT-510 makes network planning easy, and allows greater flexibility by letting you install up to 10 Fast Ethernet ports for power distribution applications.

### Additional Features and Benefits

- Command line interface (CLI) for quickly configuring major managed functions
- VLAN Unaware: Supports priority-tagged frames to be received by specific IEDs
- EtherNet/IP and Modbus TCP industrial Ethernet protocols supported
- Configurable by Web browser, Telnet/Serial console, CLI, Windows utility, and ABC-01 automatic backup configurator
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Bandwidth management to prevent unpredictable network status
- Multi-port mirroring for online debugging
- Automatic warning by exception through email and relay output
- RMON for proactive and efficient network monitoring
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery

### Cybersecurity Features

- User passwords with multiple levels of security protect against unauthorized configuration
- SSH/HTTPS is used to encrypt passwords and data
- Lock switch ports with 802.1X port-based network access control so that only authorized clients can access the port
- RADIUS/TACACS+ allows you to manage passwords from a central location
- 802.1Q VLAN allows you to logically partition traffic transmitted between selected switch ports
- Secure switch ports so that only specific devices and/or MAC addresses can access the ports
- Disable one or more ports to block network traffic
- SNMPv3 provides encrypted authentication and access security

## Specifications

### Ethernet Interface

|   |  |
|---|--|
| 10/100BaseT(X) Ports (RJ45 connector)     | PT-510-4M Series: 6<br>PT-510-3S Series: 7<br>PT-510-MM/SS Series: 8 |
| 100BaseFX Ports (multi-mode SC connector) | PT-510-SC Series: 2  |

|  |  |
|--|--|
| 100BaseFX Ports (multi-mode ST connector)  | PT-510-MM Series: 2<br>PT-510-4M Series: 4 |
| 100BaseFX Ports (single-mode SC connector) | PT-510-SS Series: 2<br>PT-510-3S Series: 3 |
| 100BaseFX Ports (multi-mode LC connector)  | PT-510-MM Series: 2                        |
| 100BaseFX Ports (single-mode LC connector) | PT-510-SS Series: 2                        |

|               |   |                         |            |              |       |
|---------------|---|-------------------------|------------|--------------|-------|
| Optical Fiber |   |                         | 100BaseFX  |              |       |
|               |   |                         | Multi-Mode | Single-Mode  |       |
|               | Fiber Cable Type  |                         | OM1        | 50/125 μm    | G.652 |
|               |   |                         |            | 800 MHz x km |       |
|               | Typical Distance  |                         | 4 km       | 5 km         | 40 km |
|               | Wavelength  | Typical (nm)            |            | 1300         |       |
|               |   | TX Range (nm)           |            | 1260 to 1360 |       |
|               |   | RX Range (nm)           |            | 1100 to 1600 |       |
|               | Optical Power   | TX Range (dBm)          |            | -10 to -20   |       |
|               |   | RX Range (dBm)          |            | -3 to -32    |       |
|               |   | Link Budget (dB)        |            | 12           |       |
|               |   | Dispersion Penalty (dB) |            | 3            |       |
|               | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |            |              |       |

|           |  |
|-----------|--|
| Standards | <p>IEEE 802.1D-2004 for Spanning Tree Protocol<br/> IEEE 802.1p for Class of Service<br/> IEEE 802.1Q for VLAN Tagging<br/> IEEE 802.1s for Multiple Spanning Tree Protocol<br/> IEEE 802.1w for Rapid Spanning Tree Protocol<br/> IEEE 802.1X for authentication<br/> IEEE 802.3 for 10BaseT<br/> IEEE 802.3ab for 1000BaseT(X)<br/> IEEE 802.3ad for Port Trunk with LACP<br/> IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/> IEEE 802.3x for flow control</p> |
|-----------|--|

|                                   |   |
|-----------------------------------|---|
| <b>Ethernet Software Features</b> |   |
| Filter                            | 802.1Q, GMRP, GVRP, IGMP v1/v2c, Port-based VLAN, VLAN unaware  |
| Industrial Protocols              | EtherNet/IP, Modbus TCP   |
| Management                        | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, HTTP, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP |
| MIB                               | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols              | MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2  |
| Security                          | HTTPS/SSL, TACACS+, Port Lock, RADIUS, Rate Limit, SSH  |
| Time Management                   | NTP Server/Client, SNTP   |

## Switch Properties

|                    |               |
|--------------------|---------------|
| IGMP Groups        | 256           |
| MAC Table Size     | 8 K           |
| Max. No. of VLANs  | 64            |
| Packet Buffer Size | 1 Mbits       |
| VLAN ID Range      | VID 1 to 4094 |
| Priority Queues    | 4             |

## Serial Interface

|              |               |
|--------------|---------------|
| Console Port | RS-232 (RJ45) |
|--------------|---------------|

## Input/Output Interface

|                        |                              |
|------------------------|------------------------------|
| Alarm Contact Channels | Resistive load: 1 A @ 24 VDC |
|------------------------|------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 1 removable 5-contact terminal block(s)   |
| Input Voltage               | PT-510-24/48 Series: Redundant power inputs<br>PT-510-24 Series: 24 VDC (18 to 36 VDC)<br>PT-510-48 Series: 48 VDC (36 to 72 VDC)<br>PT-510-HV Series: 110/220 VAC/VDC (88 to 300 VAC, 85 to 264 VDC) |
| Overload Current Protection | Supported   |
| Reverse Polarity Protection | Supported   |
| Input Current               | PT-510-24 Series: 0.39 A @ 24 VDC<br>PT-510-48 Series: 0.18 A @ 48 VDC<br>PT-510-HV Series: 0.234/0.148 A @ 110/220 VAC, 0.10/0.052 A @ 110/220 VDC   |

## Physical Characteristics

|                           |   |
|---------------------------|---|
| Housing                   | Aluminum                                  |
| IP Rating                 | IP40                                      |
| Dimensions (without ears) | 80 x 160 x 110 mm (3.15 x 6.30 x 4.33 in) |
| Weight                    | 1210 g (2.69 lb)                          |
| Installation              | DIN-rail mounting (with optional kit)     |

## Environmental Limits

|  |  |
|--|--|
| Operating Temperature                  | -40 to 85°C (-40 to 185°F)<br>Note: Cold start requires minimum of 100 VAC @ -40°C |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |


## Standards and Certifications

|     |  |
|-----|--|
| EMI | EN 55032 Class A, CISPR 32, FCC Part 15B Class A   |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 35 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 DIPs |

|                         |   |
|-------------------------|---|
| Power Substation        | IEC 61850-3, IEEE 1613  |
| Safety                  | UL 508  |
| <b>MTBF</b>             |   |
| Time                    | 372,276 hrs   |
| Standards               | Telcordia SR332   |
| <b>Warranty</b>         |   |
| Warranty Period         | 5 years   |
| Details                 | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>  |
| <b>Package Contents</b> |   |
| Device                  | 1 x PT-510 Series switch  |
| Cable                   | 1 x DB9 female to RJ45 10-pin<br>1 x grounding cable  |
| Installation Kit        | 1 x DIN-rail kit (PT-510 Series)<br>12 x cap, plastic, for RJ45 port (PT-510-3S Series)<br>13 x cap, plastic, for RJ45 port (PT-510-MM/SS Series)<br>11 x cap, plastic, for RJ45 port (PT-510-4M Series)<br>3 x cap, plastic, for SC fiber port (PT-510-3S-SC Series)<br>2 x cap, plastic, for SC fiber port (PT-510-MM-SC/SS-SC Series)<br>4 x cap, plastic, for ST fiber port (PT-510-4M Series)<br>2 x cap, plastic, for ST fiber port (PT-510-MM-ST Series)<br>2 x cap, plastic, for LC fiber port (PT-510-LC Series) |
| Documentation           | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese   |

## Dimensions

Unit: mm

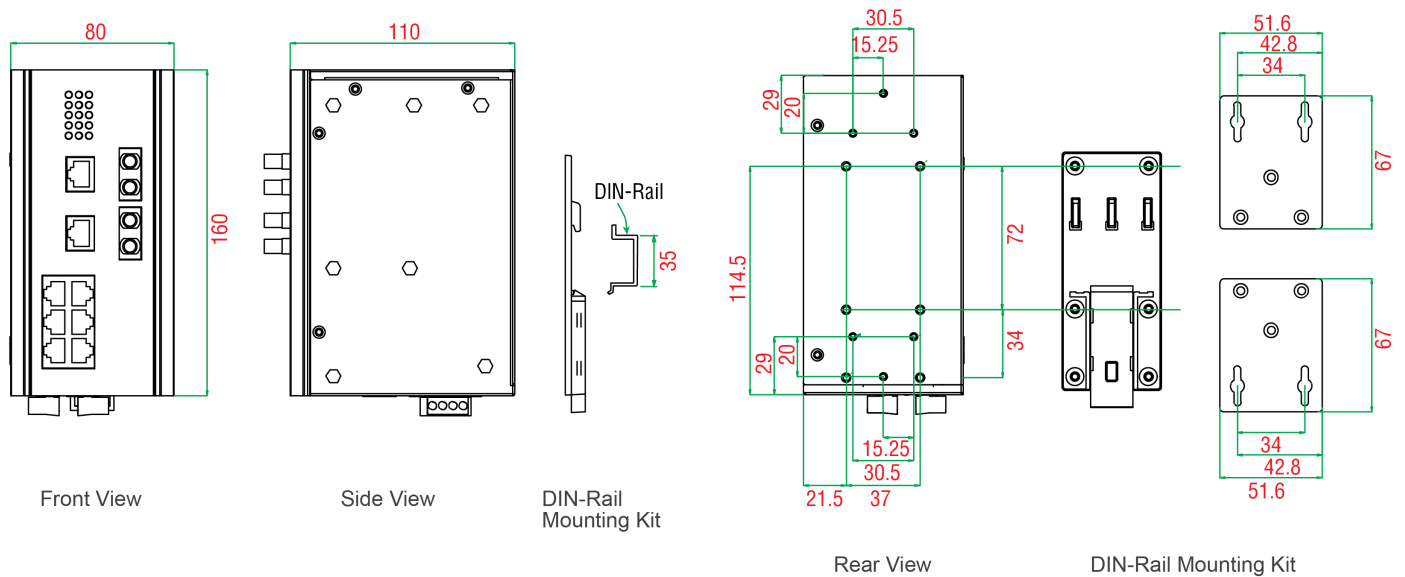

## Ordering Information

| Model Name      | 10/<br>100BaseT(X) | 100BaseFX<br>Single-Mode<br>Ports with SC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with SC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with ST<br>Connector | 100BaseFX<br>Single-Mode<br>Ports with LC<br>Connector | 100BaseFX<br>Multi-Mode<br>Ports with LC<br>Connector | Operating<br>Temp. | Input Voltage       |
|-----------------|--------------------|--|---|---|--|---|--------------------|---------------------|
| PT-510-SS-SC-24 | 8                  | 2  | -   | -   | -  | -   | -45 to 85°C        | 24 VDC              |
| PT-510-SS-SC-48 | 8                  | 2  | -   | -   | -  | -   | -45 to 85°C        | 48 VDC              |
| PT-510-MM-SC-24 | 8                  | -  | 2   | -   | -  | -   | -45 to 85°C        | 24 VDC              |
| PT-510-MM-SC-48 | 8                  | -  | 2   | -   | -  | -   | -45 to 85°C        | 48 VDC              |
| PT-510-MM-ST-24 | 8                  | -  | -   | 2   | -  | -   | -45 to 85°C        | 24 VDC              |
| PT-510-MM-ST-48 | 8                  | -  | -   | 2   | -  | -   | -45 to 85°C        | 48 VDC              |
| PT-510-SS-LC-24 | 8                  | -  | -   | -   | 2  | -   | -45 to 85°C        | 24 VDC              |
| PT-510-SS-LC-48 | 8                  | -  | -   | -   | 2  | -   | -45 to 85°C        | 48 VDC              |
| PT-510-MM-LC-24 | 8                  | -  | -   | -   | -  | 2   | -45 to 85°C        | 24 VDC              |
| PT-510-MM-LC-48 | 8                  | -  | -   | -   | -  | 2   | -45 to 85°C        | 48 VDC              |
| PT-510-SS-SC-HV | 8                  | 2  | -   | -   | -  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-510-MM-SC-HV | 8                  | -  | 2   | -   | -  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-510-MM-ST-HV | 8                  | -  | -   | 2   | -  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-510-MM-LC-HV | 8                  | -  | -   | -   | -  | 2   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-510-SS-LC-HV | 8                  | -  | -   | -   | 2  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-510-3S-SC-HV | 7                  | 3  | -   | -   | -  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |
| PT-510-3S-SC-24 | 7                  | 3  | -   | -   | -  | -   | -45 to 85°C        | 24 VDC              |
| PT-510-3S-SC-48 | 7                  | 3  | -   | -   | -  | -   | -45 to 85°C        | 48 VDC              |
| PT-510-4M-ST-24 | 6                  | -  | -   | 4   | -  | -   | -45 to 85°C        | 24 VDC              |
| PT-510-4M-ST-48 | 6                  | -  | -   | 4   | -  | -   | -45 to 85°C        | 48 VDC              |
| PT-510-4M-ST-HV | 6                  | -  | -   | 4   | -  | -   | -45 to 85°C        | 110/220 VDC/<br>VAC |

## Accessories (sold separately)

### Software

MXview

Industrial network management software designed for converged automation networks



© Moxa Inc. All rights reserved. Updated May 16, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# PT-7528 Series


## IEC 61850-3 28-port Layer 2 managed rackmount Ethernet switches



### Features and Benefits

- IEC 61850-3, IEEE 1613 (power substations) compliant
- Built-in MMS server based on IEC 61850-90-4 switch data modeling for power SCADA
- Noise Guard™ wire speed zero packet loss technology
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- Isolated redundant power inputs with universal 24 VDC, 48 VDC, or 110/220 VDC/VAC power supply range
- -40 to 85°C operating temperature range

### Certifications



## Introduction

The PT-7528 Series is designed for power substation automation applications that operate in extremely harsh environments. The PT-7528 Series supports Moxa's Noise Guard technology, is compliant with IEC 61850-3, and its EMC immunity exceeds IEEE 1613 Class 2 standards to ensure zero packet loss while transmitting at wire speed. The PT-7528 Series also features critical packet prioritization (GOOSE and SMVs), a built-in MMS server, and a configuration wizard designed specifically for substation automation.

With Gigabit Ethernet, redundant ring, and 110/220 VDC/VAC isolated redundant power supplies, the PT-7528 Series further increases the reliability of your communications and saves cabling/wiring costs. The wide range of PT-7528 models available support multiple types of port configuration, with up to 28 copper or 24 fiber ports, and up to 4 Gigabit ports. Taken together, these features allow greater flexibility, making the PT-7528 Series suitable for a variety of industrial applications.

### Additional Features and Benefits

- Switch data modeling based on the IEC 61850-90-4 standard
- Fiber Check™ provides monitoring and diagnosis functions on MST/MSC/SSC/SFP fiber ports
- VLAN Unaware: Supports priority-tagged frames to be received by specific IEDs
- EtherNet/IP and Modbus TCP industrial Ethernet protocols supported
- Configurable by web browser, Telnet/Serial console, CLI, Windows utility, and ABC-02 automatic backup configurator
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),<sup>1</sup> RSTP/STP, and MSTP for network redundancy
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Bandwidth management to prevent unpredictable network status
- Multiport mirroring for online debugging
- Automatic warning by exception through email and relay output
- RMON for proactive and efficient network monitoring
- Automatic recovery of connected device's IP addresses
- Line-swap fast recovery
- Noise Guard™ provides a high level of EMC immunity for critical applications, exceeding IEEE 1613 Class 2

### Cybersecurity Features

- User passwords with multiple levels of security protect against unauthorized configuration
- SSH/HTTPS is used to encrypt passwords and data
- Lock switch ports with 802.1X port-based network access control so that only authorized clients can access the port
- RADIUS/TACACS+ allows you to manage passwords from a central location
- 802.1Q VLAN allows you to logically partition traffic transmitted between selected switch ports
- Secure switch ports so that only specific devices and/or MAC addresses can access the ports
- Disable one or more ports to block network traffic
- SNMPv3 provides encrypted authentication and access security

1. Gigabit Ethernet recovery time < 50 ms

## Specifications

### Ethernet Interface

| 10/100BaseT(X) Ports (RJ45 connector)      | PT-7528-4TX Series: 4<br>PT-7528-8TX Series: 8<br>PT-7528-12TX Series: 12<br>PT-7528-16TX Series: 16<br>PT-7528-24TX Series: 24   |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|--|---|--------------|-------|--------------|--------------|--|--|------------|--|-------------|--|------------------|-----|-----------|-------|--|--------------|------------------|--|------|------|-------|-------|-------------|--------------|------|--|------|------|---------------|--------------|--|--------------|--------------|---------------|--------------|--|--------------|--------------|---------------|----------------|-------------|--|---------|---------|----------------|-----------|--|-----------|-----------|------------------|----|--|----|----|-------------------------|---|--|---|---|
| 1000BaseSFP Slots                          | PT-7528-4GSFP Series: 4   |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| 100BaseFX Ports (multi-mode SC connector)  | PT-7528-8MSC Series: 8<br>PT-7528-12MSC Series: 12<br>PT-7528-16MSC Series: 16<br>PT-7528-20MSC Series: 20  |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| 100BaseFX Ports (multi-mode ST connector)  | PT-7528-8MST Series: 8<br>PT-7528-12MST Series: 12<br>PT-7528-16MST Series: 16<br>PT-7528-20MST Series: 20  |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| 100BaseFX Ports (single-mode SC connector) | PT-7528-8SSC Series: 8  |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Optical Fiber                              | <table border="1"> <thead> <tr> <th colspan="2" rowspan="2"></th> <th colspan="4">100BaseFX</th> </tr> <tr> <th colspan="2">Multi-Mode</th> <th colspan="2">Single-Mode</th> </tr> <tr> <th rowspan="2">Fiber Cable Type</th> <th rowspan="2">OM1</th> <th>50/125 μm</th> <th colspan="2" rowspan="2">G.652</th> </tr> <tr> <th>800 MHz x km</th> </tr> </thead> <tbody> <tr> <td colspan="2">Typical Distance</td> <td>4 km</td> <td>5 km</td> <td>40 km</td> <td>80 km</td> </tr> <tr> <td rowspan="3">Wave-length</td> <td>Typical (nm)</td> <td colspan="2">1300</td> <td>1310</td> <td>1550</td> </tr> <tr> <td>TX Range (nm)</td> <td colspan="2">1260 to 1360</td> <td>1280 to 1340</td> <td>1530 to 1570</td> </tr> <tr> <td>RX Range (nm)</td> <td colspan="2">1100 to 1600</td> <td>1100 to 1600</td> <td>1100 to 1600</td> </tr> <tr> <td rowspan="4">Optical Power</td> <td>TX Range (dBm)</td> <td colspan="2">-14 to -20*</td> <td>0 to -5</td> <td>0 to -5</td> </tr> <tr> <td>RX Range (dBm)</td> <td colspan="2">-3 to -32</td> <td>-3 to -34</td> <td>-3 to -34</td> </tr> <tr> <td>Link Budget (dB)</td> <td colspan="2">12</td> <td>29</td> <td>29</td> </tr> <tr> <td>Dispersion Penalty (dB)</td> <td colspan="2">3</td> <td>1</td> <td>1</td> </tr> </tbody> </table> <p>*This range only applies to the PT-7528 multi-mode SC and ST fiber modules.</p> <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |              |       | 100BaseFX    |              |  |  | Multi-Mode |  | Single-Mode |  | Fiber Cable Type | OM1 | 50/125 μm | G.652 |  | 800 MHz x km | Typical Distance |  | 4 km | 5 km | 40 km | 80 km | Wave-length | Typical (nm) | 1300 |  | 1310 | 1550 | TX Range (nm) | 1260 to 1360 |  | 1280 to 1340 | 1530 to 1570 | RX Range (nm) | 1100 to 1600 |  | 1100 to 1600 | 1100 to 1600 | Optical Power | TX Range (dBm) | -14 to -20* |  | 0 to -5 | 0 to -5 | RX Range (dBm) | -3 to -32 |  | -3 to -34 | -3 to -34 | Link Budget (dB) | 12 |  | 29 | 29 | Dispersion Penalty (dB) | 3 |  | 1 | 1 |
|  |   |              |       | 100BaseFX    |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  |   | Multi-Mode   |       | Single-Mode  |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Fiber Cable Type                           | OM1   | 50/125 μm    | G.652 |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  |   | 800 MHz x km |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Typical Distance                           |   | 4 km         | 5 km  | 40 km        | 80 km        |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Wave-length                                | Typical (nm)  | 1300         |       | 1310         | 1550         |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  | TX Range (nm)   | 1260 to 1360 |       | 1280 to 1340 | 1530 to 1570 |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  | RX Range (nm)   | 1100 to 1600 |       | 1100 to 1600 | 1100 to 1600 |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Optical Power                              | TX Range (dBm)  | -14 to -20*  |       | 0 to -5      | 0 to -5      |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  | RX Range (dBm)  | -3 to -32    |       | -3 to -34    | -3 to -34    |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  | Link Budget (dB)  | 12           |       | 29           | 29           |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
|  | Dispersion Penalty (dB)   | 3            |       | 1            | 1            |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Cabling Direction                          | Front cabling   |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Compatible Modules                         | PT-7528-24TX Series:<br>Slot 1: PM-7500-2GTXSFP, PM-7500-4GTXSFP, PM-7500-2MSC/4MSC, PM-7500-2MST/4MST, PM-7500-2SSC/4SSC   |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |
| Standards                                  | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX   |              |       |              |              |  |  |            |  |             |  |                  |     |           |       |  |              |                  |  |      |      |       |       |             |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |             |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Filter               | 802.1Q, GMRP, GVRP, IGMP v1/v2c, Port-based VLAN, VLAN unaware   |
| Industrial Protocols | EtherNet/IP, Modbus TCP  |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Option 66/67/82, DHCP Server/Client, Flow control, HTTP, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, Fiber check |
| MIB                  | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB  |
| Power Substation     | IEC 61850 QoS, MMS, Configuration Wizard   |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2   |
| Security             | Broadcast storm protection, HTTPS/SSL, TACACS+, Port Lock, RADIUS, Rate Limit, SSH   |
| Time Management      | NTP Server/Client, SNTP  |

## Switch Properties

|                     |               |
|---------------------|---------------|
| IGMP Groups         | 256           |
| Jumbo Frame Size    | 9.6 KB        |
| Max. No. of VLANs   | 256           |
| VLAN ID Range       | VID 1 to 4094 |
| Priority Queues     | 4             |
| Switching Capacity  | 12.8 Gbps     |
| Forwarding Capacity | 12.8 Gbps     |

## USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

## Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

## Input/Output Interface

|                        |                                       |
|------------------------|---------------------------------------|
| Alarm Contact Channels | Resistive load: 3 A @ 30 VDC, 240 VAC |
|------------------------|---------------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 10-pin terminal block   |
| Input Voltage               | PT-7528-HV-HV/WV-WV/WV-HV Series: Redundant power modules<br>PT-7528-WV Series: 24/48 VDC (18 to 72 VDC)<br>PT-7528-HV Series: 110/220 VAC/VDC (85 to 264 VAC, 88 to 300 VDC)   |
| Input Current               | For models with fewer than 8 fiber ports:<br>PT-7528-WV Series: 0.741 A @ 24 VDC, 0.364 A @ 48 VDC<br>PT-7528-HV Series: 0.147/0.077 A @ 110/220 VDC, 0.283/0.190 A @ 110/220 VAC<br><br>For models with 8 or more fiber ports:<br>PT-7528-WV Series: 1.428 A @ 24 VDC, 0.735 A @ 48 VDC<br>PT-7528-HV Series: 0.586/0.382 A @ 110/220 VAC, 0.313/0.167 A @ 110/220 VDC |
| Overload Current Protection | Supported   |
| Reverse Polarity Protection | Supported   |

## Physical Characteristics

|                           |   |
|---------------------------|---|
| Housing                   | Aluminum                                    |
| IP Rating                 | IP40  |
| Dimensions (without ears) | 440 x 44 x 325 mm (17.32 x 1.73 x 12.80 in) |
| Weight                    | 4900 g (10.89 lb)                           |
| Installation              | 19-inch rack mounting                       |

## Environmental Limits

|  |  |
|--|--|
| Operating Temperature                  | -40 to 85°C (-40 to 185°F)<br>Note: Cold start requires minimum of 100 VAC @ -40°C |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|                  |  |
|------------------|--|
| Safety           | UL 508   |
| EMI              | EN 55032 Class A, CISPR 32, FCC Part 15B Class A   |
| EMS              | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 35 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 DIPs |
| Power Substation | IEC 61850-3, IEEE 1613 Class 2, Note: Models with MCS and SSC fiber ports are compliant with IEEE 1613 Class 1   |
| Railway          | EN 50121-4   |
| Traffic Control  | NEMA TS2   |

## MTBF

|           |                 |
|-----------|-----------------|
| Time      | 771,320 hrs     |
| Standards | Telcordia SR332 |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x PT-7528 Series switch  |
| Cable            | 1 x USB type A male to USB type B male   |
| Installation Kit | 4 x cap, plastic, for RJ45 port<br>4 x cap, plastic, for SFP slot<br>2 x rack-mounting ear |

|               |   |
|---------------|---|
| Documentation | 1 x document and software CD<br>1 x quick installation guide<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese<br>1 x warranty card |
| Note          | SFP modules and/or modules from the PM-7500 Module Series need to be purchased separately for use with this product.  |

## Dimensions

Unit: mm (inch)

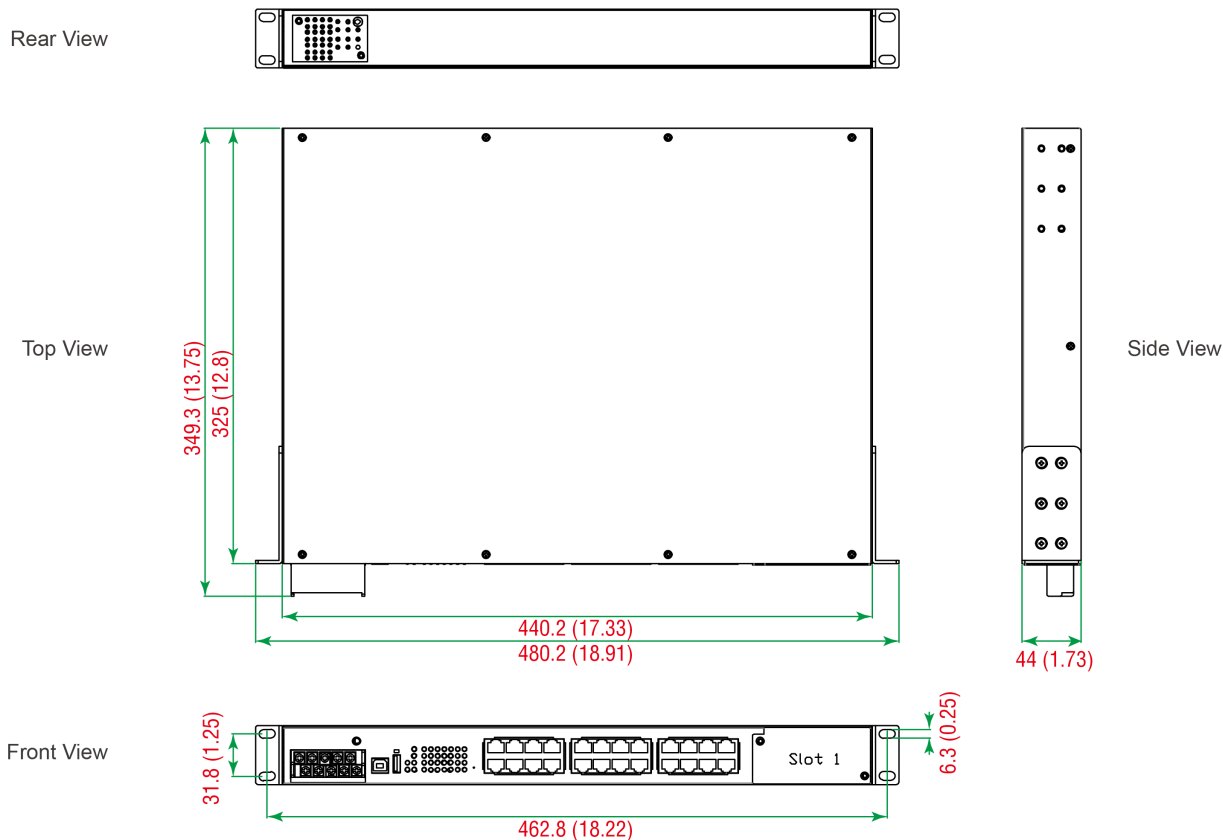

## Ordering Information

| Model Name                    | 1000Base SFP Slots | 10/100BaseT(X) | 100BaseFX                    | Input Voltage 1  | Input Voltage 2  | Redundant Power Module | Operating Temp. |
|-------------------------------|--------------------|----------------|------------------------------|------------------|------------------|------------------------|-----------------|
| PT-7528-24TX-WV-HV            | -                  | 24             | -                            | 24/48 VDC        | 110/220 VDC/ VAC | ✓                      | -45 to 85°C     |
| PT-7528-24TX-WV               | -                  | 24             | -                            | 24/48 VDC        | -                | -                      | -45 to 85°C     |
| PT-7528-24TX-HV               | -                  | 24             | -                            | 110/220 VDC/ VAC | -                | -                      | -45 to 85°C     |
| PT-7528-24TX-WV-WV            | -                  | 24             | -                            | 24/48 VDC        | 24/48 VDC        | ✓                      | -45 to 85°C     |
| PT-7528-24TX-HV-HV            | -                  | 24             | -                            | 110/220 VDC/ VAC | 110/220 VDC/ VAC | ✓                      | -45 to 85°C     |
| PT-7528-8MSC-16TX-4GSFP-WV    | 4                  | 16             | 8 x multi-mode, SC connector | 24/48 VDC        | -                | -                      | -45 to 85°C     |
| PT-7528-8MSC-16TX-4GSFP-WV-WV | 4                  | 16             | 8 x multi-mode, SC connector | 24/48 VDC        | 24/48 VDC        | ✓                      | -45 to 85°C     |
| PT-7528-8MSC-16TX-4GSFP-HV    | 4                  | 16             | 8 x multi-mode, SC connector | 110/220 VDC/ VAC | -                | -                      | -45 to 85°C     |

| Model Name                     | 1000Base SFP Slots | 10/100BaseT(X) | 100BaseFX                     | Input Voltage 1 | Input Voltage 2 | Redundant Power Module | Operating Temp. |
|--------------------------------|--------------------|----------------|-------------------------------|-----------------|-----------------|------------------------|-----------------|
| PT-7528-8MSC-16TX-4GSFP-HV-HV  | 4                  | 16             | 8 x multi-mode, SC connector  | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-12MSC-12TX-4GSFP-WV    | 4                  | 12             | 12 x multi-mode, SC connector | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-12MSC-12TX-4GSFP-WV-WV | 4                  | 12             | 12 x multi-mode, SC connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-12MSC-12TX-4GSFP-HV    | 4                  | 12             | 12 x multi-mode, SC connector | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |
| PT-7528-12MSC-12TX-4GSFP-HV-HV | 4                  | 12             | 12 x multi-mode, SC connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-16MSC-8TX-4GSFP-WV     | 4                  | 8              | 16 x multi-mode, SC connector | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-16MSC-8TX-4GSFP-WV-WV  | 4                  | 8              | 16 x multi-mode, SC connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-16MSC-8TX-4GSFP-HV     | 4                  | 8              | 16 x multi-mode, SC connector | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |
| PT-7528-16MSC-8TX-4GSFP-HV-HV  | 4                  | 8              | 16 x multi-mode, SC connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-20MSC-4TX-4GSFP-WV     | 4                  | 4              | 20 x multi-mode, SC connector | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-20MSC-4TX-4GSFP-WV-WV  | 4                  | 4              | 20 x multi-mode, SC connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-20MSC-4TX-4GSFP-HV     | 4                  | 4              | 20 x multi-mode, SC connector | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |
| PT-7528-20MSC-4TX-4GSFP-HV-HV  | 4                  | 4              | 20 x multi-mode, SC connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-8SSC-16TX-4GSFP-WV-WV  | 4                  | 16             | 8 x single-mode, SC connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-8SSC-16TX-4GSFP-HV-HV  | 4                  | 16             | 8 x single-mode, SC connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-8MST-16TX-4GSFP-WV     | 4                  | 16             | 8 x multi-mode, ST connector  | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-8MST-16TX-4GSFP-WV-WV  | 4                  | 16             | 8 x multi-mode, ST connector  | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-8MST-16TX-4GSFP-HV     | 4                  | 16             | 8 x multi-mode, ST connector  | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |
| PT-7528-8MST-16TX-4GSFP-HV-HV  | 4                  | 16             | 8 x multi-mode, ST connector  | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-12MST-12TX-4GSFP-WV    | 4                  | 12             | 12 x multi-mode, ST connector | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-12MST-12TX-4GSFP-WV-WV | 4                  | 12             | 12 x multi-mode, ST connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-12MST-12TX-4GSFP-HV    | 4                  | 12             | 12 x multi-mode, ST connector | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |
| PT-7528-12MST-12TX-4GSFP-HV-HV | 4                  | 12             | 12 x multi-mode, ST connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-16MST-8TX-4GSFP-WV     | 4                  | 8              | 16 x multi-mode, ST connector | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-16MST-8TX-4GSFP-WV-WV  | 4                  | 8              | 16 x multi-mode, ST connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-16MST-8TX-4GSFP-HV     | 4                  | 8              | 16 x multi-mode, ST connector | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |

| Model Name                    | 1000Base SFP Slots | 10/100BaseT(X) | 100BaseFX                     | Input Voltage 1 | Input Voltage 2 | Redundant Power Module | Operating Temp. |
|-------------------------------|--------------------|----------------|-------------------------------|-----------------|-----------------|------------------------|-----------------|
| PT-7528-16MST-8TX-4GSFP-HV-HV | 4                  | 8              | 16 x multi-mode, ST connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |
| PT-7528-20MST-4TX-4GSFP-WV    | 4                  | 4              | 20 x multi-mode, ST connector | 24/48 VDC       | -               | -                      | -45 to 85°C     |
| PT-7528-20MST-4TX-4GSFP-WV-WV | 4                  | 4              | 20 x multi-mode, ST connector | 24/48 VDC       | 24/48 VDC       | ✓                      | -45 to 85°C     |
| PT-7528-20MST-4TX-4GSFP-HV    | 4                  | 4              | 20 x multi-mode, ST connector | 110/220 VDC/VAC | -               | -                      | -45 to 85°C     |
| PT-7528-20MST-4TX-4GSFP-HV-HV | 4                  | 4              | 20 x multi-mode, ST connector | 110/220 VDC/VAC | 110/220 VDC/VAC | ✓                      | -45 to 85°C     |

## Accessories (sold separately)

### PM-7500 Module Series

|                 |   |
|-----------------|---|
| PM-7500-2GTXSFP | Gigabit Ethernet module with 2 100/1000BaseSFP slots or 2 100/1000BaseT(X) ports. compliant with IEC 61850-3. -40 to 85°C operating temperature |
| PM-7500-2MSC    | Fast Ethernet module with 2 100BaseFX multi-mode ports with SC connectors. compliant with IEC 61850-3. -40 to 85°C operating temperature        |
| PM-7500-2MST    | Fast Ethernet module with 2 100BaseFX multi-mode ports with ST connectors. compliant with IEC 61850-3. -40 to 85°C operating temperature        |
| PM-7500-2SSC    | Fast Ethernet module with 2 100BaseFX single-mode ports with SC connectors. compliant with IEC 61850-3. -40 to 85°C operating temperature       |
| PM-7500-4GTXSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots or 4 100/1000BaseT(X) ports. compliant with IEC 61850-3. -40 to 85°C operating temperature |
| PM-7500-4MSC    | Fast Ethernet module with 4 100BaseFX multi-mode ports with SC connectors. compliant with IEC 61850-3. -40 to 85°C operating temperature        |
| PM-7500-4MST    | Fast Ethernet module with 4 100BaseFX multi-mode ports with ST connectors. compliant with IEC 61850-3. -40 to 85°C operating temperature        |
| PM-7500-4SSC    | Fast Ethernet module with 4 100BaseFX single-mode ports with SC connectors. compliant with IEC 61850-3. -40 to 85°C operating temperature       |

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |
|--------------|---|

### SFP Modules

|               |  |
|---------------|--|
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |



|                |  |
|----------------|--|
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |

#### Software

|                   |  |
|-------------------|--|
| MXview-50         | Industrial network management software with a license for 50 nodes (by IP address)             |
| MXview-100        | Industrial network management software with a license for 100 nodes (by IP address)            |
| MXview-250        | Industrial network management software with a license for 250 nodes (by IP address)            |
| MXview-500        | Industrial network management software with a license for 500 nodes (by IP address)            |
| MXview-1000       | Industrial network management software with a license for 1000 nodes (by IP address)           |
| MXview-2000       | Industrial network management software with a license for 2000 nodes (by IP address)           |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# PT-G503 Series

## IEC 61850-3/62439-3 3-port full Gigabit managed redundancy boxes



### Features and Benefits

- IEC 61850-3, IEEE 1613 (power substations) compliant
- IEC 62439-3 Clause 4 (PRP) and Clause 5 (HSR) compliant
- PRP/HSR Coupling and QuadBox functions supported
- Ethernet console reserved for local access
- Built-in MMS server based on IEC 61850-90-4 switch data modeling for power SCADA
- Hardware-based IEEE 1588v2 PTP supported
- Design ready for NERC CIP compliant system development
- Isolated redundant power inputs with universal 24 VDC, 48 VDC, or 110/220 VDC/VAC power supply range
- -40 to 85°C operating temperature range

### Certifications



## Introduction

The PT-G503-PHR-PTP Series redundancy boxes (RedBoxes) are compliant with the latest standardized redundancy protocols for industrial automation networks, IEC 62439-3 Clause 4 (Parallel Redundancy Protocol, PRP) and IEC 62439-3 Clause 5 (High-availability Seamless Redundancy, HSR). PRP/HSR ensures the highest system availability and data integrity for mission-critical applications in electrical substation and/or process automation systems that require zero recovery time redundancy. The redundant protocols Coupling and QuadBox are also supported. With Coupling and QuadBox, HSR rings can be connected to make the redundant network more versatile. The PT-G503-PHR-PTP Series comes with three 10/100/1000BaseT(X) and 100/1000BaseSFP slot combo ports.

One slot (INTERLINK port) is for an internal link for connecting with a SAN (Singly Attached Node). The other two ports (LAN A and LAN B ports) are for PRP/HSR redundant protocol communications. With this full Gigabit Ethernet port design, the PT-G503-PHR-PTP Series provides high performance for PRP/HSR systems.

The PT-G503-PHR-PTP Series also provides IEEE 1588v2 PTP in end-to-end one-step transparent clock mode for timing-critical applications and isolated redundant power inputs with 24/48 VDC or 110/220 VDC/VAC power supply ranges to increase the reliability of the power supply.

### Additional Features and Benefits

- PRP (Parallel Redundancy Protocol): Transmit or receive two independent active paths to/from different LANs simultaneously on a zero recovery time network
- HSR (High-availability Seamless Redundancy): Every frame is duplicated and then transmitted in both directions of the HSR ring to deliver zero switchover time
- PRP/HSR coupling: Supports coupling from an HSR ring node to redundant PRP LANs (Up to 7 PRP LANs)
- QuadBox function: Supports peer coupling of rings via interconnecting two INTERLINK ports on two separate RedBoxes
- Fiber Check™ provides monitoring and diagnosis functionality on SFP fiber ports
- Hardware-based IEEE 1588v2 PTP (Precision Time Protocol) end-to-end one-step transparent clock for precise time synchronization of networks
- Automatic warning by exception through email and relay output
- Configurable via web browser, CLI, Windows utility, and ABC-02 automatic backup configurator

## Specifications

### Ethernet Interface

|   |  |
|---|--|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 3  |
| Console Port  | Ethernet console (10/100/1000Mbps RJ45)  |
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Filter               | Static Multicast  |
| Industrial Protocols | Modbus TCP  |
| Management           | Back Pressure Flow Control, BOOTP, DHCP Client, Fiber check, Flow control, HTTP, IPv4/IPv6, LLDP, Port Mirror, RARP, RMON, SMTP, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet |
| Power Substation     | MMS   |
| Redundancy Protocols | HSR, PRP, RSTP grouping   |
| Security             | HTTPS/SSL, TACACS+, RADIUS, SSH, Trust access control   |
| Time Management      | NTP Server/Client, SNTP, IEEE 1588v2 PTP (hardware-based)   |
| MIB                  | IEC 62439-3 MIB   |

### USB Interface

|              |            |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

### Serial Interface

|              |                                       |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

### Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | Resistive load: 1 A @ 24 VDC  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

### Power Parameters

|                             |  |
|-----------------------------|--|
| Input Voltage               | PT-G503-PHR-PTP-HV:<br>Redundant dual inputs<br>110/220 VAC/VDC (85 to 264 VAC, 88 to 300 VDC)<br><br>PT-G503-PHR-PTP-WV:<br>Redundant dual inputs<br>24/48 VDC (18 to 72 VDC) |
| Overload Current Protection | Supported  |
| Reverse Polarity Protection | Supported  |
| Input Current               | PT-G503-PHR-PTP-HV: 0.260/0.170 A @ 110/220 VAC<br>PT-G503-PHR-PTP-HV: 0.150/0.080 A @ 110/220 VDC<br>PT-G503-PHR-PTP-WV: 0.660/0.360 A @ 24/48 VDC                            |
| Power Connector             | 1 removable 5-contact terminal block(s)  |

## Physical Characteristics

|                           |   |
|---------------------------|---|
| Housing                   | Aluminum                                  |
| IP Rating                 | IP40                                      |
| Dimensions (without ears) | 80 x 160 x 110 mm (3.15 x 6.30 x 4.33 in) |
| Weight                    | 1210 g (2.69 lb)                          |
| Installation              | DIN-rail mounting                         |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 85°C (-40 to 185°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|                  |  |
|------------------|--|
| Safety           | UL 508   |
| EMI              | EN 55032 Class A, CISPR 32, FCC Part 15B Class A   |
| EMS              | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 35 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 DIPs |
| Power Substation | IEC 61850-3, IEEE 1613   |
| Railway          | EN 50121-4   |

## MTBF

|           |  |
|-----------|--|
| Time      | PT-G503-PHR-PTP-HV: 566,844 hrs<br>PT-G503-PHR-PTP-WV: 440,857 hrs |
| Standards | Telcordia (Bellcore) Standard TR/SR                                |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents


|                  |   |
|------------------|---|
| Device           | 1 x PT-G503 Series switch   |
| Cable            | 1 x USB type A male to USB type B male  |
| Installation Kit | 1 x DIN-rail kit<br>1 x cap, for type A USB port<br>4 x cap, plastic, for RJ45 port<br>1 x cap, plastic, for console port<br>3 x cap, plastic, for SFP slot                                       |
| Documentation    | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x product notice, Simplified Chinese |
| Note             | SFP modules need to be purchased separately for use with this product.  |

## Dimensions


Unit: mm (inch)

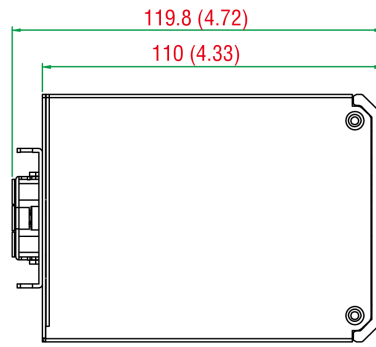


Top View

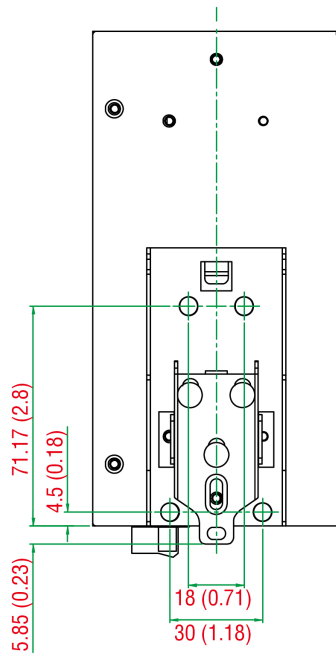


Rear View

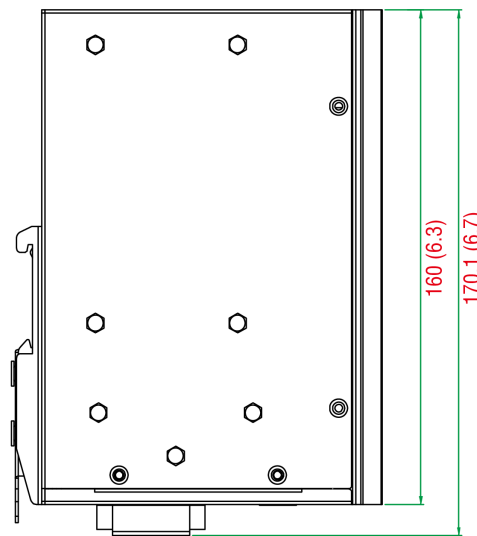

Side View

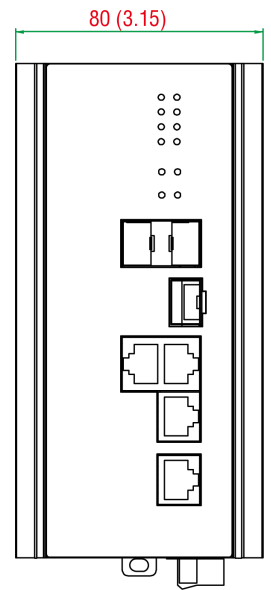

Front View

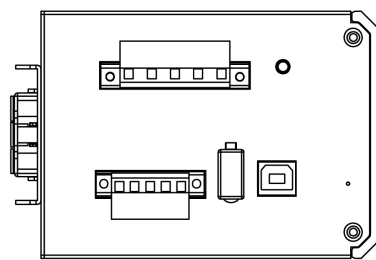

Bottom View

## Ordering Information

| Model Name         | Max. No. of Ports | Max. No. of Gigabit Ports | Combo Ports<br>10/100/1000BaseT(X)<br>or 100/1000BaseSFP | Input Voltage   | Operating Temp. |
|--------------------|-------------------|---------------------------|--|-----------------|-----------------|
| PT-G503-PHR-PTP-WW | 3                 | 3                         | 3  | 24/48 VDC       | -45 to 85°C     |
| PT-G503-PHR-PTP-HV | 3                 | 3                         | 3  | 110/220 VDC/VAC | -45 to 85°C     |

## Accessories (sold separately)

### Software

|        |   |
|--------|---|
| MXview | Industrial network management software designed for converged automation networks |
|--------|---|

### SFP Modules

|                 |  |
|-----------------|--|
| SFP-1FELLC-T    | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T    | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T    | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC     | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature  |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC      | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |

|              |   |
|--------------|---|
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC   | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# PWR Power Module Series

Hot-swappable power modules for the PT-G7728/G7828 Series and MDS-G4012/20/28 Series



## Features and Benefits

- -40 to 85°C wide operating temperature
- IEC 61850-3 and IEEE 1613 compliant

## Certifications



## Introduction

The PWR Power Module Series hot-swappable power modules are designed for the PT-G7728/G7828 Series and MDS-G4012/20/28 Series. The power modules allow the switches to use 24/48 VDC or 110/220 VAC/VDC.

## Specifications

### Power Parameters

|                   |   |
|-------------------|---|
| Input Voltage     | <p><b>PWR-HV-P48:</b><br/>110/220 VDC/VAC for the switch system<br/>48 VDC for PoE systems<br/>(53 to 57 VDC is recommended for PoE+ devices)</p> <p><b>PWR-LV-P48:</b><br/>24/48 VDC for the switch system<br/>48 VDC for PoE systems<br/>(53 to 57 VDC is recommended for PoE+ devices)</p> <p><b>PWR-HV-NP:</b><br/>110/220 VDC/VAC for the switch system</p> <p><b>PWR-LV-NP:</b><br/>24/48 VDC for the switch system</p> |
| Operating Voltage | <p><b>PWR-HV-P48:</b><br/>88 to 300 VDC, 90 to 264 VAC for the switch system<br/>46 to 57 VDC for PoE system</p> <p><b>PWR-LV-P48:</b><br/>18 to 72 VDC for the switch system<br/>46 to 57 VDC for PoE systems</p> <p><b>PWR-HV-NP:</b><br/>88 to 300 VDC, 90 to 264 VAC for the switch system</p> <p><b>PWR-LV-NP:</b><br/>18 to 72 VDC for the switch system</p>  |



|                             |  |
|-----------------------------|--|
| Reverse Polarity Protection | Supported  |
| Alarm Contact Channels      | 1 relay output with current carrying capacity of 2 A @ 30 VDC or 0.5 A @ 125 VAC |

#### Physical Characteristics

|        |  |
|--------|--|
| Weight | PWR-HV-P48: 360 g (0.79 lb)<br>PWR-LV-P48: 360 g (0.79 lb)<br>PWR-HV-NP: 340 g (0.75 lb)<br>PWR-LV-NP: 340 g (0.75 lb) |
|--------|--|

#### MTBF

|           |  |
|-----------|--|
| Time      | PWR-HV-P48: 1,401,713 hrs<br>PWR-LV-P48: 1,372,587 hrs<br>PWR-HV-NP: 2,556,214 hrs<br>PWR-LV-NP: 2,710,293 hrs |
| Standards | Telcordia (Bellcore), GB   |

#### Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Ordering Information

| Model Name | Input Voltage                             | Operating Voltage                                      |
|------------|---|--|
| PWR-HV-P48 | 110/220 VDC/VAC<br>48 VDC for PoE systems | 88-300 VDC, 90-264 VAC<br>46 to 57 VDC for PoE systems |
| PWR-HV-NP  | 110/220 VDC/VAC                           | 88-300 VDC, 90-264 VAC                                 |
| PWR-LV-P48 | 24/48 VDC<br>48 VDC for PoE systems       | 18-72 VDC<br>46 to 57 VDC for PoE systems              |
| PWR-LV-NP  | 24/48 VDC                                 | 18-72 VDC  |

© Moxa Inc. All rights reserved. Updated Jun 30, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# RKS-G4028 Series

28G-port (with 802.3bt PoE option) full Gigabit modular managed Ethernet switches



## Features and Benefits

- Meets a wide range of demands from Fast Ethernet to full Gigabit industrial networks (up to 28 Gigabit ports)
- Modular interfaces for flexible connector type combinations
- Support for IEEE 802.3bt PoE for up to 90 W output per port
- High EMC immunity compliant with IEC 61850-3 and IEEE 1613
- Hardware-based IEEE 1588 PTP for high-precision time synchronization
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)<sup>1</sup>, and STP/RSTP/MSTP for network redundancy
- -40 to 75°C operating temperature range
- Supports MXstudio for easy, visualized industrial network management
- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards

## Certifications



## Introduction

The RKS-G4028 Series is designed to meet the rigorous demands of mission-critical applications for industry and business, such as power substation automation systems (IEC 61850-3, IEEE 1613), railway applications (EN 50121-4), and factory automation systems. The RKS-G4028 Series' Gigabit and Fast Ethernet backbone, redundant ring, and 24 VDC, 48 VDC, or 110/220 VDC/VAC dual isolated redundant power supplies increase the reliability of your communications and save on wiring costs.

The modular design of the RKS-G4028 Series also makes network planning easy, and allows greater flexibility by letting you install up to 28 Gigabit ports with various connector types.

## Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks (L3 models only)
- IEEE 1588v2 PTP (Precision Time Protocol) for network time synchronization
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Line-swap fast recovery
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management prevents unpredictable network status with "Lock port" to restrict access to authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Automatic recovery of connected device's IP addresses
- Configurable by web browser, Telnet/serial console, CLI, Windows utility, and ABC-02-USB automatic backup configurator

## Specifications

### Input/Output Interface

Alarm Contact Channels

1 relay output with current carrying capacity of 2 A @ 24 VDC

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

## Ethernet Interface

|  |  |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | RKS-G4028-4GT models: 4<br>RKS-G4028-L3-4GT models: 4  |
| 100/1000BaseSFP Slots                      | RKS-G4028-4GS models: 4<br>RKS-G4028-L3-4GS models: 4<br>RKS-G4028-PoE-4GS models: 4<br>RKS-G4028-L3-PoE-4GS models: 4   |
| Module                                     | <p>There are 3 module slots on the switch. Users can select different types of modules to insert into the switch. The modules that can be selected include 8-port/6-port modules with 10/100/1000BaseT(X), 10/100BaseT(X), 100/1000BaseSFP, or 100BaseFX (SC/ST connector) interfaces.</p> <p>Refer to Expansion Modules in the Accessories section for a full list of supported interface modules.</p>  |
| Standards                                  | <p>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>           IEEE 802.1p for Class of Service<br/>           IEEE 802.1Q for VLAN Tagging<br/>           IEEE 802.1s for Multiple Spanning Tree Protocol<br/>           IEEE 802.1w for Rapid Spanning Tree Protocol<br/>           IEEE 802.1X for authentication<br/>           IEEE 802.3 for 10BaseT<br/>           IEEE 802.3ab for 1000BaseT(X)<br/>           IEEE 802.3ad for Port Trunk with LACP<br/>           IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>           IEEE 802.3x for flow control<br/>           IEEE 802.3z for 1000BaseSX/LX/LHX/ZX<br/>           IEEE 802.3bt for Power over Ethernet</p> |

## Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter               | GMRP, GVRP, GARP, 802.1Q, IGMP Snooping v1/v2/v3, IGMP Querier   |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP   |
| Routing Redundancy   | L3 models: VRRP  |
| Security             | Broadcast storm protection, Rate Limit, Access control list, Static port lock, Sticky MAC, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and password policy, Secure boot, MAC authentication bypass, Trust access control          |
| Time Management      | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication  |
| Protocols            | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog  |
| Unicast Routing      | L3 models: OSPF, Static Route  |
| MIB                  | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9   |
| Power Substation     | MMS  |

## Switch Properties

|                   |        |
|-------------------|--------|
| IGMP Groups       | 2048   |
| Jumbo Frame Size  | 9.6 KB |
| MAC Table Size    | 16 K   |
| Max. No. of VLANs | 256    |

|                                 |  |
|---------------------------------|--|
| Packet Buffer Size              | 1.5 Mbits  |
| Priority Queues                 | 8  |
| VLAN ID Range                   | VID 1 to 4094  |
| <b>USB Interface</b>            |  |
| Storage Port                    | USB Type A   |
| <b>MicroSD Interface</b>        |  |
| Storage Port                    | MicroSD card   |
| <b>Serial Interface</b>         |  |
| Console Port                    | RS-232 (RJ45)  |
| <b>Power Parameters</b>         |  |
| Total PoE Power Budget          | PoE models: 300 W  |
| Max. PoE Power Output per Port  | PoE models:<br>IEEE 802.3af: 15.4 W<br>IEEE 802.3at: 30 W<br>IEEE 802.3bt: 90 W  |
| Input Voltage                   | RKS-G4028-LV models: 24/48 VDC<br>RKS-G4028-2LV models: 24/48 VDC (redundant dual inputs)<br>RKS-G4028-HV models: 110/220 VAC, 110/220 VDC<br>RKS-G4028-2HV models: 110/220 VAC, 110/220 VDC (redundant dual inputs)<br>PoE models: 48 VDC (for the PoE system)    |
| Operating Voltage               | RKS-G4028-LV/2LV models: 18 to 72 VDC<br>RKS-G4028-HV/2HV models: 88 to 300 VDC, 85 to 264 VAC<br>PoE models: 46 to 57 VDC (for the PoE system)  |
| Overload Current Protection     | Supported  |
| Reverse Polarity Protection     | Supported  |
| Input Current                   | RKS-G4028-LV/2LV models:<br>Max. 2.53 A @ 24 VDC<br>Max. 1.25 A @ 48 VDC<br><br>RKS-G4028-HV/2HV models:<br>Max. 0.55 A @ 110 VDC<br>Max. 0.29 A @ 220 VDC<br>Max. 1.01 A @ 110 VAC<br>Max. 0.62 A @ 220 VAC<br><br>EPS (PoE models only):<br>Max. 7.50 A @ 48 VDC |
| <b>Physical Characteristics</b> |  |
| IP Rating                       | IP30   |
| Dimensions                      | 440 x 44 x 300 mm (17.32 x 1.37 x 11.81 in)  |
| Weight                          | RKS-G4028-LV/HV models: 4900 g (10.80 lb)<br>RKS-G4028-2LV/2HV models: 5200 g (11.46 lb)<br>RKS-G4028-PoE-LV/HV models: 5000 g (11.02 lb)<br>RKS-G4028-PoE-2LV/2HV models: 5300 g (11.68 lb)   |
| Installation                    | Rack mounting  |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|                  |  |
|------------------|--|
| Safety           | EN 62368-1, UL 62368-1, UL 61010   |
| EMC              | EN 55032/35  |
| EMI              | CISPR 32, FCC Part 15B Class A   |
| EMS              | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 35 V/m<br>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 DIPs |
| Power Substation | IEC 61850-3, IEEE 1613   |
| Railway          | EN 50121-4   |
| Freefall         | IEC 60068-2-32   |
| Shock            | IEC 60068-2-27   |
| Vibration        | IEC 60068-2-6  |

## MTBF

|           |  |
|-----------|--|
| Time      | RKS-G4028-4GT-HV models: 572,888 hours<br>RKS-G4028-4GT-2HV models: 518,894 hours<br>RKS-G4028-4GS-HV models: 529,925 hours<br>RKS-G4028-4GS-2HV models: 483,436 hours<br>RKS-G4028-4GT-LV models: 548,589 hours<br>RKS-G4028-4GT-2LV models: 479,574 hours<br>RKS-G4028-4GS-LV models: 508,639 hours<br>RKS-G4028-4GS-2LV models: 449,160 hours<br>RKS-G4028-PoE-4GS-HV models: 508,190 hours<br>RKS-G4028-PoE-4GS-2HV models: 465,282 hours<br>RKS-G4028-PoE-4GS-LV models: 488,598 hours<br>RKS-G4028-PoE-4GS-2LV models: 433,472 hours |
| Standards | Telcordia (Bellcore), GB   |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x RKS-G4028 Series switch  |
| Installation Kit | 2 x rack-mounting ear<br>4 x protective caps for unused SFP ports (for RKS-G4028-GS models only)<br>8 x round stickers for module screws |

|               |  |
|---------------|--|
| Documentation | 1 x quick installation guide<br>1 x warranty card  |
| Note          | <ol style="list-style-type: none"> <li>1. Only the RKS-G4028-PoE Series and RKS-G4028-L3-PoE models support PoE functionality with RM-G4000-8GPoE and/or RM-G4000-8PoE modules.</li> <li>2. Power over Ethernet requires the 48 VDC external power supply (46 to 57 VDC).</li> <li>3. The 48 VDC external power supply, SFP modules, and modules from the RM-G4000 Module Series need to be purchased separately for use with this product.</li> </ol> |

## Dimensions

Unit: mm (inch)

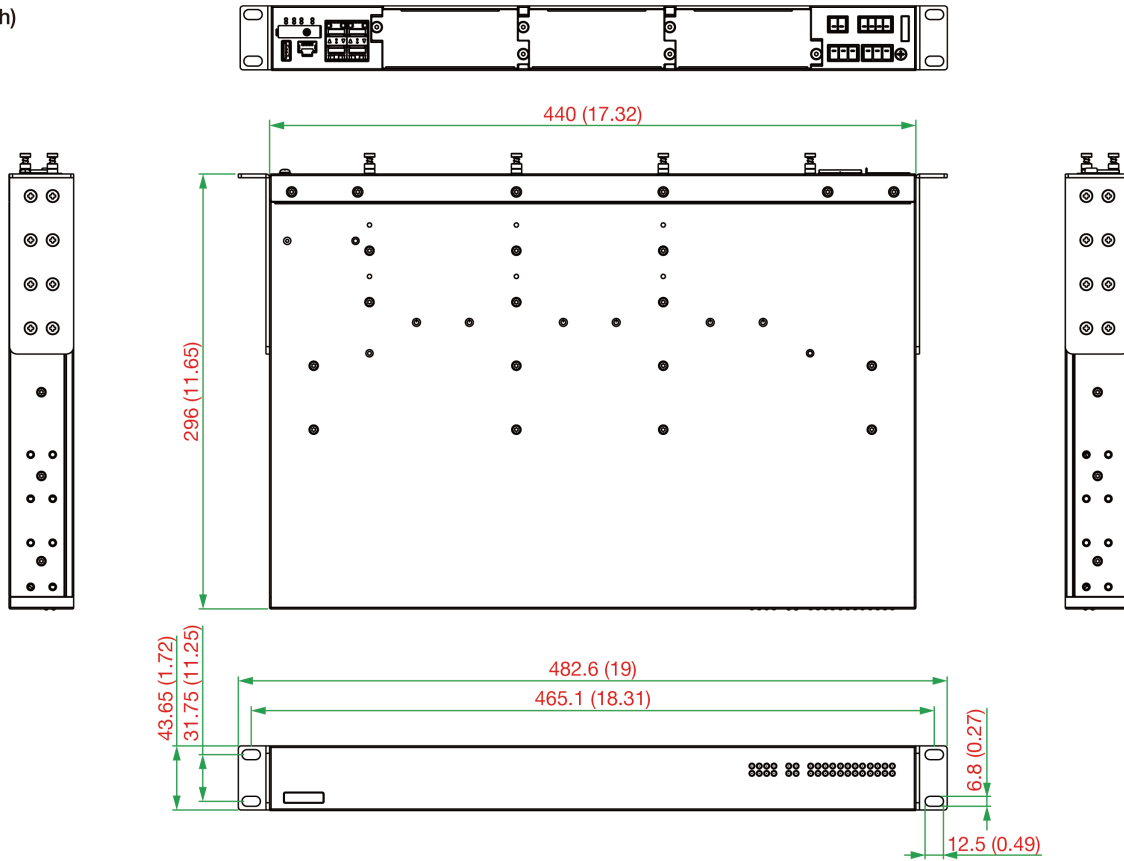

## Ordering Information

| Model Name            | Max. No. of Ports | PoE Support | L3 Functionality | Input Voltage       | Redundant Dual Input | External Power Supply | Operating Temp. |
|-----------------------|-------------------|-------------|------------------|---------------------|----------------------|-----------------------|-----------------|
| RKS-G4028-4GT-HVT     | 28                | -           | -                | 110/220 VAC/<br>VDC | -                    | -                     | -40 to 75°C     |
| RKS-G4028-4GT-2HV-T   | 28                | -           | -                | 110/220 VAC/<br>VDC | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-4GS-HV-T    | 28                | -           | -                | 110/220 VAC/<br>VDC | -                    | -                     | -40 to 75°C     |
| RKS-G4028-4GS-2HV-T   | 28                | -           | -                | 110/220 VAC/<br>VDC | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-4GT-LV-T    | 28                | -           | -                | 24/48 VDC           | -                    | -                     | -40 to 75°C     |
| RKS-G4028-4GT-2LV-T   | 28                | -           | -                | 24/48 VDC           | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-4GS-LVT     | 28                | -           | -                | 24/48 VDC           | -                    | -                     | -40 to 75°C     |
| RKS-G4028-4GS-2LV-T   | 28                | -           | -                | 24/48 VDC           | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GT-HV-T | 28                | -           | ✓                | 110/220 VAC/<br>VDC | -                    | -                     | -40 to 75°C     |

| Model Name                 | Max. No. of Ports | PoE Support | L3 Functionality | Input Voltage       | Redundant Dual Input | External Power Supply | Operating Temp. |
|----------------------------|-------------------|-------------|------------------|---------------------|----------------------|-----------------------|-----------------|
| RKS-G4028-L3-4GT-2HV-T     | 28                | -           | ✓                | 110/220 VAC/<br>VDC | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GS-HV-T      | 28                | -           | ✓                | 110/220 VAC/<br>VDC | -                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GS-2HV-T     | 28                | -           | ✓                | 110/220 VAC/<br>VDC | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GT-LV-T      | 28                | -           | ✓                | 24/48 VDC           | -                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GT-2LV-T     | 28                | -           | ✓                | 24/48 VDC           | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GS-LV-T      | 28                | -           | ✓                | 24/48 VDC           | -                    | -                     | -40 to 75°C     |
| RKS-G4028-L3-4GS-2LV-T     | 28                | -           | ✓                | 24/48 VDC           | ✓                    | -                     | -40 to 75°C     |
| RKS-G4028-PoE-4GS-HV-T     | 28                | ✓           | -                | 110/220 VAC/<br>VDC | -                    | ✓                     | -40 to 75°C     |
| RKS-G4028-PoE-4GS-2HV-T    | 28                | ✓           | -                | 110/220 VAC/<br>VDC | ✓                    | ✓                     | -40 to 75°C     |
| RKS-G4028-PoE-4GS-LV-T     | 28                | ✓           | -                | 24/48 VDC           | -                    | ✓                     | -40 to 75°C     |
| RKS-G4028-PoE-4GS-2LV-T    | 28                | ✓           | -                | 24/48 VDC           | ✓                    | ✓                     | -40 to 75°C     |
| RKS-G4028-L3-PoE-4GS-HV-T  | 28                | ✓           | ✓                | 110/220 VAC/<br>VDC | -                    | ✓                     | -40 to 75°C     |
| RKS-G4028-L3-PoE-4GS-2HV-T | 28                | ✓           | ✓                | 110/220 VAC/<br>VDC | ✓                    | ✓                     | -40 to 75°C     |
| RKS-G4028-L3-PoE-4GS-LV-T  | 28                | ✓           | ✓                | 24/48 VDC           | -                    | ✓                     | -40 to 75°C     |
| RKS-G4028-L3-PoE-4GS-2LV-T | 28                | ✓           | ✓                | 24/48 VDC           | ✓                    | ✓                     | -40 to 75°C     |

## Accessories (sold separately)

### Expansion Modules

|                  |  |
|------------------|--|
| RM-G4000-8TX     | Fast Ethernet module with 8 10/100BaseT(X) ports   |
| RM-G4000-8SFP    | Fast Ethernet module with 8 100BaseSFP slots   |
| RM-G4000-8PoE    | Fast Ethernet module with 8 10/100BaseT(X) IEEE 802.3bt PoE ports                                  |
| RM-G4000-8GTX    | Gigabit Ethernet module with 8 10/100/1000BaseT(X) ports   |
| RM-G4000-8GSFP   | Gigabit Ethernet module with 8 100/1000BaseSFP slots   |
| RM-G4000-8GPoE   | Gigabit Ethernet module with 8 10/100/1000BaseT(X) IEEE 802.3bt PoE ports                          |
| RM-G4000-6MSC    | Fast Ethernet module with 6 multi-mode 100BaseFX ports with SC connectors                          |
| RM-G4000-6MST    | Fast Ethernet module with 6 multi-mode 100BaseFX ports with ST connectors                          |
| RM-G4000-6SSC    | Fast Ethernet module with 6 single-mode 100BaseFX ports with SC connectors                         |
| RM-G4000-4MSC2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with SC connectors, 2 10/100BaseT(X) ports  |
| RM-G4000-4MST2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with ST connectors, 2 10/100BaseT(X) ports  |
| RM-G4000-4SSC2TX | Fast Ethernet module with 4 single-mode 100BaseFX ports with SC connectors, 2 10/100BaseT(X) ports |
| RM-G4000-2MSC4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with SC connectors, 4 10/100BaseT(X) ports  |
| RM-G4000-2MST4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with ST connectors, 4 10/100BaseT(X) ports  |

|                  |  |
|------------------|--|
| RM-G4000-2SSC4TX | Fast Ethernet module with 2 single-mode 100BaseFX ports with SC connectors, 4 10/100BaseT(X) ports |
|------------------|--|

### Storage Kits

|                  |  |
|------------------|--|
| ABC-02-USB       | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature                        |
| ABC-02-USB-T     | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature                      |
| ABC-03-microSD-T | MicroSD-based configuration backup and restoration tool, firmware upgrades, and log file storage tool for managed Ethernet switches and WLAN products, -40 to 85°C operating temperature |

### SFP Modules

|                |  |
|----------------|--|
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature   |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC      | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature   |
| SFP-1GSXC      | SFP module with 1 1000BaseSXC port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature                                       |



|                |   |
|----------------|---|
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC-T  | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

#### Software

|                   |                                       |
|-------------------|---------------------------------------|
| MXview-100        | MXview license for 100 nodes          |
| MXview-50         | MXview license for 50 nodes           |
| MXview-250        | MXview license for 250 nodes          |
| MXview-500        | MXview license for 500 nodes          |
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 15, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# RM-G4000 Module Series

Fast Ethernet and Gigabit modules for RKS-G4028 Series rackmount Ethernet switches

## Features and Benefits

- -40 to 75°C operating temperature range
- IEC 61850-3 and IEEE 1613 compliant



## Certifications



## Introduction

The RM-G4000 Module Series includes Gigabit and Fast Ethernet modules for the RKS-G4000 Series rack-mount Ethernet switches. Each RM-G4000 Series module supports up to 8 ports with a variety of interface types including TX, MSC, SSC, and MST media types. Additionally, the RM-G4000-8GPoE and RM-G4000-8PoE modules provide the RKS-G4000 Series PoE models with high-capacity PoE functionality. IEEE 1588 interface modules provide hardware-based PTP functions for precise time synchronization across the network.

## Specifications

### Ethernet Interface

|   |   |
|---|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector)      | RM-G4000-8GTX: 8  |
| 10/100BaseT(X) Ports (RJ45 connector)           | RM-G4000-8TX: 8<br>RM-G4000-4MSC2TX: 2<br>RM-G4000-2MSC4TX: 4<br>RM-G4000-4MST2TX: 2<br>RM-G4000-2MST4TX: 4<br>RM-G4000-4SSC2TX: 2<br>RM-G4000-2SSC4TX: 4 |
| 100/1000BaseSFP Slots                           | RM-G4000-8GSFP: 8   |
| 100BaseSFP Slots                                | RM-G4000-8SFP: 8  |
| 100BaseFX Ports (multi-mode SC connector)       | RM-G4000-6MSC: 6<br>RM-G4000-4MSC2TX: 4<br>RM-G4000-2MSC4TX: 2  |
| 100BaseFX Ports (multi-mode ST connector)       | RM-G4000-6MST: 6<br>RM-G4000-4MST2TX: 4<br>RM-G4000-2MST4TX: 2  |
| 100BaseFX Ports (single-mode ST connector)      | RM-G4000-6SSC: 6<br>RM-G4000-4SSC2TX: 4<br>RM-G4000-2SSC4TX: 2  |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector) | RM-G4000-8GPoE: 8   |

|  |   |                         |              |             |              |
|--|---|-------------------------|--------------|-------------|--------------|
| PoE Ports (10/100BaseT(X), RJ45 connector) | RM-G4000-8PoE: 8  |                         |              |             |              |
| Optical Fiber                              |   |                         | 100BaseFX    |             |              |
|  |   |                         | Multi-Mode   | Single-Mode |              |
|  | Fiber Cable Type  | OM1                     | 50/125 μm    | G.652       |              |
|  |   |                         | 800 MHz x km |             |              |
|  | Typical Distance  |                         | 4 km         | 5 km        | 40 km        |
|  | Wavelength  | Typical (nm)            | 1300         |             | 1310         |
|  |   | TX Range (nm)           | 1260 to 1360 |             | 1280 to 1340 |
|  |   | RX Range (nm)           | 1100 to 1600 |             | 1100 to 1600 |
|  | Optical Power   | TX Range (dBm)          | -10 to -20   |             | 0 to -5      |
|  |   | RX Range (dBm)          | -3 to -32    |             | -3 to -34    |
|  |   | Link Budget (dB)        | 12           |             | 29           |
|  |   | Dispersion Penalty (dB) | 3            |             | 1            |
|  | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                         |              |             |              |

### Physical Characteristics

|        |   |
|--------|---|
| Weight | RM-G4000-2SSC4TX: 400 g (0.88 lb)<br>RM-G4000-6MST: 400 g (0.88 lb)<br>RM-G4000-8TX: 300 g (0.66 lb)<br>RM-G4000-8SFP: 400 g (0.88 lb)<br>RM-G4000-8GTX: 300 g (0.66 lb)<br>RM-G4000-2MSC4TX: 400 g (0.88 lb)<br>RM-G4000-4SSC2TX: 400 g (0.88 lb)<br>RM-G4000-4MST2TX: 400 g (0.88 lb)<br>RM-G4000-2MST4TX: 400 g (0.88 lb)<br>RM-G4000-4MSC2TX: 400 g (0.88 lb)<br>RM-G4000-8GSFP: 400 g (0.88 lb)<br>RM-G4000-6MSC: 400 g (0.88 lb)<br>RM-G4000-6SSC: 400 g (0.88 lb)<br>RM-G4000-8PoE: 500 g (1.10 lb)<br>RM-G4000-8GPoE: 500 g (1.10 lb) |
|--------|---|

### MTBF

|           |   |
|-----------|---|
| Time      | RM-G4000-8TX: 12,132,675 hrs<br>RM-G4000-8SFP: 3,005,803 hrs<br>RM-G4000-8GTX: 12,132,675 hrs<br>RM-G4000-8GSFP: 3,005,803 hrs<br>RM-G4000-6MSC: 2,183,161 hrs<br>RM-G4000-6MST: 2,183,161 hrs<br>RM-G4000-6SSC: 2,183,161 hrs<br>RM-G4000-4MSC2TX: 2,469,891 hrs<br>RM-G4000-4MST2TX: 2,469,891 hrs<br>RM-G4000-4SSC2TX: 2,469,891 hrs<br>RM-G4000-2MSC4TX: 2,891,502 hrs<br>RM-G4000-2MST4TX: 2,891,502 hrs<br>RM-G4000-2SSC4TX: 2,891,502 hrs<br>RM-G4000-8PoE: 2,063,404 hrs<br>RM-G4000-8GPoE: 2,063,404 hrs |
| Standards | Telcordia (Bellcore), GB  |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|               |                            |
|---------------|----------------------------|
| Device        | 1 x RM-G4000 Series module |
| Documentation | 1 x warranty card          |

## Ordering Information

| Model Name       | 10/100/<br>1000BaseT(X)<br>Ports | 10/100BaseT(X)<br>Ports    | 100/<br>1000BaseSFP<br>Ports | 100BaseSFP<br>Ports | 100BaseFX<br>Ports Multi-<br>mode, SC<br>Connector | 100BaseFX Port<br>Multi-mode, ST<br>Connector | 100BaseFX Port<br>Single-mode,<br>SC Connector |
|------------------|----------------------------------|----------------------------|------------------------------|---------------------|--|---|--|
| RM-G4000-8GTX    | 8                                | -                          | -                            | -                   | -  | -   | -  |
| RM-G4000-8TX     | -                                | 8                          | -                            | -                   | -  | -   | -  |
| RM-G4000-8GSFP   | -                                | -                          | 8                            | -                   | -  | -   | -  |
| RM-G4000-8SFP    | -                                | -                          | -                            | 8                   | -  | -   | -  |
| RM-G4000-6MSC    | -                                | -                          | -                            | -                   | 6  | -   | -  |
| RM-G4000-6MST    | -                                | -                          | -                            | -                   | -  | 6   | -  |
| RM-G4000-6SSC    | -                                | -                          | -                            | -                   | -  | -   | 6  |
| RM-G4000-4MSC2TX | -                                | 2                          | -                            | -                   | 4  | -   | -  |
| RM-G4000-4MST2TX | -                                | 2                          | -                            | -                   | -  | 4   | -  |
| RM-G4000-4SSC2TX | -                                | 2                          | -                            | -                   | -  | -   | 4  |
| RM-G4000-2MSC4TX | -                                | 4                          | -                            | -                   | 2  | -   | -  |
| RM-G4000-2MST4TX | -                                | 4                          | -                            | -                   | -  | 2   | -  |
| RM-G4000-2SSC4TX | -                                | 4                          | -                            | -                   | -  | -   | 2  |
| RM-G4000-8GPoE   | 8<br>(IEEE 802.3bt<br>PoE)       | -                          | -                            | -                   | -  | -   | -  |
| RM-G4000-8PoE    | -                                | 8<br>(IEEE 802.3bt<br>PoE) | -                            | -                   | -  | -   | -  |

## Accessories (sold separately)

### SFP Modules

|               |  |
|---------------|--|
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |

|                |  |
|----------------|--|
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature  |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature  |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature   |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature   |
| SFP-1GLSXC     | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature   |
| SFP-1GLSXC-T   | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature   |
| SFP-1GLXC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature  |
| SFP-1GLXC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature  |
| SFP-1GSXC      | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature  |
| SFP-1GSXC-T    | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature                                      |
| SFP-1GZXC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature  |
| SFP-1GZXC-T    | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |

© Moxa Inc. All rights reserved. Updated June 09, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# TN-5500A Series

EN 50155 8 to 18-port Ethernet switches with up to 8 PoE ports and up to 2 Gigabit ports



## Features and Benefits

- Up to 2 Gigabit ports with optional bypass relay function
- 8 IEEE 802.3at/af compliant PoE and Ethernet combo ports
- Isolated power with 24 to 110 VDC power supply range
- Complies with all EN 50155 mandatory test items<sup>1</sup>
- -40 to 75°C operating temperature range
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy

## Certifications



## Introduction

The ToughNet TN-5500A Series M12 managed Ethernet switches are designed for railway applications, such as rolling stock, and wayside installations. The TN-5500A Series switches use M12 and other circular connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. The TN-5500A Series Ethernet switches provide 8 or 16 Fast Ethernet M12 ports with or without 8 IEEE 802.3at/af compliant PoE (Power-over-Ethernet) ports, and 2 ports on the down side to provide the Gigabit Ethernet interface with an optional bypass relay function. The PoE switches are classified as power source equipment (PSE) and provide up to 30 watts of power per port, and can be used to power IEEE 802.3at/af compliant powered devices (PDs), such as IP surveillance, wireless access points, and IP phones.

The TN-5500A Series provides a wide power input range of 24/36/48/72/96/110 VDC that allows you to use the same type of power source at different sites around the globe. In addition, the 24 to 110 VDC wide power input range and isolated power increases the reliability of your communications system. In addition, the -40 to 75°C operating temperature and IP54 rated waterproof enclosure allow deployment in harsh environments. TN-5500A Series Ethernet switches are compliant with mandatory sections of EN 50155, covering operating temperature, power input voltage, surge, ESD, and vibration, as well as conformal coating and power insulation, making the switches suitable for a variety of industrial applications.

## Additional Features and Benefits

- Provides up to 30 watts per PoE port with a total power budget of 120 watts per switch
- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- Leading EN 50155 PoE switches for rolling stock applications
- DHCP Option 82 for IP address assignment with different policies
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- EtherNet/IP and Modbus TCP industrial Ethernet protocols supported
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and ToS/DiffServ) allows real-time traffic classification and prioritization
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port allows access by only authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Line-swap fast recovery
- LLDP for automatic topology discovery in network management software
- Configurable by web browser, Telnet/serial console, CLI, and Windows utility
- Loop protection to prevent network loops
- Panel mounting or DIN-rail mounting installation capability

## Specifications

### Input/Output Interface

Alarm Contact Channels

2 x relay output in one M12 A-coded 5-pin male connector with current carrying capacity of 1 A @ 30 VDC

1. This product is suitable for rolling stock railway applications, as defined by the EN 50155 standard. For a more detailed statement, click here: [www.moxa.com/doc/specs/EN\\_50155\\_Compliance.pdf](http://www.moxa.com/doc/specs/EN_50155_Compliance.pdf)

## Ethernet Interface

|  |  |
|--|--|
| 10/100/1000BaseT(X) Ports, Q-ODC Fiber Connector                                 | TN-5510A-2GLSX Series: 2<br>TN-5510A-8PoE-2GLSX Series: 2  |
| 10/100/1000BaseT(X) Ports (M12 X-coded 8-pin female connector)                   | TN-5510A-2GTX Series: 2<br>TN-5510A-8PoE-2GTX Series: 2<br>TN-5518A-2GTX Series: 2<br>TN-5518A-8PoE-2GTX Series: 2   |
| 10/100/1000BaseT(X) Ports (M12 X-coded 8-pin female connector with bypass relay) | TN-5510A-2GTXBP Series: 2<br>TN-5510A-8PoE-2GTXBP Series: 2  |
| 10/100BaseT(X) Ports (M12 D-coded 4-pin female connector)                        | TN-5508A/5510A Series non-PoE models: 8<br>TN-5516A/5518A Series non-PoE models: 16<br>TN-5516A/5518A Series PoE models: 8   |
| PoE Ports (10/100BaseT(X), M12 D-coded 4-pin female connector)                   | TN-5500A Series PoE models: 8  |
| Standards  | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br>IEEE 802.3x for flow control<br>TN-5500A Series PoE models: IEEE 802.3af/at for PoE/PoE+ output<br>TN-5510A Series 2GLSX models: IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

## Ethernet Software Features

|                       |   |
|-----------------------|---|
| Broadcast Forwarding  | IP directed broadcast, broadcast forwarding   |
| Configuration Options | Command Line Interface (CLI), Command Line Interface (CLI) through Serial/Telnet/SSH, Web Console (HTTP/HTTPS), Windows Utility   |
| Filter                | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, Port-based VLAN, Static Multicast  |
| Industrial Protocols  | EtherNet/IP Adapter (Slave), Modbus TCP Server (Slave)  |
| Management            | Back Pressure Flow Control, DHCP Option 66/67/82, DHCP Server/Client, Flow control, HTTP, IPv4/IPv6, IOxpress, LLDP, Port Mirror, QoS/CoS/ToS, RARP, RMON, SMTP, SNMP Inform, SNMP Trap, Syslog, Telnet, Account Management |
| MIB                   | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols  | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2, Turbo Ring with DRC   |
| Security              | Broadcast storm protection, HTTPS/SSL, Local Account Accessibility, TACACS+, Port Lock, RADIUS, Rate Limit, SSH   |
| Time Management       | IEEE 1588 PTP v1/v2, NTP Server/Client, SNTP  |

## Switch Properties

|                   |               |
|-------------------|---------------|
| IGMP Groups       | 256           |
| Max. No. of VLANs | 64            |
| VLAN ID Range     | VID 1 to 4094 |

## LED Interface

|                |  |
|----------------|--|
| LED Indicators | STATE, PWR1, PWR2, FAULT, 10/100/1000M |
|----------------|--|

## Serial Interface

|              |                            |
|--------------|----------------------------|
| Console Port | M12 A-coded male connector |
|--------------|----------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Input Current               | TN-5508A-WV Series: 0.28 A @ 24 VDC, 0.07 A @ 110 VDC<br>TN-5508A-8PoE Series: 7.6 A @ 24 VDC, 1.55 A @ 110 VDC<br>TN-5510A-2GTXBP Series: 0.56 A @ 24 VDC, 0.13 A @ 110 VDC<br>TN-5510A-2GLSX Series: 0.45 A @ 24 VDC, 0.1 A @ 110 VDC<br>TN-5510A-8PoE-2GTX Series: 7.90 A @ 24 VDC, 1.61 A @ 110 VDC<br>TN-5510A-8PoE-2GLSX Series: 7.80 A @ 24 VDC, 1.58 A @ 110 VDC<br>TN-5516A-WV Series: 0.39 A @ 24 VDC, 0.09 A @ 110 VDC<br>TN-5516A-8PoE Series: 8.37 A @ 24 VDC, 1.65 A @ 110 VDC<br>TN-5518A-2GTX Series: 0.68 A @ 24 VDC, 0.16 A @ 110 VDC<br>TN-5518A-8PoE-2GTX Series: 8.66 A @ 24 VDC, 1.69 A @ 110 VDC |
| Input Voltage               | 24/36/48/72/96/110 VDC, Redundant dual inputs   |
| No. of Power Inputs         | TN-5500A Series non-PoE models: 2<br>TN-5500A Series PoE models: 1  |
| Operating Voltage           | 16.8 to 137.5 VDC   |
| Overload Current Protection | Supported   |
| Power Connector             | M23 connector   |
| Reverse Polarity Protection | Supported   |
| Total PoE Power Budget      | TN-5500A Series PoE models: 120 W   |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP54   |
| Dimensions   | TN-5508A Series non-PoE models: 185 x 175.8 x 76 mm (7.28 x 6.92 x 2.99 in)<br>TN-5508A Series PoE models: 185 x 175.8 x 115 mm (7.28 x 6.92 x 4.53 in)<br>TN-5510A Series non-PoE models: 185 x 180.9 x 76 mm (7.28 x 7.12 x 2.99 in)<br>TN-5510A Series PoE models: 185 x 180.9 x 115 mm (7.28 x 7.12 x 4.53 in)<br>TN-5510A-2GLSX-ODC Series: 185 x 204.3 x 76.0 mm (7.28 x 8.04 x 2.99 in)<br>TN-5510A-8PoE-2GLSX-ODC series: 185 x 219.3 x 115 mm (7.28 x 8.63 x 4.53 in)<br>TN-5516A Series non-PoE models: 250 x 175.8 x 76 mm (9.84 x 6.92 x 2.99 in)<br>TN-5516A Series PoE models: 250 x 175.8 x 115 mm (9.84 x 6.92 x 4.53 in)<br>TN-5518A Series non-PoE models: 250 x 180.9 x 76 mm (9.84 x 7.12 x 2.99 in)<br>TN-5518A Series PoE models: 250 x 180.9 x 115 mm (9.84 x 7.12 x 4.53 in) |
| Weight       | TN-5508A Series non-PoE models: 1,610 g (3.54 lb)<br>TN-5508A Series PoE models: 2,383 g (5.25 lb)<br>TN-5510A Series non-PoE models: 1,805 g (3.97 lb)<br>TN-5510A Series PoE models: 2,690 g (5.93 lb)<br>TN-5516A Series non-PoE models: 2,138 g (4.71 lb)<br>TN-5516A Series PoE models: 3,286 g (7.24 lb)<br>TN-5518A Series non-PoE models: 2,250 g (4.96 lb)<br>TN-5518A Series PoE models: 3,439 g (7.58 lb)   |
| Installation | DIN-rail mounting (optional), Wall mounting  |
| Protection   | TN-5500A Series -CT models: PCB conformal coating  |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| Altitude                               | 2000 m                     |



## Standards and Certifications

|                         |  |
|-------------------------|--|
| EMC                     | EN 55032/24  |
| EMS                     | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Freefall                | IEC 60068-2-31   |
| Radio Frequency         | FCC  |
| Railway                 | EN 50121-4, EN 50155, IEC 60571  |
| Railway Fire Protection | EN 45545-2   |
| Safety                  | IEC 60950-1, UL 61010-2-201  |
| Shock                   | IEC 60068-2-27, IEC 61373, EN 50155  |
| Vibration               | IEC 60068-2-64, IEC 61373, EN 50155  |

## Declaration

|               |                   |
|---------------|-------------------|
| Green Product | RoHS, CRoHS, WEEE |
|---------------|-------------------|

## MTBF

|           |   |
|-----------|---|
| Time      | TN-5508A-WV Series: 814,964 hrs<br>TN-5508A-8PoE Series: 526,372 hrs<br>TN-5510A-2GTX Series: 758,855 hrs<br>TN-5510A-2GTXBP Series: 742,880 hrs<br>TN-5510A-2GLSX Series: 722,049 hrs<br>TN-5510A-8PoE-2GTX Series: 502,756 hrs<br>TN-5510A-8PoE-2GTXBP Series: 495,703 hrs<br>TN-5510A-8PoE-2GLSX Series: 486,560 hrs<br>TN-5516A-WV Series: 722,721 hrs<br>TN-5516A-8PoE Series: 722,721 hrs<br>TN-5516A-2GTX Series: 647,128 hrs<br>TN-5516A-2GTXBP Series: 628,808 hrs<br>TN-5516A-8PoE-2GTX Series: 448,300 hrs<br>TN-5516A-8PoE-2GTXBP Series: 439,442 hrs |
| Standards | Telcordia SR332   |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |


## Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x TN-5500A Series switch  |
| Installation Kit | 2 x cap, female, metal, for M12 port<br>1 x wall-mounting kit                     |
| Cable            | 1 x M12-to-DB9 console port   |
| Documentation    | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card |

# Dimensions


## TN-5508A non-PoE Series

Unit: mm (inch)

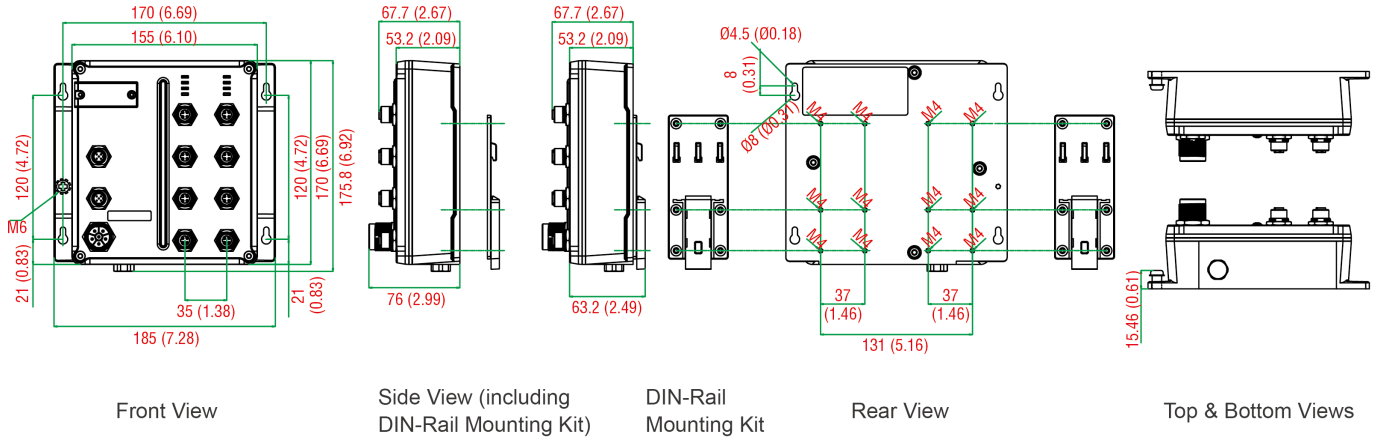


## TN-5508A-8PoE Series

Unit: mm (inch)

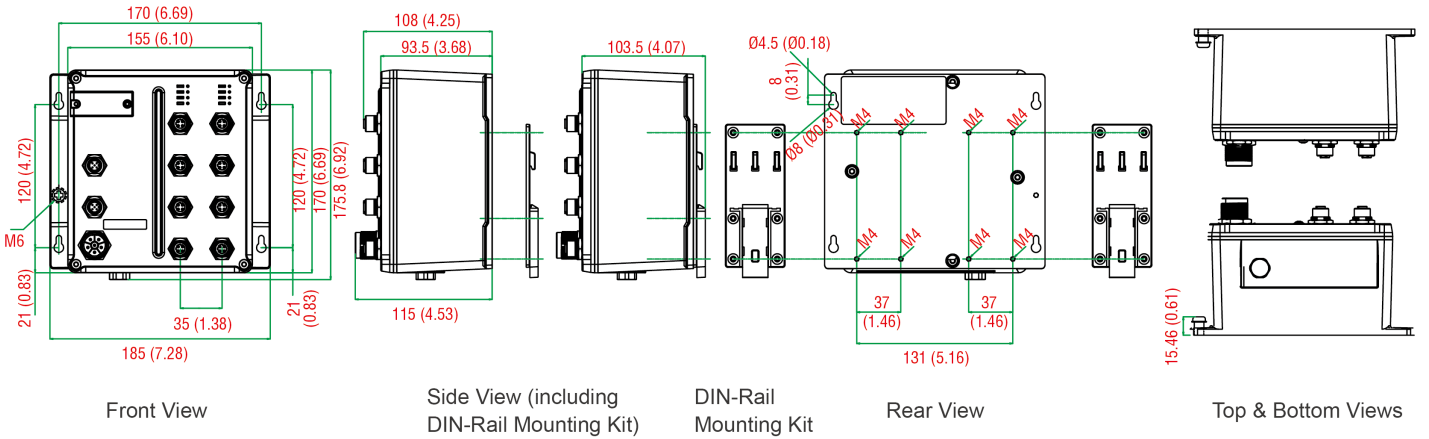

## TN-5510A non-PoE Series


Unit: mm (inch)

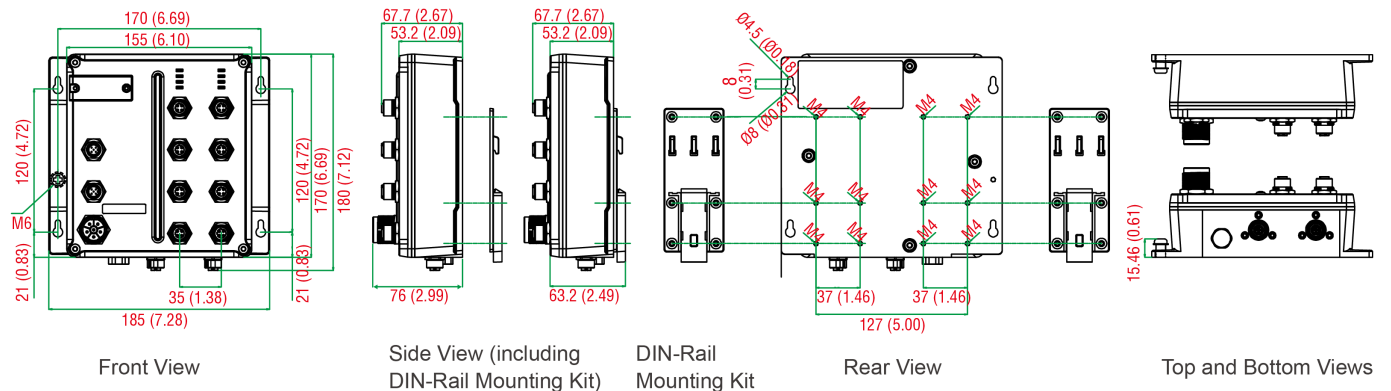




## TN-5516A non-PoE Series

Unit: mm (inch)

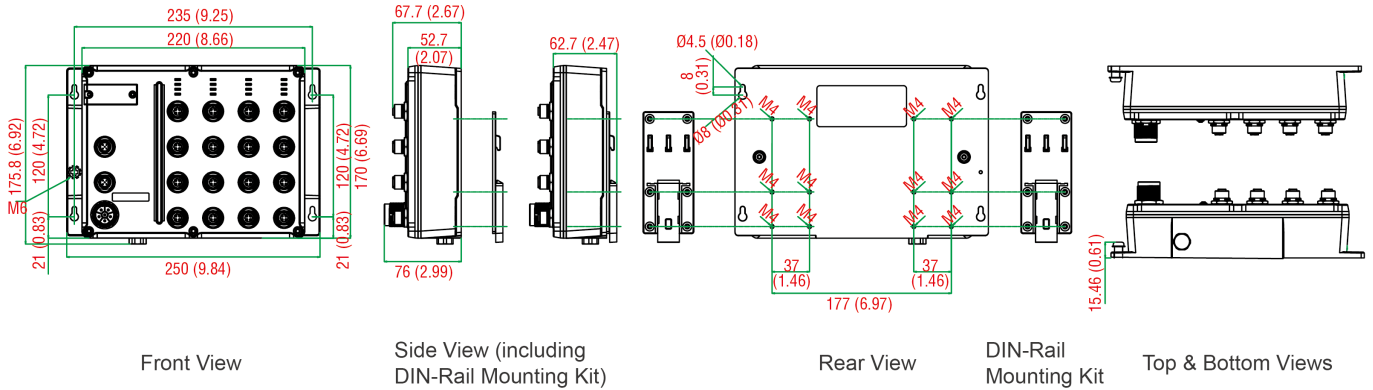


## TN-5516A-8PoE Series

Unit: mm (inch)

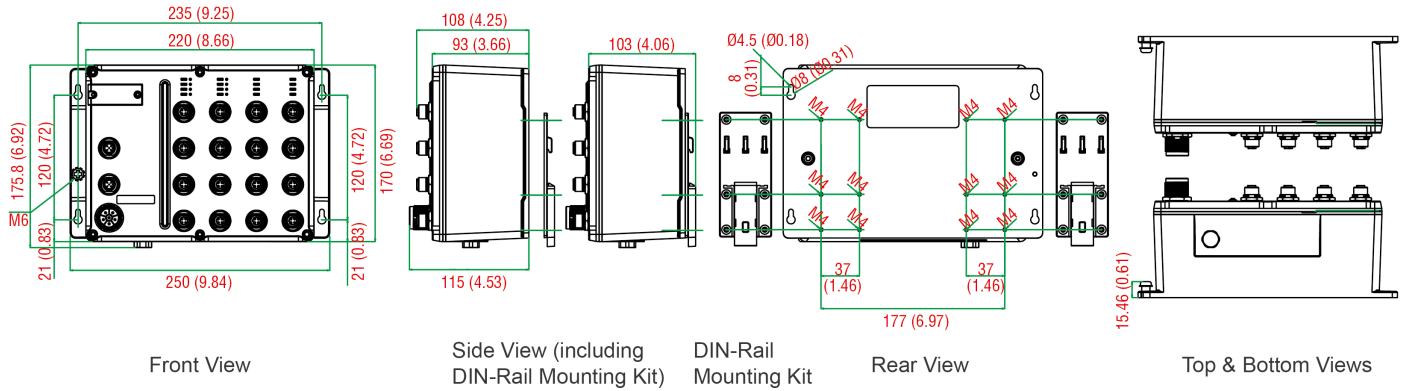

## TN-5518A non-PoE Series

Unit: mm (inch)

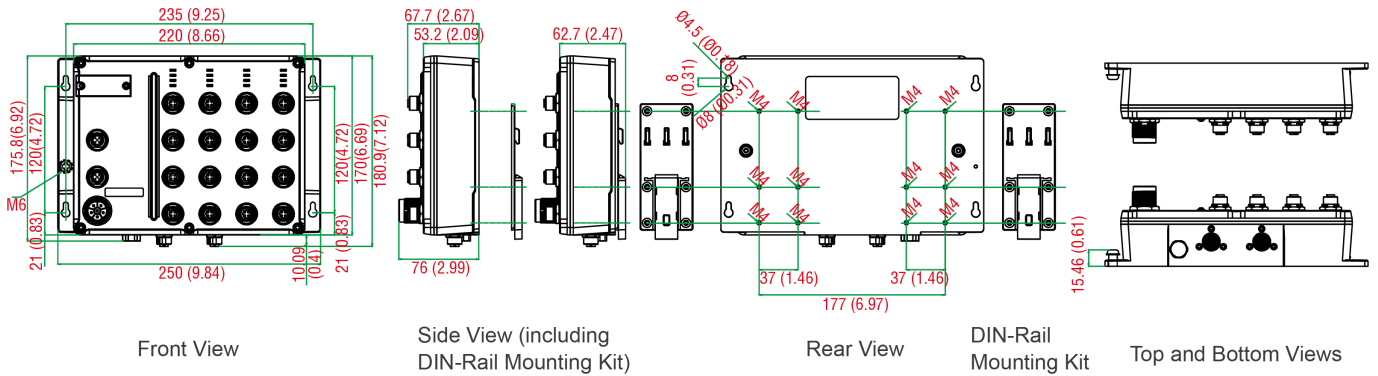



| Model Name                   | 10/100/<br>1000BaseT(X) Ports<br>Q-ODC Fiber<br>Connector | 10/100/<br>1000BaseT(X) Ports<br>M12 X-Coded 8-Pin<br>Female Connector | 10/100/<br>1000BaseT(X) Ports<br>M12 X-Coded 8-Pin<br>Female Connector<br>with Bypass Relay | 10/100BaseT(X)<br>Ports<br>M12 D-Coded 4-Pin<br>Female Connector | PoE Ports<br>10/100BaseT(X),<br>M12 D-Coded 4-Pin<br>Female Connector | Conformal Coating |
|------------------------------|---|--|---|--|---|-------------------|
| TN-5516A-8PoE-WV-CT-T        | -   | -  | -   | 8  | 8   | ✓                 |
| TN-5518A-2GTX-WV-T           | -   | 2  | -   | 16   | -   | -                 |
| TN-5518A-2GTX-WV-CT-T        | -   | 2  | -   | 16   | -   | ✓                 |
| TN-5518A-2GTXBP-WV-T         | -   | -  | 2   | 16   | -   | -                 |
| TN-5518A-2GTXBP-WV-CT-T      | -   | -  | 2   | 16   | -   | ✓                 |
| TN-5518A-8PoE-2GTX-WV-T      | -   | 2  | -   | 8  | 8   | -                 |
| TN-5518A-8PoE-2GTX-WV-CT-T   | -   | 2  | -   | 8  | 8   | ✓                 |
| TN-5518A-8PoE-2GTXBP-WV-T    | -   | -  | 2   | 8  | 8   | -                 |
| TN-5518A-8PoE-2GTXBP-WV-CT-T | -   | -  | 2   | 8  | 8   | ✓                 |

## Accessories (sold separately)

### Storage Kits

|            |  |
|------------|--|
| ABC-01-M12 | Configuration backup and restoration tool with M12 connector for managed Ethernet switches and wireless APs/Bridges/Clients, 0 to 60°C operating temperature |
|------------|--|

### Cables

|                                  |   |
|----------------------------------|---|
| CBL-M12D(MM4P)/RJ45-100 IP67     | M12-to-RJ45 cable, IP67-rated, 1 m  |
| CBL-M23(FF6P)/OPEN-BK-100 IP67   | M23 to 6-pin power cable, IP67-rated female 6-pin M23 connector, IP67, 1 m  |
| CBL-M12DMM4PM12DMM4P-BK-100-IP67 | M12-to-M12 Cat-5E STP Ethernet cable, 4-pin D-coded M12 connector, IP67, 1 m  |
| CBL-M12XMM8P-Y-100-IP67          | M12-to-M12 Cat-5 UTP Ethernet cable, 8-pin male X-coded crimp type M12 connector, IP67, 1 m<br><br>Applicable Models:<br>TN-5510A-2GTX-WV-T<br>TN-5510A-2GTX-WV-CT-T<br>TN-5510A-2GTXBP-WV-T<br>TN-5510A-2GTXBP-WV-CT-T<br>TN-5510A-8PoE-2GTX-WV-T<br>TN-5510A-8PoE-2GTX-WV-CT-T<br>TN-5510A-8PoE-2GTXBP-WV-T<br>TN-5510A-8PoE-2GTXBP-WV-CT-T<br>TN-5518A-2GTX-WV-T<br>TN-5518A-2GTX-WV-CT-T<br>TN-5518A-2GTXBP-WV-T<br>TN-5518A-2GTXBP-WV-CT-T<br>TN-5518A-8PoE-2GTX-WV-T<br>TN-5518A-8PoE-2GTX-WV-CT-T<br>TN-5518A-8PoE-2GTXBP-WV-T<br>TN-5518A-8PoE-2GTXBP-WV-CT-T |
| CBL-M12XMM8P-Y-300-IP67          | M12-to-M12 Cat-5 UTP Ethernet cable, 8-pin male X-coded crimp type M12 connector, IP67, 3 m<br><br>Applicable Models:<br>TN-5510A-2GTX-WV-T<br>TN-5510A-2GTX-WV-CT-T<br>TN-5510A-2GTXBP-WV-T<br>TN-5510A-2GTXBP-WV-CT-T<br>TN-5510A-8PoE-2GTX-WV-T<br>TN-5510A-8PoE-2GTX-WV-CT-T  |

|                             |  |
|-----------------------------|--|
|                             | TN-5510A-8PoE-2GTXBP-WV-T<br>TN-5510A-8PoE-2GTXBP-WV-CT-T<br>TN-5518A-2GTX-WV-T<br>TN-5518A-2GTX-WV-CT-T<br>TN-5518A-2GTXBP-WV-T<br>TN-5518A-2GTXBP-WV-CT-T<br>TN-5518A-8PoE-2GTX-WV-T<br>TN-5518A-8PoE-2GTX-WV-CT-T<br>TN-5518A-8PoE-2GTXBP-WV-T<br>TN-5518A-8PoE-2GTXBP-WV-CT-T  |
| CBL-M12XMM8PRJ45-Y-200-IP67 | M12-to-RJ45 Cat-5 UTP Ethernet cable, 8-pin male X-coded crimp type M12 connector, IP67, 2 m<br><br>Applicable Models:<br>TN-5510A-2GTX-WV-T<br>TN-5510A-2GTX-WV-CT-T<br>TN-5510A-2GTXBP-WV-T<br>TN-5510A-2GTXBP-WV-CT-T<br>TN-5510A-8PoE-2GTX-WV-T<br>TN-5510A-8PoE-2GTX-WV-CT-T<br>TN-5510A-8PoE-2GTXBP-WV-T<br>TN-5510A-8PoE-2GTXBP-WV-CT-T<br>TN-5518A-2GTX-WV-T<br>TN-5518A-2GTX-WV-CT-T<br>TN-5518A-2GTXBP-WV-T<br>TN-5518A-2GTXBP-WV-CT-T<br>TN-5518A-8PoE-2GTX-WV-T<br>TN-5518A-8PoE-2GTX-WV-CT-T<br>TN-5518A-8PoE-2GTXBP-WV-T<br>TN-5518A-8PoE-2GTXBP-WV-CT-T |

#### Connectors

|                     |   |
|---------------------|---|
| M12A-5P-IP68        | A-coded screw-in sensor connector, female, IP68, 4.05 cm  |
| M12D-4PMM-IP67      | M12 D-coded connector, QUICKON type, 4-pin male, IP67   |
| M12D-4P-IP68        | M12 D-coded screw-in sensor connector, male, IP68   |
| A-PLG-WPM23-01-IP67 | M23 cable connector, female 6-pin, crimp type, IP67   |
| M12X-8PMM-IP67-HTG  | X-coded screw-in Gigabit Ethernet connector, 8-pin male M12 connector, IP67<br><br>Applicable Models:<br>TN-5510A-2GTX-WV-T<br>TN-5510A-2GTX-WV-CT-T<br>TN-5510A-2GTXBP-WV-T<br>TN-5510A-2GTXBP-WV-CT-T<br>TN-5510A-8PoE-2GTX-WV-T<br>TN-5510A-8PoE-2GTX-WV-CT-T<br>TN-5510A-8PoE-2GTXBP-WV-T<br>TN-5510A-8PoE-2GTXBP-WV-CT-T<br>TN-5518A-2GTX-WV-T<br>TN-5518A-2GTX-WV-CT-T<br>TN-5518A-2GTXBP-WV-T<br>TN-5518A-2GTXBP-WV-CT-T<br>TN-5518A-8PoE-2GTX-WV-T<br>TN-5518A-8PoE-2GTX-WV-CT-T<br>TN-5518A-8PoE-2GTXBP-WV-T<br>TN-5518A-8PoE-2GTXBP-WV-CT-T |

#### DIN-Rail Mounting Kits

|               |                                 |
|---------------|---------------------------------|
| DK-DC50131-01 | DIN-rail mounting kit, 6 screws |
|---------------|---------------------------------|

#### M12 Connector Caps

|              |                                    |
|--------------|------------------------------------|
| A-CAP-M12F-M | Metal cap for M12 female connector |
| A-CAP-M12M-M | Metal cap for M12 male connector   |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# TN-G6500 Series

EN 50155 Full Gigabit Ethernet switches with up to 8 PoE ports

Preliminary



## Features and Benefits

- 12 Gigabit ports with push-pull M12 connectors
- Isolated power with 24 to 110 VDC power supply range
- Complies with all EN 50155 mandatory test items<sup>1</sup>
- -40 to 70°C operating temperature range
- IP67-rated housing protection
- Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), and RSTP/STP for network redundancy
- 8 IEEE 802.3at/af compliant PoE and Ethernet combo ports
- Provides up to 30 W per PoE port

## Certifications



## Introduction

The ToughNet TN-G6500 Series M12 managed Ethernet switches are designed for railway applications, including rolling stock and wayside installations. The switches use M12 and other circular connectors to ensure tight, robust connections, and guarantee reliable operation in industrial environments where vibration and shock are commonplace. The TN-G6500 Series Ethernet switches provide 12 Gigabit Ethernet M12 ports; 8 ports support IEEE 802.3at/af compliant PoE functionality. These PoE switches are classified as power source equipment (PSE); they provide up to 30 watts of power per port, and can be used to power IEEE 802.3at/af compliant powered devices (PDs), such as IP cameras, wireless access points, and IP phones.

The TN-G6500 Series has push-pull M12 connectors that are tailor-made for push-pull cables in order to facilitate quick installation, and also allow M12 rotary cables to be utilized. The 24 to 110 VDC wide power input range and isolated dual-power inputs not only allow you to use the same type of power source at different sites around the globe, but also increase the reliability of your communications system. Furthermore, the -40 to 70°C operating temperature and IP67-rated enclosure allow deployment in harsh environments. The TN-G6512 Series Ethernet switches are compliant with the essential sections of the EN 50155 standard, covering operating temperature, power input voltage, surge, ESD, vibration, power isolation, and includes a model with conformal coating to ensure suitability for a variety of industrial applications.

## Additional Features and Benefits

- Provides up to 30 watts per PoE port with a total power budget of 96 watts per switch
- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and GMRP for filtering multicast traffic
- EtherNet/IP and Modbus/TCP industrial Ethernet protocols supported
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and ToS/DiffServ) allows real-time traffic classification and prioritization
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- SNMPv1/v2c/v3 for different levels of network management
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- RMON for efficient network monitoring and proactive capability
- Bandwidth management prevents unpredictable network status
- Lock port allows access by only authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Line-swap fast recovery
- LLDP for automatic topology discovery in network management software
- Configurable by web browser, Telnet/serial console, CLI, and Windows utility
- Loop protection prevents network loops
- Panel mounting installation capability

1. This product is suitable for rolling stock railway applications, as defined by the EN 50155 standard. For a more detailed statement, click here: [www.moxa.com/doc/specs/EN\\_50155\\_Combpliance.pdf](http://www.moxa.com/doc/specs/EN_50155_Combpliance.pdf)



## Specifications

### Ethernet Interface

|  |  |
|--|--|
| 10/100/1000BaseT(X) Ports (M12 X-coded 8-pin female connector)   | 4  |
| PoE Ports (100/1000BaseT(X), M12 X-coded 8-pin female connector) | 8  |
| Standards  | IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1p for Class of Service<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1s for Multiple Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol<br>IEEE 802.1X for authentication<br>IEEE 802.3 for 10BaseT<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3ad for Port Trunk with LACP<br>IEEE 802.3af/at for PoE/PoE+ output<br>IEEE 802.3x for flow control<br>IEEE 802.3u for 100BaseT(X) |

### Ethernet Software Features

|                       |   |
|-----------------------|---|
| Broadcast Forwarding  | IP directed broadcast, broadcast forwarding   |
| Configuration Options | Command Line Interface (CLI), Command Line Interface (CLI) through Serial/Telnet/SSH, Web Console (HTTP/HTTPS), Windows Utility   |
| Filter                | 802.1Q, GMRP, GVRP, IGMP v1/v2, Port-based VLAN, Static Multicast   |
| Industrial Protocols  | SNMPv1/v2c/v3   |
| Management            | Account Management, Back Pressure Flow Control, DHCP Option 66/67/82, DHCP Server/Client, Flow control, HTTP, IPv4/IPv6, LLDP, Port Mirror, QoS/CoS/ToS, RARP, RMON, SMTP, SNMP Inform, Syslog, Telnet, SNMP Trap |
| MIB                   | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB   |
| Redundancy Protocols  | Link Aggregation, MSTP, RSTP, STP, Turbo Chain, Turbo Ring v1/v2, Turbo Ring with DRC   |
| Security              | TACACS+, Broadcast storm protection, HTTPS/SSL, Local Account Accessibility, Port Lock, RADIUS, Rate Limit, SSH   |
| Time Management       | NTP Server/Client, SNTP   |

### Switch Properties

|                   |               |
|-------------------|---------------|
| IGMP Groups       | 256           |
| Max. No. of VLANs | 256           |
| Priority Queues   | 4             |
| VLAN ID Range     | VID 1 to 4094 |

### LED Interface

|                |  |
|----------------|--|
| LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL, 10/100/1000M, PoE |
|----------------|--|

### Serial Interface

|              |   |
|--------------|---|
| Console Port | RS-232 (M12 B-coded 5-pin female connector) |
|--------------|---|

### Power Parameters

|                     |                        |
|---------------------|------------------------|
| Input Voltage       | 24/36/48/72/96/110 VDC |
| No. of Power Inputs | 2                      |

|                             |                                  |
|-----------------------------|----------------------------------|
| Operating Voltage           | 16.8 to 137.5 VDC                |
| Overload Current Protection | Supported                        |
| Reverse Polarity Protection | Supported                        |
| Total PoE Power Budget      | 96 W                             |
| Input Current               | 5.8 A @ 24 VDC                   |
| Power Connector             | M12 K-coded 5-pin male connector |

#### Physical Characteristics

|              |   |
|--------------|---|
| Housing      | Metal   |
| IP Rating    | IP67  |
| Dimensions   | 159 x 97 x 100 mm (6.26 x 3.82 x 3.94 in)     |
| Weight       | 1,750 g (3.86 lb)                             |
| Installation | Wall mounting                                 |
| Protection   | TN-G6512-8GPoE-WV-CT-T: PCB conformal coating |

#### Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -40 to 70°C (-40 to 158°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |
| Altitude                               | 2000 m                     |

#### Standards and Certifications

|                         |  |
|-------------------------|--|
| EMC                     | EN 55032/24  |
| EMS                     | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 6 GHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Freefall                | IEC 60068-2-31   |
| Radio Frequency         | FCC  |
| Railway                 | EN 50121-4, EN 50155, IEC 60571  |
| Railway Fire Protection | EN 45545-2   |
| Safety                  | UL 61010-2-201, IEC 60950-1  |
| Shock                   | IEC 60068-2-27, IEC 61373, EN 50155  |
| Vibration               | IEC 60068-2-64, IEC 61373, EN 50155  |

#### Declaration

|               |                   |
|---------------|-------------------|
| Green Product | RoHS, CRoHS, WEEE |
|---------------|-------------------|

## MTBF

|           |                 |
|-----------|-----------------|
| Time      | 471,356 hrs     |
| Standards | Telcordia SR332 |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|                  |  |
|------------------|--|
| Device           | 1 x TN-G6500 Series switch   |
| Installation Kit | 1 x wall-mounting kit<br>1 x cap, male, metal, for M12 port<br>14 x cap, female, metal, for M12 port |
| Cable            | 1 x M12-to-DB9 console port  |
| Documentation    | 1 x quick installation guide<br>1 x warranty card  |

## Dimensions

Unit: mm (inch)

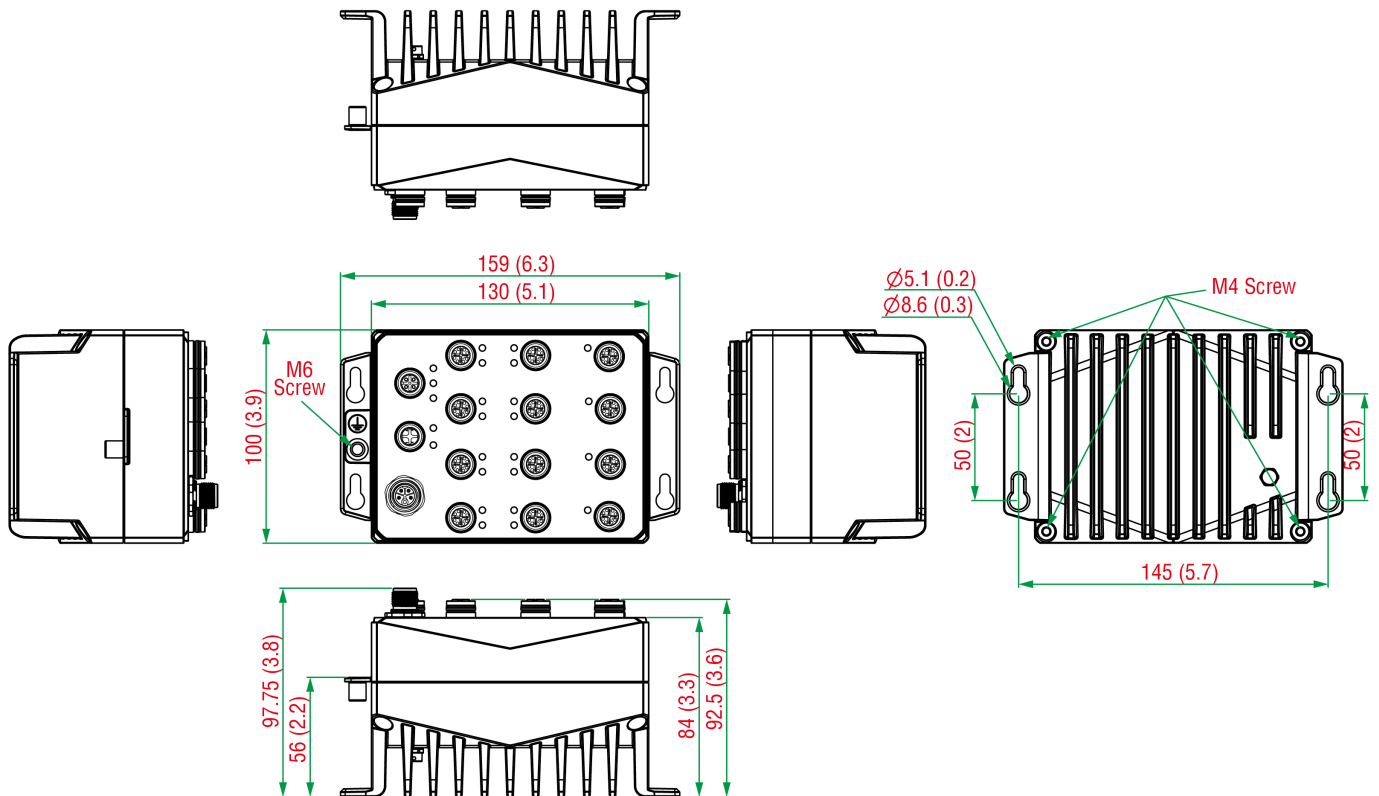

## Ordering Information

| Model Name             | 10/100/1000BaseT(X) Ports,<br>M12 X-Coded 8-Pin Female Connector | PoE Ports 100/1000BaseT(X),<br>M12 X-Coded 8-Pin Female Connector | Conformal Coating |
|------------------------|--|---|-------------------|
| TN-G6512-8GPoE-WV-T    | 4  | 8   | -                 |
| TN-G6512-8GPoE-WV-CT-T | 4  | 8   | ✓                 |

## Accessories (sold separately)

### Storage Kits

|                  |  |
|------------------|--|
| ABC-02-P-USB-M12 | Configuration backup and restoration tool with M12 connector for Moxa's ToughNet series of managed Ethernet switches and wireless AP/bridge/client, -40 to 75°C operating temperature, conformal coating |
|------------------|--|

### M12 Connector Caps

|                 |  |
|-----------------|--|
| A-CAP-M12M-M    | Metal cap for M12 male connector             |
| A-CAP-M12F-M-PP | Metal cap for M12 female push-pull connector |

### Connectors

|                    |   |
|--------------------|---|
| M12X-8PMM-IP67-HTG | X-coded screw-in Gigabit Ethernet connector, 8-pin male M12 connector, IP67 |
|--------------------|---|

### Cables

|                             |  |
|-----------------------------|--|
| CBL-M12XMM8P-Y-300-IP67     | M12-to-M12 Cat-5 UTP Ethernet cable, 8-pin male X-coded crimp type M12 connector, IP67, 3 m  |
| CBL-M12XMM8PRJ45-Y-200-IP67 | M12-to-RJ45 Cat-5 UTP Ethernet cable, 8-pin male X-coded crimp type M12 connector, IP67, 2 m |
| CBL-M12XMM8P-Y-100-IP67     | M12-to-M12 Cat-5 UTP Ethernet cable, 8-pin male X-coded crimp type M12 connector, IP67, 1 m  |

© Moxa Inc. All rights reserved. Updated Jan 15, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# TSN-G5004 Series

## 4G-port full Gigabit managed Ethernet switch



### Features and Benefits

- Compact and flexible housing design to fit into confined spaces
- Web-based GUI for easy device configuration and management
- Security features based on IEC 62443
- IP40-rated metal housing

### Certifications



## Introduction

The TSN-G5004 Series switches are ideal for making manufacturing networks compatible with the vision of Industry 4.0. The switches are equipped with 4 Gigabit Ethernet ports. The full Gigabit design makes them a good choice for upgrading an existing network to Gigabit speed or for building a new full-Gigabit backbone for future high-bandwidth applications. The compact design and user-friendly configuration interfaces provided by the new Moxa web GUI make network deployment much easier. In addition, future firmware upgrades of the TSN-G5004 Series will support real-time communication using standard Ethernet Time-Sensitive Networking (TSN) technology.

## Specifications

### Ethernet Interface

|  |  |
|--|--|
| Standards                                  | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseX<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1p for Class of Service<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | 4<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, LLDP, SMTP, SNMP Inform, SNMPv1/v2c/v3, SNMP Trap, DHCP Server/Client, ARP, TFTP, SFTP, HTTP, HTTPS, SSH, Telnet, Private MIB, Syslog |
| MIB                  | RFC1213, Ethernet-like MIB, IF MIB, LLDP MIB, Bridge MIB, Q-BRIDGE MIB, IEEE8021-PAE-MIB, IEEE8021-SPANNING-TREE-MIB, SNMPv2-MIB                 |
| Redundancy Protocols | RSTP, STP  |
| Security             | Broadcast storm protection, Trust access control, Login and Password Policy, HTTPS/SSL, SSH, SNMPv3, RADIUS, TACACS+                             |
| Time Management      | SNTP, NTP Server/Client  |
| Filter               | 802.1Q VLAN, Static Multicast  |

## Switch Properties

|                    |               |
|--------------------|---------------|
| MAC Table Size     | 9 K           |
| Max. No. of VLANs  | 256           |
| VLAN ID Range      | VID 1 to 4094 |
| Packet Buffer Size | 2 Mbits       |

## Serial Interface

|              |  |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

## USB Interface

|               |                       |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Alarm Contact Channels | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                | Reset button  |
| Digital Input Channels | 1   |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |

## LED Interface

|                |                                |
|----------------|--------------------------------|
| LED Indicators | STATE, FAULT, PWR1, PWR2, SYNC |
|----------------|--------------------------------|

## Power Parameters

|                             |   |
|-----------------------------|---|
| Connection                  | 2 removable 4-contact terminal block(s) |
| Input Voltage               | 12 to 48 VDC, Redundant dual inputs     |
| Operating Voltage           | 9.6 to 60 VDC                           |
| Input Current               | 1.25 A @ 12 VDC                         |
| Overload Current Protection | Supported                               |
| Reverse Polarity Protection | Supported                               |

## Physical Characteristics

|              |  |
|--------------|--|
| Housing      | Metal  |
| IP Rating    | IP40   |
| Dimensions   | 25 x 135 x 115 mm (0.98 x 5.32 x 4.53 in)            |
| Weight       | 582 g (1.28 lb)                                      |
| Installation | DIN-rail mounting, Wall mounting (with optional kit) |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | UL 61010-2-201, EN 62368-1   |
| EMC       | EN 55032/35  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Shock     | IEC 60068-2-27   |
| Freefall  | IEC 60068-2-32   |
| Vibration | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 848,997 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x TSN-G5004 switch  |
| Cable         | 1 x RJ45-to-DB9 console cable   |
| Documentation | 1 x quick installation guide<br>1 x warranty card<br>1 x substance disclosure table<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese |
| Connectors    | 2 x Terminal blocks   |





|                |  |
|----------------|--|
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |

### Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

### Wall-Mounting Kits

|          |   |
|----------|---|
| WK-30-02 | Wall-mounting kit, 2 plates, 4 screws, 30 x 66.8 x 2 mm |
|----------|---|

© Moxa Inc. All rights reserved. Updated Jul 02, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

# TSN-G5008 Series

## 8G-port full Gigabit managed Ethernet switch



### Features and Benefits

- Compact and flexible housing design to fit into confined spaces
- Web-based GUI for easy device configuration and management
- Security features based on IEC 62443
- IP40-rated metal housing

### Certifications



## Introduction

The TSN-G5008 Series switches are ideal for making manufacturing networks compatible with the vision of Industry 4.0. The switches are equipped with 8 Gigabit Ethernet ports and up to 2 fiber-optic ports. The full Gigabit design makes them a good choice for upgrading an existing network to Gigabit speed or for building a new full-Gigabit backbone for future high-bandwidth applications. The compact design and user-friendly configuration interfaces provided by the new Moxa web GUI make network deployment much easier. In addition, future firmware upgrades of the TSN-G5008 Series will support real-time communication using standard Ethernet Time-Sensitive Networking (TSN) technology.

## Specifications

### Ethernet Interface

|   |  |
|---|--|
| Standards   | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3ab for 1000BaseT(X)<br>IEEE 802.3z for 1000BaseX<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1p for Class of Service<br>IEEE 802.1D-2004 for Spanning Tree Protocol<br>IEEE 802.1w for Rapid Spanning Tree Protocol |
| 10/100/1000BaseT(X) Ports (RJ45 connector)            | 6<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 2<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection  |

### Ethernet Software Features

|                      |  |
|----------------------|--|
| Management           | IPv4/IPv6, LLDP, SMTP, SNMP Inform, SNMPv1/v2c/v3, SNMP Trap, DHCP Server/Client, ARP, TFTP, SFTP, HTTP, HTTPS, SSH, Telnet, Private MIB, Syslog |
| MIB                  | RFC1213, Ethernet-like MIB, IF MIB, LLDP MIB, Bridge MIB, Q-BRIDGE MIB, IEEE8021-PAE-MIB, IEEE8021-SPANNING-TREE-MIB, SNMPv2-MIB                 |
| Redundancy Protocols | RSTP, STP  |
| Security             | Broadcast storm protection, Trust access control, Login and Password Policy, HTTPS/SSL, SSH, SNMPv3, RADIUS, TACACS+                             |

|                                 |   |
|---------------------------------|---|
| Time Management                 | SNTP, NTP Server/Client   |
| Filter                          | 802.1Q VLAN, Static Multicast   |
| <b>Switch Properties</b>        |   |
| MAC Table Size                  | 9 K   |
| Max. No. of VLANs               | 256   |
| VLAN ID Range                   | VID 1 to 4094   |
| Packet Buffer Size              | 4 Mbits   |
| <b>Serial Interface</b>         |   |
| Console Port                    | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1)                            |
| <b>USB Interface</b>            |   |
| USB Connector                   | USB Type A (Reserved)   |
| <b>Input/Output Interface</b>   |   |
| Alarm Contact Channels          | 1, Relay output with current carrying capacity of 1 A @ 24 VDC                  |
| Buttons                         | Reset button  |
| Digital Input Channels          | 1   |
| Digital Inputs                  | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA |
| <b>LED Interface</b>            |   |
| LED Indicators                  | STATE, FAULT, PWR1, PWR2, SYNC  |
| <b>Power Parameters</b>         |   |
| Connection                      | 2 removable 4-contact terminal block(s)   |
| Input Voltage                   | 12 to 48 VDC, Redundant dual inputs   |
| Operating Voltage               | 9.6 to 60 VDC   |
| Input Current                   | 1.72 A @ 12 VDC   |
| Overload Current Protection     | Supported   |
| Reverse Polarity Protection     | Supported   |
| <b>Physical Characteristics</b> |   |
| Housing                         | Metal   |
| IP Rating                       | IP40  |
| Dimensions                      | 36 x 135 x 115 mm (1.42 x 5.32 x 4.53 in)                                       |
| Weight                          | 787 g (1.74 lb)   |
| Installation                    | DIN-rail mounting, Wall mounting (with optional kit)                            |

## Environmental Limits

|  |                            |
|--|----------------------------|
| Operating Temperature                  | -10 to 60°C (14 to 140°F)  |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

## Standards and Certifications

|           |  |
|-----------|--|
| Safety    | UL 61010-2-201, EN 62368-1   |
| EMC       | EN 55032/35  |
| EMI       | CISPR 32, FCC Part 15B Class A   |
| EMS       | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Shock     | IEC 60068-2-27   |
| Freefall  | IEC 60068-2-32   |
| Vibration | IEC 60068-2-6  |

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 809,568 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|               |   |
|---------------|---|
| Device        | 1 x TSN-G5008-2GTXSFP switch  |
| Cable         | 1 x RJ45-to-DB9 console cable   |
| Documentation | 1 x quick installation guide<br>1 x warranty card<br>1 x substance disclosure table<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese |
| Connectors    | 2 x Terminal blocks   |

## Dimensions

Unit: mm (inch)

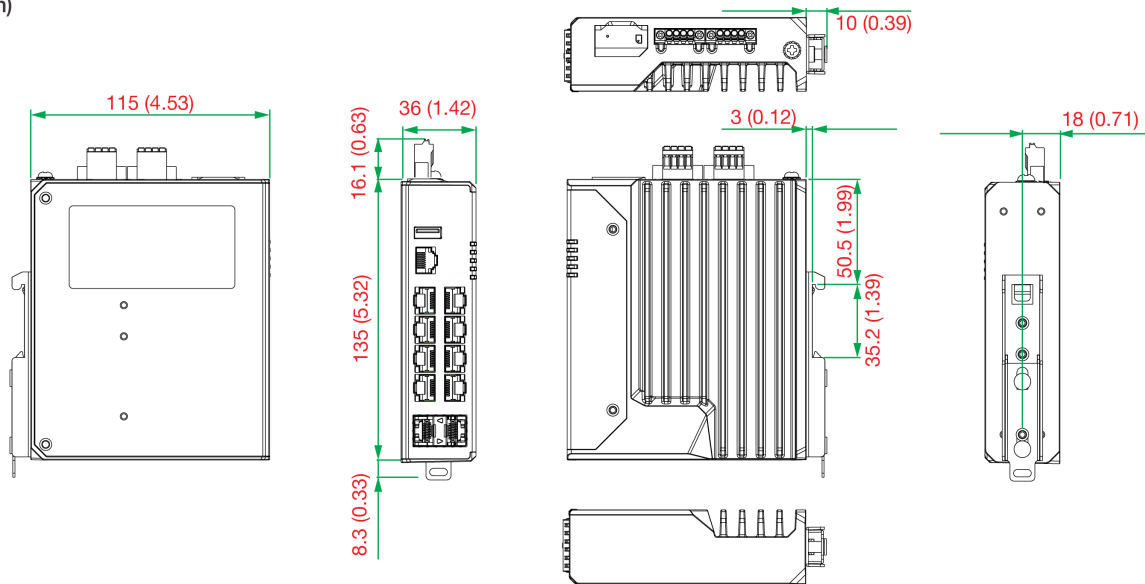

## Ordering Information

| Model Name        | Layer | No. of Ports | 10/100/1000BaseT(X) Ports<br>RJ45 Connector | Combo Ports<br>10/100/1000BaseT(X) or<br>100/1000BaseSFP | Operating Temp. |
|-------------------|-------|--------------|---|--|-----------------|
| TSN-G5008-2GTXSFP | 2     | 8            | 6   | 2  | -10 to 60°C     |

## Accessories (sold separately)

### SFP Modules

|                 |   |
|-----------------|---|
| SFP-1GEZXLC     | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature      |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHLC      | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLHLC-T    | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXLC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXLC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GLSXLC     | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature    |
| SFP-1GLSXLC-T   | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC      | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T    | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GSXLC      | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T    | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC      | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |

|                |  |
|----------------|--|
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature   |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature  |
| SFP-1G10ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC    | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T  | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1FELLC-T   | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FEMLC-T   | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T   | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |

## Power Supplies

|           |   |
|-----------|---|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

## Wall-Mounting Kits

|          |   |
|----------|---|
| WK-30-02 | Wall-mounting kit, 2 plates, 4 screws, 30 x 66.8 x 2 mm |
|----------|---|

© Moxa Inc. All rights reserved. Updated Jun 19, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.