

ICS-G7826A Series

24G+2 10GbE-port Layer 3 full Gigabit managed Ethernet switches



Features and Benefits

- 24 Gigabit Ethernet ports plus up to 2 10G Ethernet ports
- Up to 26 optical fiber connections (SFP slots)
- Fanless, -10 to 60°C operating temperature range
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7826A Series is equipped with 24 Gigabit Ethernet ports plus up to 2 10 Gigabit Ethernet ports, and support Layer 3 routing functionality to facilitate the deployment of applications across networks, making them ideal for large-scale industrial networks.

The ICS-G7826A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- Automatic warning by exception through email and relay output
- Redundant, dual AC power inputs
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Digital inputs for integrating sensors and alarms with IP networks

Specifications

Ethernet Interface

| | |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | ICS-G7826A-4GTXSFP-2XG-HV-HV: 20 ICS-G7826A-8GSFP-4GTXSFP-2XG-HV-HV: 12 |
| 100/1000BaseSFP Ports | ICS-G7826A-8GSFP-4GTXSFP-2XG-HV-HV: 8 ICS-G7826A-20GSFP-4GTXSFP-2XG-HV-HV: 20 |
| 10GbE SFP+ Slots | 2 |

| | |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4 |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3ae for 10 Gigabit Ethernet IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

Ethernet Software Features

| | |
|----------------------|--|
| Management | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, QinQ VLAN |
| Multicast Routing | DVMRP, PIM-DM, PIM-SM, PIM-SSM |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON |
| Routing Redundancy | VRRP |
| Security | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+ |
| Time Management | NTP Server/Client, SNTP |
| Unicast Routing | OSPF, RIPv1/V2, Static Route |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET |
| MIB | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB |

Switch Properties

| | |
|--------------------|---------------|
| DRAM | 128 MB |
| Flash | 16 MB |
| IGMP Groups | 4096 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| Packet Buffer Size | 12 Mbits |
| VLAN ID Range | VID 1 to 4094 |
| Priority Queues | 8 |

USB Interface

| | |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

Serial Interface

| | |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

Input/Output Interface

| | |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC |
| Digital Inputs | +13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA |

Power Parameters

| | |
|-----------------------------|---------------------------------------|
| Input Voltage | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | 0.83/0.47 A @ 110/220 VAC |

Physical Characteristics

| | |
|--------------|---|
| IP Rating | IP30 |
| Dimensions | 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in) |
| Weight | 5500 g (12.14 lb) |
| Installation | Rack mounting |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|-----------|--|
| Safety | EN 60950-1, UL 60950-1 |
| EMC | EN 55032/24 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |
| MTBF | |
| Time | 428,165 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents

| | |
|------------------|--|
| Device | 1 x ICS-G7826A Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 2 x rack-mounting ear 10 x cap, plastic, for SFP slot (ICS-G7826A-4GTXSFP-2XG-HV-HV) 18 x cap, plastic, for SFP slot (ICS-G7826A-8GSFP-4GTXSFP-2XG-HV-HV) 30 x cap, plastic, for SFP slot (ICS-G7826A-20GSFP-4GTXSFP-2XG-HV-HV) |
| Power Supply | 1 x power cord, EU type 1 x power cord, US type |
| Documentation | 1 x document and software CD 1 x warranty card |
| Note | SFP modules need to be purchased separately for use with this product. |

Dimensions

Unit: mm (inch)

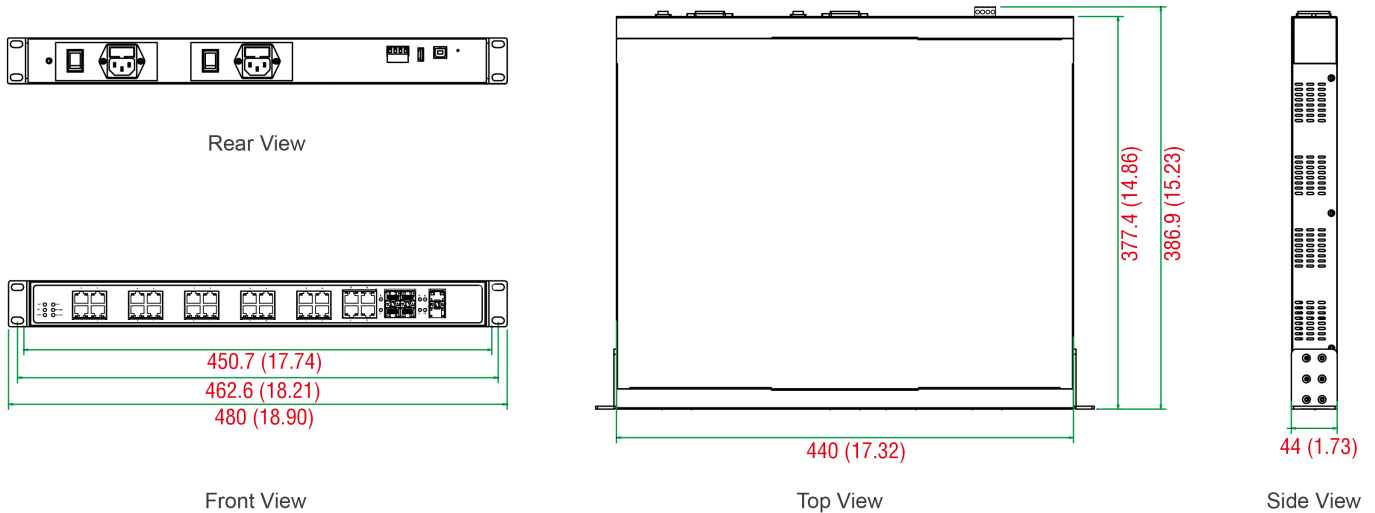

Ordering Information

| Model Name | Layer | 10GbE SFP+ Slots | Combo Ports 10/100/ 1000BaseT(X) or 100/1000BaseSFP+ | 100/1000Base SFP Slots | 10/100/ 1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-------------------------------------|-------|------------------|---|---------------------------|---|-----------------|
| ICS-G7826A-4GTXSFP-2XG-HV-HV | 3 | 2 | 4 | 0 | 20 | -10 to 60°C |
| ICS-G7826A-8GSFP-4GTXSFP-2XG-HV-HV | 3 | 2 | 4 | 8 | 12 | -10 to 60°C |
| ICS-G7826A-20GSFP-4GTXSFP-2XG-HV-HV | 3 | 2 | 4 | 20 | 0 | -10 to 60°C |

Accessories (sold separately)

Storage Kits

| | |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC-T | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXC | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-10GERLC | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-10GLRLC | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-10GSRLC | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Cords

| | |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m |
| PWC-C7AU-2B-183 | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m |
| PWC-C7EU-2B-183 | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183 | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m |
| PWC-C7US-2B-183 | Power cord with United States (US) plug, 10A/125V, 1.83 m |

Software

| | |
|-------------------|--|
| MXview-50 | Industrial network management software with a license for 50 nodes (by IP address) |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |
| MXview-2000 | Industrial network management software with a license for 2000 nodes (by IP address) |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

ICS-G7828A Series

24G+4 10GbE-port Layer 2/Layer 3 full Gigabit managed Ethernet switches



Features and Benefits

- 24 Gigabit Ethernet ports plus up to 4 10G Ethernet ports
- Up to 28 optical fiber connections (SFP slots)
- Fanless, -10 to 60°C operating temperature range
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7828A Series is equipped with 24 Gigabit Ethernet ports plus up to 4 10 Gigabit Ethernet ports, and support Layer 3 routing functionality to facilitate the deployment of applications across networks, making them ideal for large-scale industrial networks.

The ICS-G7828A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs

Specifications

Ethernet Interface

| | |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | ICS-G7828A-4GTXSFP-4XG-HV-HV: 20 ICS-G7828A-8GSFP-4GTXSFP-4XG-HV-HV: 12 |
| 100/1000BaseSFP Ports | ICS-G7828A-8GSFP-4GTXSFP-4XG-HV-HV: 8 ICS-G7828A-20GSFP-4GTXSFP-4XG-HV-HV: 20 |
| 10GbE SFP+ Slots | 4 |

| | |
|---|---|
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4 |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3ae for 10 Gigabit Ethernet IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3ae for 10 Gigabit Ethernet |

Ethernet Software Features

| | |
|----------------------|--|
| Management | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, QinQ VLAN |
| Multicast Routing | DVMRP, PIM-DM, PIM-SM, PIM-SSM |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON |
| Routing Redundancy | VRRP |
| Security | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+ |
| Time Management | NTP Server/Client, SNTP |
| Unicast Routing | OSPF, RIPV1/V2, Static Route |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET |
| MIB | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB |

Switch Properties

| | |
|--------------------|---------------|
| DRAM | 128 MB |
| Flash | 16 MB |
| IGMP Groups | 4096 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| Packet Buffer Size | 12 Mbits |
| VLAN ID Range | VID 1 to 4094 |
| Priority Queues | 8 |

USB Interface

| | |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

Serial Interface

| | |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

Input/Output Interface

| | |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC |
| Digital Inputs | +13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA |

Power Parameters

| | |
|-----------------------------|---------------------------------------|
| Input Voltage | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | 0.99/0.65 A @ 110/220 VAC |

Physical Characteristics

| | |
|--------------|---|
| IP Rating | IP30 |
| Dimensions | 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in) |
| Weight | 5500 g (12.14 lb) |
| Installation | Rack mounting |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|-----------|--|
| Safety | EN 60950-1, UL 60950-1 |
| EMC | EN 55032/24 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |

MTBF

| | |
|-----------|--------------------------|
| Time | 411,819 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents

| | |
|------------------|--|
| Device | 1 x ICS-G7828A Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 2 x rack-mounting ear 12 x cap, plastic, for SFP slot (ICS-G7828A-4GTXSFP-4XG-HV-HV) 20 x cap, plastic, for SFP slot (ICS-G7828A-8GSFP-4GTXSFP-4XG-HV-HV) 32 x cap, plastic, for SFP slot (ICS-G7828A-20GSFP-4GTXSFP-4XG-HV-HV) |
| Power Supply | 1 x power cord, EU type 1 x power cord, US type |
| Documentation | 1 x document and software CD 1 x warranty card |
| Note | SFP modules need to be purchased separately for use with this product. |

Dimensions

Unit: mm (inch)

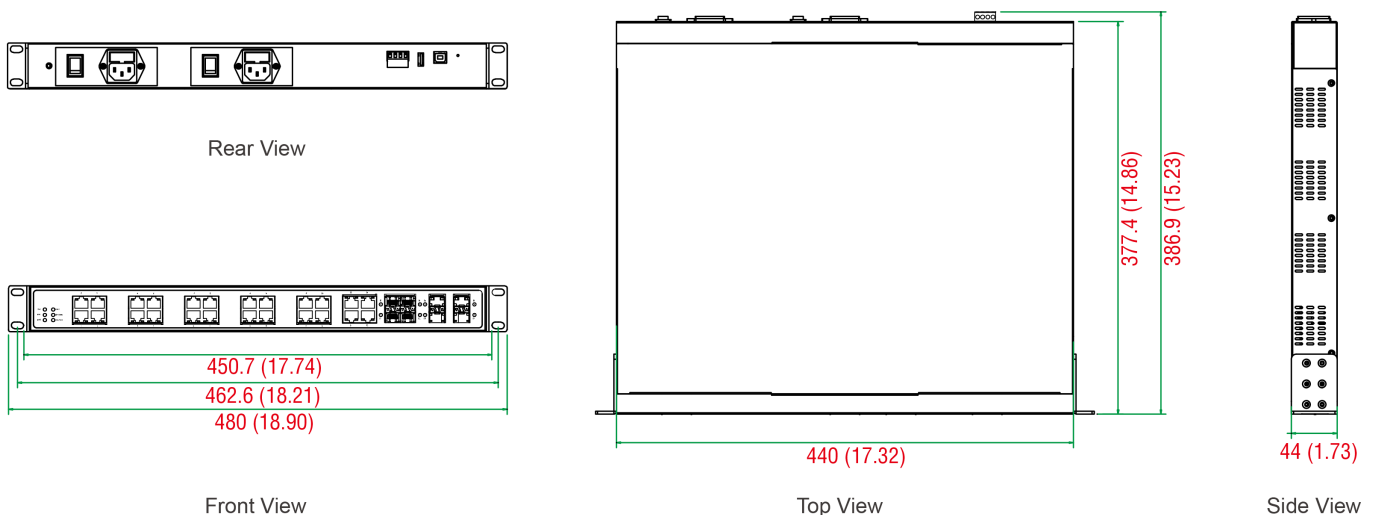

Ordering Information

| Model Name | Layer | 10GbE SFP+ Slots | Combo Ports 10/100/ 1000BaseT(X) or 100/1000BaseSFP+ | 100/1000Base SFP Slots | 10/100/ 1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-------------------------------------|-------|------------------|---|---------------------------|---|-----------------|
| ICS-G7828A-4GTXSFP-4XG-HV-HV | 3 | 4 | 4 | 0 | 20 | -10 to 60°C |
| ICS-G7828A-8GSFP-4GTXSFP-4XG-HV-HV | 3 | 4 | 4 | 8 | 12 | -10 to 60°C |
| ICS-G7828A-20GSFP-4GTXSFP-4XG-HV-HV | 3 | 4 | 4 | 20 | 0 | -10 to 60°C |

Accessories (sold separately)

Storage Kits

| | |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC-T | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-10GERLC | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-10GLRLC | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-10GSRLC | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Cords

| | |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m |
| PWC-C7AU-2B-183 | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m |
| PWC-C7EU-2B-183 | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183 | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m |
| PWC-C7US-2B-183 | Power cord with United States (US) plug, 10A/125V, 1.83 m |

Software

| | |
|-------------------|--|
| MXview-50 | Industrial network management software with a license for 50 nodes (by IP address) |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |
| MXview-2000 | Industrial network management software with a license for 2000 nodes (by IP address) |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

ICS-G7848A Series

48G Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Up to 48 Gigabit Ethernet ports
- Up to 48 optical fiber connections (SFP slots)
- Up to 48 PoE+ ports with external power supply (with IM-G7000A-4PoE module)
- Fanless, -10 to 60°C operating temperature range
- Modular design for maximum flexibility and hassle-free future expansion
- Hot-swappable interface and power modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7848A Series full Gigabit backbone switches' modular design makes network planning easy, and allows greater flexibility by letting you install up to 48 Gigabit Ethernet ports. The ICS-G7848A Series also supports Layer 3 routing functionality to facilitate the deployment of applications across networks, making them ideal for large-scale industrial networks.

The ICS-G7848A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks (ICS-G7800A Series)
- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics (with IM-G7000A-4PoE module)
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output

Specifications

Ethernet Interface

| | |
|------------------|---|
| Slot Combination | 12 slots for 4-port interface modules (10/100/1000BaseT(X), or PoE+ 10/100/1000BaseT(X), or 100/1000BaseSFP slots) ¹ |
|------------------|---|

Input/Output Interface

| | |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC |
| Digital Inputs | +13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA |

Ethernet Interface

| | |
|-----------|--|
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3af/at for PoE/PoE+ output |
|-----------|--|

Ethernet Software Features

| | |
|----------------------|--|
| Management | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, QinQ VLAN |
| Multicast Routing | DVMRP, PIM-DM, PIM-SM, PIM-SSM |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON |
| Routing Redundancy | VRRP |
| Security | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+ |
| Time Management | NTP Server/Client, SNTP |
| Unicast Routing | OSPF, RIPV1/V2, Static Route |
| Industrial Protocols | EtherNet/IP, Modbus TCP |
| MIB | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB |

Switch Properties

| | |
|-------------------|--------|
| DRAM | 128 MB |
| Flash | 16 MB |
| IGMP Groups | 4096 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |

1. See the IM-G7000A datasheet for Gigabit Ethernet module product information.

| | |
|--------------------|---------------|
| Packet Buffer Size | 12 Mbits |
| VLAN ID Range | VID 1 to 4094 |
| Priority Queues | 8 |

USB Interface

| | |
|--------------|------------|
| Storage Port | USB Type A |
|--------------|------------|

Serial Interface

| | |
|--------------|---------------------------------------|
| Console Port | USB-serial console (Type B connector) |
|--------------|---------------------------------------|

Power Parameters

| | |
|-----------------------------|---------------------------------------|
| Input Voltage | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | 0.87/0.51 A @ 110/220 VAC |

Physical Characteristics

| | |
|--------------|--|
| IP Rating | IP30 |
| Dimensions | 440 x 176 x 523.8 mm (17.32 x 6.93 x 20.62 in) |
| Weight | 12,900 g (28.5 lb) |
| Installation | Rack mounting |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|-----------|--|
| Safety | EN 60950-1, UL 60950-1 |
| EMC | EN 55032/24 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |

MTBF

| | |
|-----------|--------------------------|
| Time | 314,973 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents


| | |
|------------------|--|
| Device | 1 x ICS-G7848A Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 2 x rack-mounting ear 4 x cap, plastic, for SFP slot |
| Power Supply | 1 x power cord, EU type 1 x power cord, US type |
| Documentation | 1 x document and software CD 1 x warranty card |
| Note | 48 V external power supply, SFP modules and/or modules from the IM-G7000A Module Series need to be purchased separately for use with this product. |

Dimensions


Unit: mm (inch)

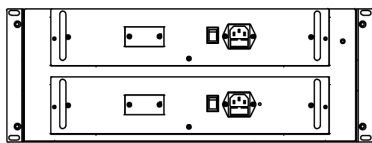


Rear View

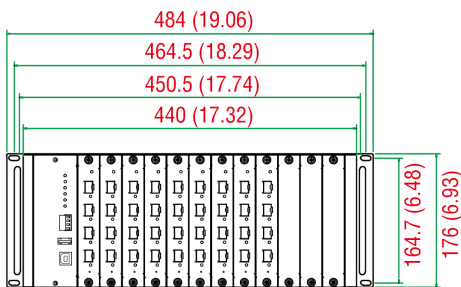

Front View

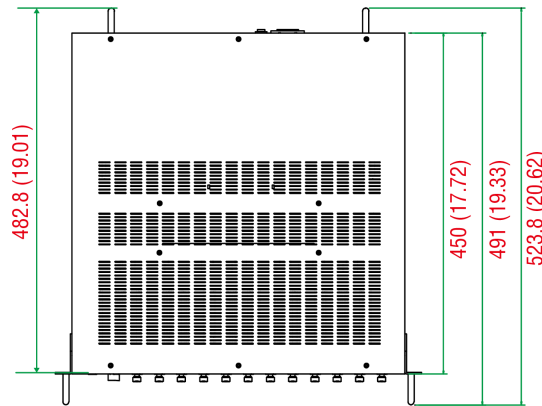

Top View

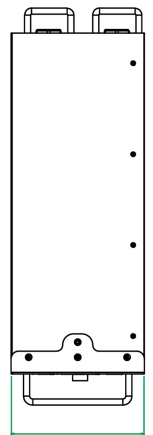

Side View

Ordering Information

| Model Name | Layer | 10GbE SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|------------------|-------|------------------|------------------------|--|-----------------|
| ICS-G7848A-HV-HV | 3 | 0 | Up to 48 | Up to 48 | -10 to 60°C |

Accessories (sold separately)

IM-G7000A Module Series

| | |
|-----------------|--|
| IM-G7000A-4GSFP | Gigabit Ethernet interface module with 4 100/1000BaseSFP slots, -10 to 60°C operating temperature |
| IM-G7000A-4GTX | Gigabit Ethernet interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |
| IM-G7000A-4PoE | Gigabit Ethernet PoE+ interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |

Power Supplies

| | |
|---------------|--|
| PWR-G7000A-AC | 85 to 264 VAC power supply module for the ICS-G7748A/G7750A/G7752A/G7848A/G7850A/G7852A Series |
|---------------|--|

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |

| | |
|---------------|---|
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-10GERLC | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-10GLRLC | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-10GSRLC | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature |

Power Cords

| | |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m |
| PWC-C7AU-2B-183 | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m |
| PWC-C7EU-2B-183 | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183 | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m |
| PWC-C7US-2B-183 | Power cord with United States (US) plug, 10A/125V, 1.83 m |

Software

| | |
|-------------------|--|
| MXview-50 | Industrial network management software with a license for 50 nodes (by IP address) |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |
| MXview-2000 | Industrial network management software with a license for 2000 nodes (by IP address) |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

Storage Kits

| | |
|--------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jun 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

ICS-G7850A Series

48G+2 10GbE Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Up to 48 Gigabit Ethernet ports plus 2 10G Ethernet ports
- Up to 50 optical fiber connections (SFP slots)
- Up to 48 PoE+ ports with external power supply (with IM-G7000A-4PoE module)
- Fanless, -10 to 60°C operating temperature range
- Modular design for maximum flexibility and hassle-free future expansion
- Hot-swappable interface and power modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7850A Series full Gigabit backbone switches' modular design makes network planning easy, and allows greater flexibility by letting you install up to 48 Gigabit Ethernet ports plus 2 10 Gigabit Ethernet ports.

The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks (ICS-G7800A Series)
- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics (with IM-G7000A-4PoE module)
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output

Specifications

Input/Output Interface

| | |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC |
| Digital Inputs | +13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA |

Ethernet Interface

| | |
|------------------|--|
| 10GbE SFP+ Slots | 2 |
| Slot Combination | 12 slots for 4-port interface modules (10/100/1000BaseT(X), or PoE+ 10/100/1000BaseT(X), or 100/1000BaseSFP slots) ¹ |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3af/at for PoE/PoE+ output IEEE 802.3ae for 10 Gigabit Ethernet |

Ethernet Software Features

| | |
|----------------------|--|
| Management | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, QinQ VLAN |
| Multicast Routing | DVMRP, PIM-DM, PIM-SM, PIM-SSM |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON |
| Routing Redundancy | VRRP |
| Security | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+ |
| Time Management | NTP Server/Client, SNTP |
| Unicast Routing | OSPF, RIPv1/V2, Static Route |
| Industrial Protocols | EtherNet/IP, Modbus TCP |
| MIB | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB |

Switch Properties

| | |
|--------------------|---------------|
| DRAM | 128 MB |
| Flash | 16 MB |
| IGMP Groups | 4096 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| Packet Buffer Size | 12 Mbits |
| VLAN ID Range | VID 1 to 4094 |
| Priority Queues | 8 |

1. See the IM-G7000A datasheet for Gigabit Ethernet module product information.

| USB Interface | |
|--|--|
| Storage Port | USB Type A |
| Serial Interface | |
| Console Port | USB-serial console (Type B connector) |
| Power Parameters | |
| Input Voltage | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | 0.94/0.55 A @ 110/220 VAC |
| Physical Characteristics | |
| IP Rating | IP30 |
| Dimensions | 440 x 176 x 523.8 mm (17.32 x 6.93 x 20.62 in) |
| Weight | 12900 g (28.5 lb) |
| Installation | Rack mounting |
| Environmental Limits | |
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |
| Standards and Certifications | |
| EMC | EN 55032/24 |
| Safety | EN 60950-1, UL 60950-1 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |
| MTBF | |
| Time | 282,329 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents


| | |
|------------------|--|
| Device | 1 x ICS-G7850A Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 2 x rack-mounting ear 6 x cap, plastic, for SFP slot |
| Power Supply | 1 x power cord, EU type 1 x power cord, US type |
| Documentation | 1 x document and software CD 1 x warranty card |
| Note | 48 V external power supply, SFP modules and/or modules from the IM-G7000A Module Series need to be purchased separately for use with this product. |

Dimensions


Unit: mm (inch)

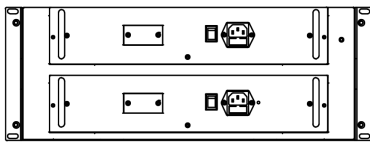


Rear View

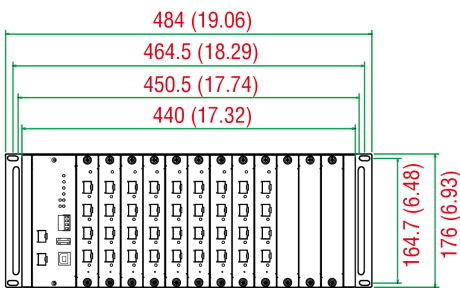

Front View

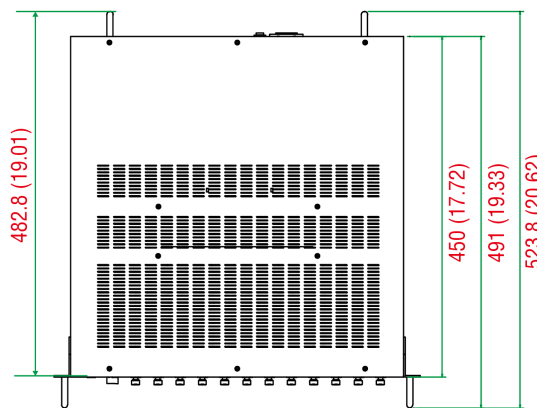

Top View

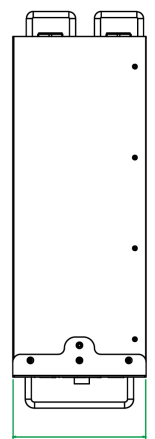

Side View

Ordering Information

| Model Name | Layer | 10GbE SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|----------------------|-------|------------------|------------------------|--|-----------------|
| ICS-G7850A-2XG-HV-HV | 3 | 2 | Up to 48 | Up to 48 | -10 to 60°C |

Accessories (sold separately)

IM-G7000A Module Series

| | |
|-----------------|--|
| IM-G7000A-4GSFP | Gigabit Ethernet interface module with 4 100/1000BaseSFP slots, -10 to 60°C operating temperature |
| IM-G7000A-4GTX | Gigabit Ethernet interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |
| IM-G7000A-4PoE | Gigabit Ethernet PoE+ interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |

Power Supplies

| | |
|---------------|--|
| PWR-G7000A-AC | 85 to 264 VAC power supply module for the ICS-G7748A/G7750A/G7752A/G7848A/G7850A/G7852A Series |
|---------------|--|

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |

| | |
|----------------|---|
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-10GERLC | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-10GLRLC | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-10GSRLC | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Cords

| | |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m |
| PWC-C7AU-2B-183 | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m |
| PWC-C7EU-2B-183 | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183 | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m |
| PWC-C7US-2B-183 | Power cord with United States (US) plug, 10A/125V, 1.83 m |

Software

| | |
|-------------------|--|
| MXview-50 | Industrial network management software with a license for 50 nodes (by IP address) |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |
| MXview-2000 | Industrial network management software with a license for 2000 nodes (by IP address) |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

Storage Kits

| | |
|--------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jun 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

ICS-G7852A Series


48G+4 10GbE-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Up to 48 Gigabit Ethernet ports plus 4 10G Ethernet ports
- Up to 52 optical fiber connections (SFP slots)
- Up to 48 PoE+ ports with external power supply (with IM-G7000A-4PoE module)
- Fanless, -10 to 60°C operating temperature range
- Modular design for maximum flexibility and hassle-free future expansion
- Hot-swappable interface and power modules for continuous operation
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The ICS-G7852A Series full Gigabit backbone switches' modular design makes network planning easy, and allows greater flexibility by letting you install up to 48 Gigabit Ethernet ports plus 4 10 Gigabit Ethernet ports.

The ICS-G7852A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The fanless switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks (ICS-G7800A Series)
- Advanced PoE management functions: PoE output setting, PD failure check, PoE scheduling, and PoE diagnostics (with IM-G7000A-4PoE module)
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP and Modbus TCP protocols for device management and monitoring
- Compatible with PROFINET protocol for transparent data transmission
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output

Specifications

Input/Output Interface

| | |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC |
| Digital Inputs | +13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA |

Ethernet Interface

| | |
|------------------|--|
| 10GbE SFP+ Slots | 4 |
| Slot Combination | 12 slots for 4-port interface modules (10/100/1000BaseT(X), or PoE+ 10/100/1000BaseT(X), or 100/1000BaseSFP slots) ¹ |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3af/at for PoE/PoE+ output IEEE 802.3ae for 10 Gigabit Ethernet |

Ethernet Software Features

| | |
|----------------------|--|
| Management | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, QinQ VLAN |
| Multicast Routing | DVMRP, PIM-DM, PIM-SM, PIM-SSM |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON |
| Routing Redundancy | VRRP |
| Security | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+ |
| Time Management | NTP Server/Client, SNTP |
| Unicast Routing | OSPF, RIPV1/V2, Static Route |
| Industrial Protocols | EtherNet/IP, Modbus TCP |
| MIB | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB |

Switch Properties

| | |
|------------------|--------|
| DRAM | 128 MB |
| Flash | 16 MB |
| IGMP Groups | 4096 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |

1. See the IM-G7000A datasheet for Gigabit Ethernet module product information.

| | |
|--|--|
| Max. No. of VLANs | 256 |
| Packet Buffer Size | 12 Mbits |
| VLAN ID Range | VID 1 to 4094 |
| Priority Queues | 8 |
| USB Interface | |
| Storage Port | USB Type A |
| Serial Interface | |
| Console Port | USB-serial console (Type B connector) |
| Power Parameters | |
| Input Voltage | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | 1.01/0.58 A @ 110/220 VAC |
| Physical Characteristics | |
| IP Rating | IP30 |
| Dimensions | 440 x 176 x 523.8 mm (17.32 x 6.93 x 20.62 in) |
| Weight | 12,900 g (28.5 lb) |
| Installation | Rack mounting |
| Environmental Limits | |
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |
| Standards and Certifications | |
| Safety | EN 60950-1, UL 60950-1 |
| EMC | EN 55032/24 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |

MTBF

| | |
|-----------|--------------------------|
| Time | 274,488 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents


| | |
|------------------|--|
| Device | 1 x ICS-G7852A Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 2 x rack-mounting ear 8 x cap, plastic, for SFP slot |
| Power Supply | 1 x power cord, EU type 1 x power cord, US type |
| Documentation | 1 x document and software CD 1 x warranty card |
| Note | 48 V external power supply, SFP modules and/or modules from the IM-G7000A Module Series need to be purchased separately for use with this product. |

Dimensions


Unit: mm (inch)

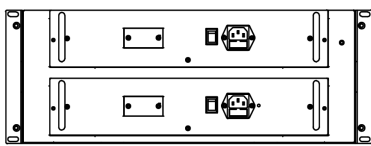


Rear View

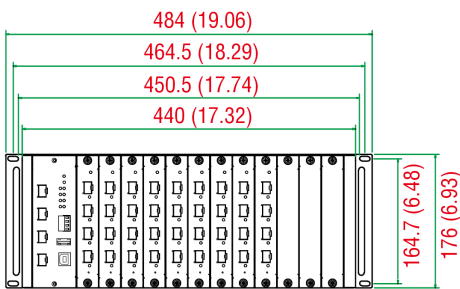

Front View

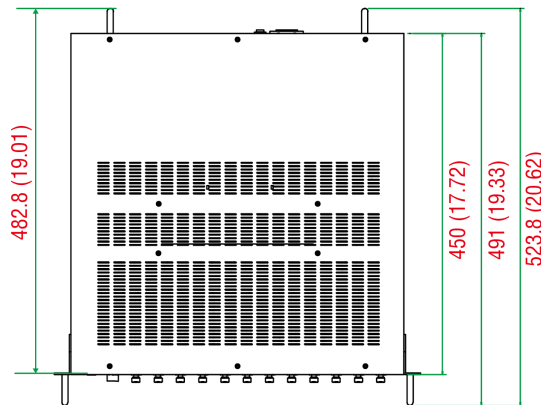

Top View

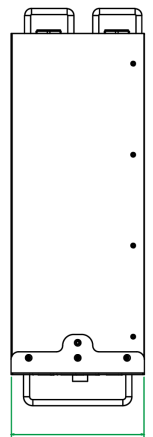

Side View

Ordering Information

| Model Name | Layer | 10GbE SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|----------------------|-------|------------------|------------------------|--|-----------------|
| ICS-G7852A-4XG-HV-HV | 3 | 4 | Up to 48 | Up to 48 | -10 to 60°C |

Accessories (sold separately)

IM-G7000A Module Series

| | |
|-----------------|--|
| IM-G7000A-4GSFP | Gigabit Ethernet interface module with 4 100/1000BaseSFP slots, -10 to 60°C operating temperature |
| IM-G7000A-4GTX | Gigabit Ethernet interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |
| IM-G7000A-4PoE | Gigabit Ethernet PoE+ interface module with 4 10/100/1000BaseT(X) ports, -10 to 60°C operating temperature |

Power Supplies

| | |
|---------------|--|
| PWR-G7000A-AC | 85 to 264 VAC power supply module for the ICS-G7748A/G7750A/G7752A/G7848A/G7850A/G7852A Series |
|---------------|--|

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |

| | |
|----------------|---|
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-10GERLC | SFP+ module with 1 10GBase-ER port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-10GLRLC | SFP+ module with 1 10GBase-LR port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-10GSRLC | SFP+ module with 1 10GBase-SR port with LC connector for 33 m transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Cords

| | |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m |
| PWC-C7AU-2B-183 | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m |
| PWC-C7EU-2B-183 | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183 | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m |
| PWC-C7US-2B-183 | Power cord with United States (US) plug, 10A/125V, 1.83 m |

Software

| | |
|-------------------|--|
| MXview-50 | Industrial network management software with a license for 50 nodes (by IP address) |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |
| MXview-2000 | Industrial network management software with a license for 2000 nodes (by IP address) |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

Storage Kits

| | |
|--------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Jun 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

IKS-G6824A Series

24G-port Layer 3 full Gigabit managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- 24 Gigabit Ethernet ports
- Up to 24 optical fiber connections (SFP slots)
- Fanless, -40 to 75°C operating temperature range (T models)
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), and STP/RSTP/MSTP for network redundancy
- Isolated redundant power inputs with universal 110/220 VAC power supply range
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The IKS-G6824A Series is equipped with 24 Gigabit Ethernet ports, and support Layer 3 routing functionality to facilitate the deployment of applications across networks, making them ideal for large-scale industrial networks.

The IKS-G6824A's full Gigabit capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy technologies, and are fanless and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Redundant, dual AC power inputs
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Digital inputs for integrating sensors and alarms with IP networks

Specifications

Input/Output Interface

| | |
|------------------------|---|
| Alarm Contact Channels | Relay output with current carrying capacity of 2 A @ 30 VDC |
| Digital Inputs | +13 to +30 V for state 1 -30 to +1 V for state 0 Max. input current: 8 mA |

Ethernet Interface

| | |
|---|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | IKS-G6824A-4GTXSFP-HV-HV Series: 20 IKS-G6824A-8GSFP-4GTXSFP-HV-HV Series: 12 |
| 100/1000BaseSFP Ports | IKS-G6824A-8GSFP-4GTXSFP-HV-HV Series: 8 IKS-G6824A-20GSFP-4GTXSFP-HV-HV Series: 20 |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4 |
| Standards | IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX |

Ethernet Software Features

| | |
|----------------------|--|
| Management | ARP, Back Pressure Flow Control, BOOTP, DDM, DHCP Option 66/67/82, DHCP Server/Client, IPv4, LLDP, Port Mirror, RMON, SNMP Inform, SNMPv1/v2c/v3, Syslog, Telnet, TFTP, SMTP, RARP, Flow control |
| Filter | 802.1Q, GMRP, GVRP, IGMP v1/v2/v3, QinQ VLAN |
| Multicast Routing | DVMRP, PIM-DM, PIM-SM, PIM-SSM |
| Redundancy Protocols | Link Aggregation, MSTP, RSTP, Turbo Chain, Turbo Ring v1/v2, V-ON |
| Routing Redundancy | VRRP |
| Security | Access control list, Broadcast storm protection, HTTPS/SSL, MAB authentication, Sticky MAC, NTP authentication, Port Lock, RADIUS, SSH, TACACS+ |
| Time Management | NTP Server/Client, SNTP |
| Unicast Routing | OSPF, RIPV1/V2, Static Route |
| Industrial Protocols | EtherNet/IP, Modbus TCP, PROFINET |
| MIB | Bridge MIB, Ethernet-like MIB, MIB-II, P-BRIDGE MIB, Q-BRIDGE MIB, RMON MIB Groups 1, 2, 3, 9, RSTP MIB |

Switch Properties

| | |
|--------------------|---------------|
| DRAM | 128 MB |
| Flash | 16 MB |
| IGMP Groups | 4096 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| Packet Buffer Size | 12 Mbits |
| VLAN ID Range | VID 1 to 4094 |
| Priority Queues | 8 |

| | |
|--|--|
| USB Interface | |
| Storage Port | USB Type A |
| Serial Interface | |
| Console Port | USB-serial console (Type B connector) |
| Power Parameters | |
| Input Voltage | 110 to 220 VAC, Redundant dual inputs |
| Operating Voltage | 85 to 264 VAC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | 0.67/0.38 A @ 110/220 VAC |
| Physical Characteristics | |
| IP Rating | IP30 |
| Dimensions | 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in) |
| Weight | 5100 g (11.25 lb) |
| Installation | Rack mounting |
| Environmental Limits | |
| Operating Temperature | Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 75°C (-40 to 167°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |
| Standards and Certifications | |
| Safety | EN 60950-1, UL 60950-1 |
| EMC | EN 55032/24 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |
| MTBF | |
| Time | 460,854 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty


| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents

| | |
|------------------|--|
| Device | 1 x IKS-G6824A Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 2 x rack-mounting ear 8 x cap, plastic, for SFP slot (IKS-G6824A-4GTXSFP-HV-HV Series) 16 x cap, plastic, for SFP slot (IKS-G6824A-8GSFP-4GTXSFP-HV-HV Series) 28 x cap, plastic, for SFP slot (IKS-G6824A-20GSFP-4GTXSFP-HV-HV Series) |
| Power Supply | 1 x power cord, EU type 1 x power cord, US type |
| Documentation | 1 x document and software CD 1 x warranty card |
| Note | SFP modules need to be purchased separately for use with this product. |

Dimensions

Unit: mm (inch)

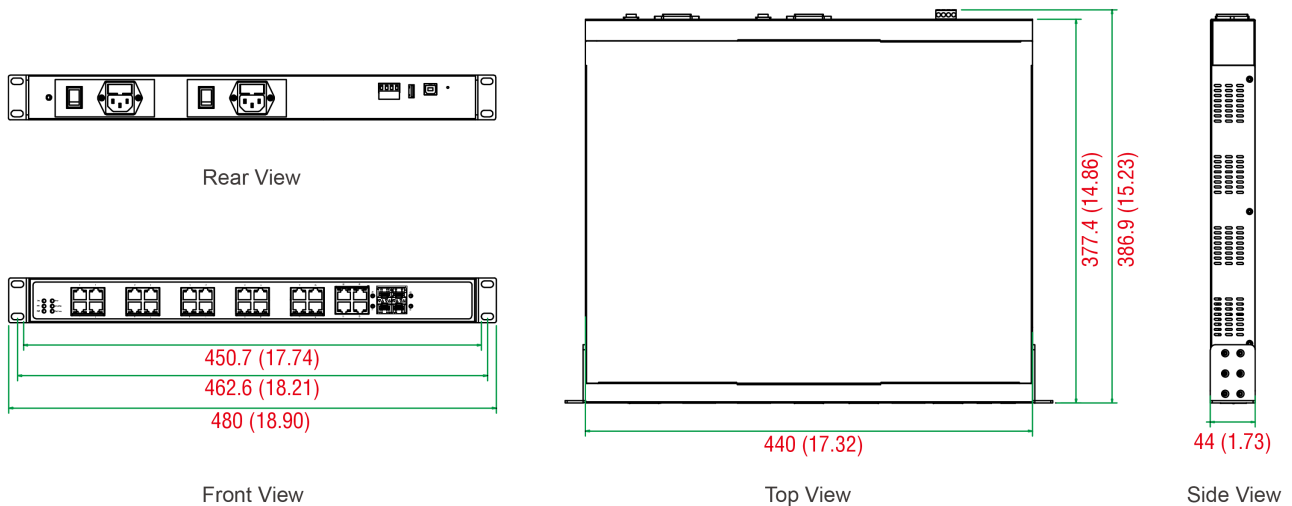

Ordering Information

| Model Name | Layer | Combo Ports 10/100/1000BaseT(X) or 100/1000BaseSFP+ | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-----------------------------------|-------|---|---------------------------|--|-----------------|
| IKS-G6824A-4GTXSFP-HV-HV | 3 | 4 | 0 | 20 | -10 to 60°C |
| IKS-G6824A-8GSFP-4GTXSFP-HV-HV | 3 | 4 | 8 | 12 | -10 to 60°C |
| IKS-G6824A-20GSFP-4GTXSFP-HV-HV | 3 | 4 | 20 | 0 | -10 to 60°C |
| IKS-G6824A-4GTXSFP-HV-HV-T | 3 | 4 | 0 | 20 | -40 to 75°C |
| IKS-G6824A-8GSFP-4GTXSFP-HV-HV-T | 3 | 4 | 8 | 12 | -40 to 75°C |
| IKS-G6824A-20GSFP-4GTXSFP-HV-HV-T | 3 | 4 | 20 | 0 | -40 to 75°C |

Accessories (sold separately)

Storage Kits

| | |
|------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
|------------|---|

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Cords

| | |
|------------------|---|
| PWC-C13AU-3B-183 | Power cord with Australian (AU) plug, 1.83 m |
| PWC-C13CN-3B-183 | Power cord with three-prong China (CN) plug, 1.83 m |
| PWC-C13EU-3B-183 | Power cord with Continental Europe (EU) plug, 1.83 m |
| PWC-C13UK-3B-183 | Power cord with United Kingdom (UK) plug, 1.83 m |
| PWC-C13US-3B-183 | Power cord with United States (US) plug, 1.83 m |
| PWC-C7AU-2B-183 | Power cord with Australian (AU) plug, 2.5A/250V, 1.83 m |
| PWC-C7EU-2B-183 | Power cord with Continental Europe (EU) plug, 2.5A/250V, 1.83 m |
| PWC-C7UK-2B-183 | Power cord with United Kingdom (UK) plug, 2.5A/250V, 1.83 m |
| PWC-C7US-2B-183 | Power cord with United States (US) plug, 10A/125V, 1.83 m |

Software


| | |
|-------------------|--|
| MXview-50 | Industrial network management software with a license for 50 nodes (by IP address) |
| MXview-100 | Industrial network management software with a license for 100 nodes (by IP address) |
| MXview-250 | Industrial network management software with a license for 250 nodes (by IP address) |
| MXview-500 | Industrial network management software with a license for 500 nodes (by IP address) |
| MXview-1000 | Industrial network management software with a license for 1000 nodes (by IP address) |
| MXview-2000 | Industrial network management software with a license for 2000 nodes (by IP address) |
| MXview Upgrade-50 | License expansion of MXview industrial network management software by 50 nodes (by IP address) |

© Moxa Inc. All rights reserved. Updated Aug 06, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

IM-G7000A Module Series

4G-port Gigabit Ethernet interface modules for ICS-G7700A/G7800A modular managed Ethernet switches

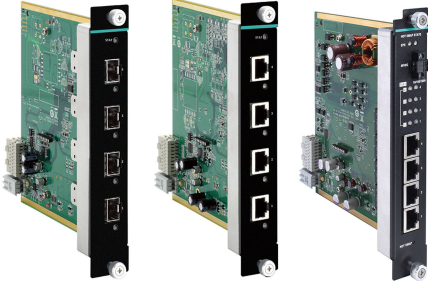

Features and Benefits

- Full Gigabit Ethernet ports
- IEEE 802.3af/at, PoE+ standards (PoE model)

Introduction

The IM-G7000A Module Series includes 4G-port Ethernet interface modules designed for ICS-G7748A, ICS-G7750A, ICS-G7752A, ICS-G7848A, ICS-G7850A, and ICS-G7852A modular managed switches. In particular, the IM-G7000A-4PoEA module is a PoE-enabled interface module that centralizes the power supply and provides up to 36 watts of power per port, reducing the effort required to provide power to connected devices.

Specifications

Ethernet Interface

| | |
|---|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | IM-G7000A-4GTX: 4 IM-G7000A-4GTX: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection |
| 100/1000BaseSFP Ports | IM-G7000A-4GSFP: 4 |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector) | IM-G7000A-4PoE: 4, Compliant with IEEE 802.3af/at high power mode up to 36 W IM-G7000A-4PoE: Auto negotiation speed |

LED Interface

| | |
|----------------|---|
| LED Indicators | State, Hot-swap, 10/100/1000 for TP port, 100/1000 for fiber port, PoE and EPS for PoE module |
|----------------|---|

Power Parameters

| | |
|-------------------|--|
| Power Consumption | IM-G7000A-4GSFP: 1.32 W (max.) IM-G7000A-4GTX: 3.47 W (max.) IM-G7000A-4PoE: 5.14 W (max.) |
|-------------------|--|

Physical Characteristics


| | |
|------------|---|
| Dimensions | 28.8 x 174.7 x 166.8 mm (1.13 x 6.88 x 6.57 in) |
| Weight | 220 g (0.49 lb) |

MTBF

| | |
|-------------------------|--|
| Time | IM-G7000A-4GTX: 1,569,520 hrs IM-G7000A-4GSFP: 1,544,084 hrs IM-G7000A-4PoE: 394,348 hrs |
| Standards | Telcordia (Bellcore), GB |
| Warranty | |
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |
| Package Contents | |
| Device | 1 x IM-G7000A Series module |
| Documentation | 1 x warranty card |

Dimensions

Unit: mm (inch)

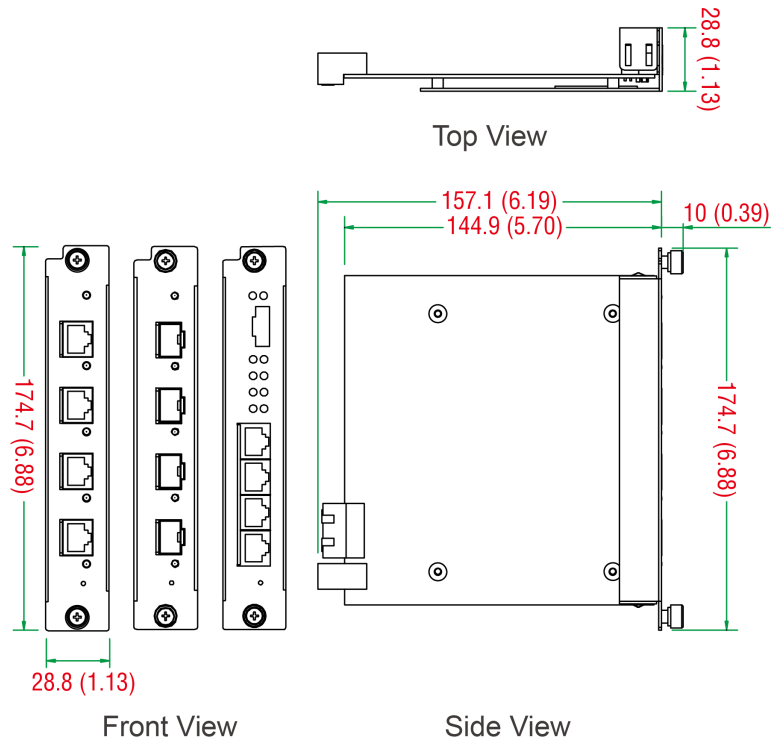

Ordering Information

| Model Name | 10/100/1000BaseT(X) Ports RJ45 Connector | 100/1000Base SFP Slots | PoE Ports 10/100/1000BaseT(X), RJ45 Connector | Operating Temp. |
|-----------------|---|------------------------|---|-----------------|
| IM-G7000A-4GTX | 4 | - | - | -10 to 60°C |
| IM-G7000A-4GSFP | - | 4 | - | -10 to 60°C |
| IM-G7000A-4PoE | - | - | 4 | -10 to 60°C |

Accessories (sold separately)

SFP Modules

| | |
|-----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXLC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

LM-7000H Module Series

Ethernet and PoE+ modules for PT-G7728/G7828 Series switches



Features and Benefits

- -40 to 85°C wide operating temperature
- IEC 61850-3 and IEEE 1613 compliant

Certifications



Introduction

The LM-7000H Module Series hot-swappable line modules are designed for the PT-G7828 Layer 3 and PT-G7728 Layer 2 IEC 61850-3 Ethernet switches. The line modules allow greater flexibility by letting you to add 4 Gigabit Ethernet ports or PoE ports per module.

Specifications

Ethernet Interface

| | |
|--|-------------------|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | LM-7000H-4GTX: 4 |
| 100/1000BaseSFP Slots | LM-7000H-4GSFP: 4 |
| PoE Ports (100/1000BaseT(X), RJ45 connector) | LM-7000H-4GPoE: 4 |

Power Parameters

| | |
|-------------------|---|
| Power Consumption | LM-7000H-4GTX/4GPoE: 1.98 W (max.) LM-7000H-4GSFP: 1.56 W (max.) |
|-------------------|---|

Physical Characteristics

| | |
|--------|---|
| Weight | LM-7000H-4GTX/4GPoE: 240 g (0.53 lb) LM-7000H-4GSFP: 300 g (0.66 lb) |
|--------|---|

MTBF

| | |
|------|--|
| Time | LM-7000H-4GPoE: 1,280,518 hrs LM-7000H-4GSFP: 2,475,903 hrs LM-7000H-4GTX: 2,641,729 hrs |
|------|--|

Standards

| | |
|--|--------------------------|
| | Telcordia (Bellcore), GB |
|--|--------------------------|

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Ordering Information

| Model Name | 10/100/1000BaseT(X) Ports RJ45 Connector | 100/1000BaseT(X) PoE Ports RJ45 Connector | 100/1000Base SFP Slots |
|----------------|---|--|------------------------|
| LM-7000H-4GTX | 4 | – | – |
| LM-7000H-4GSFP | – | – | 4 |
| LM-7000H-4GPoE | – | 4 | – |

Accessories (sold separately)

SFP Modules

| | |
|-----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSXC port with LC connector for 500 m transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

MDS-G4012-L3-4XGS Series

8 GbE + 4 10GbE-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- Multiple interface type 4-port modules for greater versatility
- Up to 8 Gigabit Ethernet ports or SFP slots plus 4 embedded 10G Ethernet ports
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

Certifications



Introduction

The MDS-G4012-L3-4XGS Series modular switches support 4 10GbE + 8 Gigabit ports, including 4 embedded ports, 2 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4012-L3-4XGS Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45 and SFP) and power units (24/48 VDC and 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4012-L3-4XGS Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4012-L3-4XGS Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual LV or HV power modules provides redundancy for high reliability and availability and also offers flexibility to accommodate the power requirements of different applications.

Support for Layer 3 routing functionality enables these switches to facilitate the deployment of applications across different networks, making them ideal for large-scale industrial networks. In addition, the MDS-G4012-L3-4XGS Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

Specifications

Ethernet Interface

| | |
|-----------------------|---|
| Pre-installed Modules | 4 embedded 10Gigabit ports |
| Module | 2 slots for optional 4-port FE/GE modules |

| | |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48-A, PWR-LV-P48-A only</p> |
| Standards | <p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP |
| Routing Redundancy | VRRP |
| Security | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy, Secure Boot, MAC Authentication Bypass, Access control list |
| Time Management | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |
| Power Substation | MMS |

Switch Properties

| | |
|--------------------|---------------|
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 1024 |
| Priority Queues | 8 |
| Packet Buffer Size | 12 Mbits |

Serial Interface

| | |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

USB Interface

| | |
|---------------|------------|
| USB Connector | USB Type A |
|---------------|------------|

Input/Output Interface

| | |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module) |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC |

Power Parameters

| | |
|--------------------------------|--|
| Input Voltage | With PWR-HV-P48-A installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC With PWR-LV-P48-A installed: 24/48 VDC, PoE: 48 VDC With PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz With PWR-LV-NP installed: 24/48 VDC |
| Operating Voltage | With PWR-HV-P48-A installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC With PWR-LV-P48-A installed: 18 to 72 VDC, PoE: 46 to 57 VDC With PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz With PWR-LV-NP installed: 18 to 72 VDC |
| Input Current | With PWR-HV-P48-A/PWR-HV-NP installed: Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC With PWR-LV-P48-A/PWR-LV-NP installed: Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Max. PoE Power Output per Port | 36 W |
| Total PoE Power Budget | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |

Physical Characteristics

| | |
|--------------|--|
| IP Rating | IP40 |
| Dimensions | 197 x 115 x 163.25 mm (7.76 x 4.53 x 6.43 in) 212 x 115 x 163.25 mm (8.35 x 4.53 x 6.43 in) with dual PWR-HV-P48-A/PWR-LV-P48-A power modules installed |
| Weight | 3,030 g (6.68 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit) |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|------------------|---|
| Safety | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, EN 61010-2-201, UL 61010-2-201 |
| EMC | EN 55032/35, EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-31 |
| Vibration | IEC 60068-2-6 |
| Power Substation | IEC 61850-3, IEEE 1613 |

MTBF

| | |
|-----------|-----------------|
| Time | 794,532 hrs |
| Standards | Telcordia SR332 |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|--|
| Device | 1 x MDS-G4012-L3-4XGS Series switch |
| Installation Kit | Preinstalled, 2 x DIN-rail kit 4 x cap, plastic, for SFP+ slots |

| | |
|---------------|---|
| Documentation | 1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card |
| Note | This product requires additional modules (sold separately) to function. |

Dimensions

Unit: mm (inch)

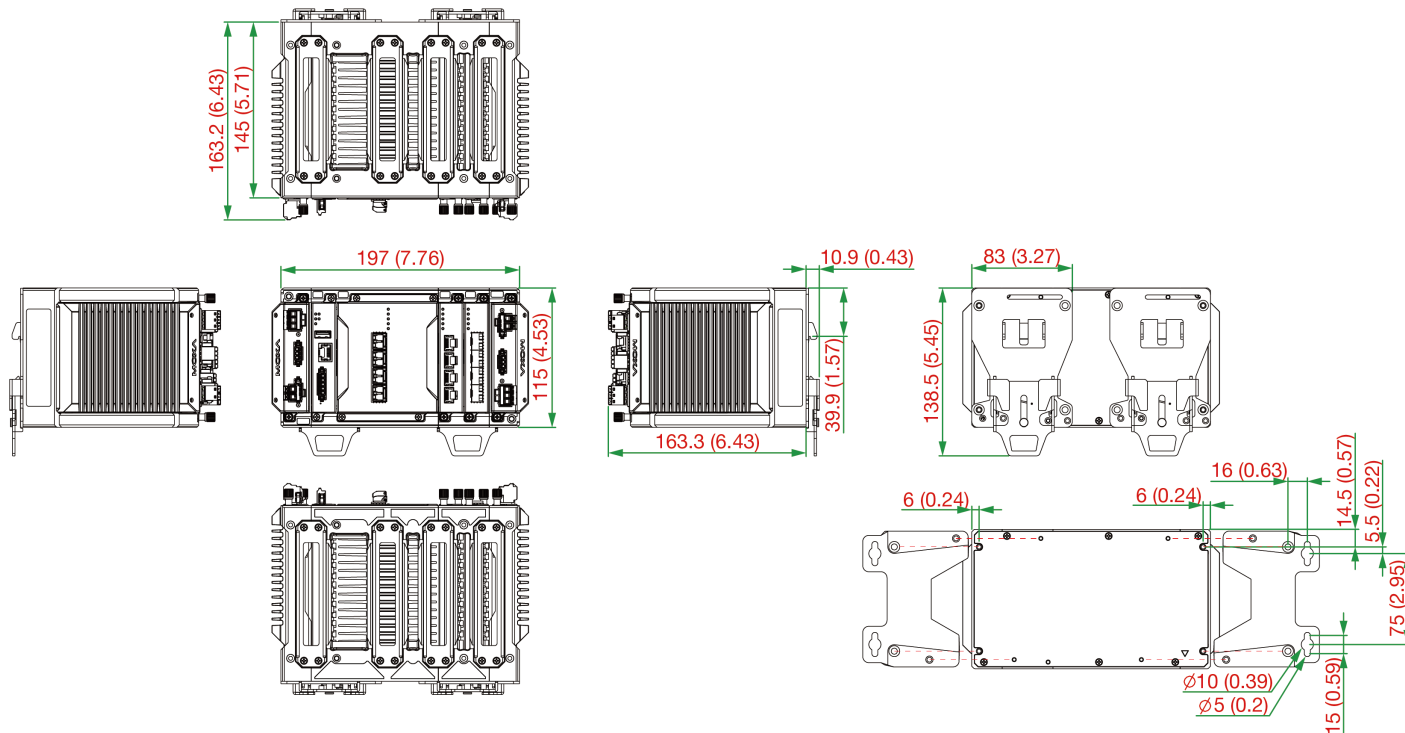

Ordering Information

| Model Name | Layer | Total No. of Ports | 10G SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|---------------------|-------|--------------------|----------------|------------------------|--|-------------------------------------|-----------------|
| MDS-G4012-L3-4XGS-T | 3 | 12 | 4 | Up to 8 | Up to 8 | Up to 8 | -40 to 75°C |

Accessories (sold separately)

LM-7000H Module Series

| | |
|----------------|---|
| LM-7000H-4GTX | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots |
| LM-7000H-4TX | Fast Ethernet module with 4 10/100BaseT(X) ports |
| LM-7000H-4PoE | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports |

Power Modules

| | |
|--------------|---|
| PWR-LV-P48-A | 24/48 VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-HV-P48-A | 110/220 VAC/VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-LV-NP | Power supply module (24/48 VDC) with system power input, relay |
| PWR-HV-NP | Power supply module (110/220 VAC/VDC) with system power input, relay |

Wall-Mounting Kits

| | |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

Rack-Mounting Kits

| | |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

SFP Modules

| | |
|-----------------|--|
| SFP-10GERLC-T | SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-10GLRLC-T | SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-10GSRLC-T | SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature |
| SFP-10GZRLC-T | SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |

| | |
|----------------|---|
| SFP-1GLHXLC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Supplies

| | |
|------------|--|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 08, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

MDS-G4012-L3 Series

12G-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- Multiple interface type 4-port modules for greater versatility
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

Certifications



Introduction

The MDS-G4012-L3 Series modular switches support up to 12 Gigabit ports, including 4 embedded ports, 2 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4000-L3 Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45, SFP, and PoE+) and power units (24/48 VDC, 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4000-L3 Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4000-L3 Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual power modules provides redundancy for high reliability and availability while LV and HV power module options offer additional flexibility to accommodate the power requirements of different applications.

Support for Layer 3 routing functionality enables these switches to facilitate the deployment of applications across different networks, making them ideal for large-scale industrial networks. In addition, the MDS-G4000-L3 Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

Specifications

Ethernet Interface

| | |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports |
| Module | 2 slots for optional 4-port FE/GE modules |

| | |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48, PWR-LV-P48 only</p> |
| Standards | <p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication IEEE 802.3af/at for PoE/PoE+ output</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB, Loopback interface |
| Filter | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation |
| Routing Redundancy | VRRP |
| Security | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy |
| Time Management | SNTP, NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |

Switch Properties

| | |
|--------------------|---------------|
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 1024 |
| Priority Queues | 8 |
| Packet Buffer Size | 12 Mbits |

Serial Interface

| | |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

USB Interface

| | |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

Input/Output Interface

| | |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module) |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC |

Power Parameters

| | |
|--------------------------------|--|
| Input Voltage | with PWR-HV-P48 installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC with PWR-LV-P48 installed: 24/48 VDC, PoE: 48 VDC with PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz with PWR-LV-NP installed: 24/48 VDC |
| Operating Voltage | with PWR-HV-P48 installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC with PWR-LV-P48 installed: 18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location) with PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz with PWR-LV-NP installed: 18 to 72 VDC |
| Input Current | with PWR-HV-P48/PWR-HV-NP installed: Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC with PWR-LV-P48/PWR-LV-NP installed: Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC |
| Max. PoE Power Output per Port | 36 W |
| Total PoE Power Budget | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |

Physical Characteristics

| | |
|--------------|---|
| IP Rating | IP40 |
| Dimensions | 134 x 115 x 163.25 mm (5.28 x 4.53 x 6.44 in) |
| Weight | 2000 g (4.41 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit) |

Environmental Limits

| | |
|--|--|
| Operating Temperature | Standard Temp Models: -10 to 60°C (-14 to 140°F) Wide Temp Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|---------------------|---|
| Safety | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1 |
| EMC | EN 55032/35, EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11: Voltage Dips and Voltage Interruptions |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-31 |
| Vibration | IEC 60068-2-6 |
| Hazardous Locations | Class I Division 2, ATEX |
| Power Substation | IEEE 1613, IEC 61850-3 |

MTBF

| | |
|-----------|-----------------|
| Time | 1,008,160 hrs |
| Standards | Telcordia SR332 |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|---|
| Device | 1 x MDS-G4012-L3 Series switch |
| Cable | 1 x RJ45-to-DB9 console cable |
| Installation Kit | (Pre-installed) 2 x DIN-rail kit 2 x cap, plastic, for RJ45 port |

| | |
|---------------|---|
| Documentation | 1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card |
| Note | This product requires additional modules (sold separately) to function. |

Dimensions

Unit: mm (inch)

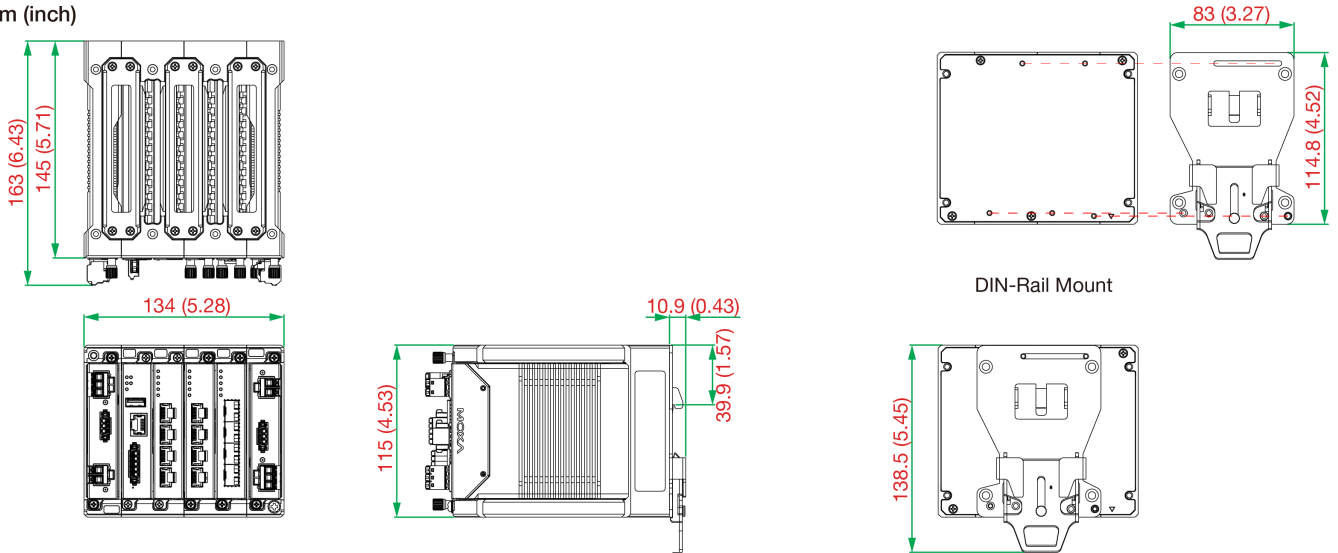

Ordering Information

| Model Name | Layer | Total No. of Ports | 100/1000BaseSFP Slots | 10/100/1000BaseT(X) Ports (RJ45 Connector) | PoE 10/100/1000BaseT(X) Ports (RJ45 Connector) | 10/100BaseT(X) Ports (RJ45 Connector) | PoE 10/100BaseT(X) Ports (RJ45 Connector) | Operating Temp. |
|----------------|-------|--------------------|-----------------------|--|--|---------------------------------------|---|-----------------|
| MDS-G4012-L3 | 3 | 12 | Up to 8 | Up to 12 | Up to 8 | Up to 8 | Up to 8 | -10 to 60°C |
| MDS-G4012-L3-T | 3 | 12 | Up to 8 | Up to 12 | Up to 8 | Up to 8 | Up to 8 | -40 to 75°C |

Accessories (sold separately)

LM-7000H Module Series

| | |
|----------------|---|
| LM-7000H-4GTX | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots |
| LM-7000H-4TX | Fast Ethernet module with 4 10/100BaseT(X) ports |
| LM-7000H-4PoE | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports |

Power Modules

| | |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP | Power supply module (24/48 VDC) with system power input, relay |
| PWR-HV-NP | Power supply module (110/220 VAC/VDC) with system power input, relay |

Wall-Mounting Kits

| | |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

Rack-Mounting Kits

| | |
|--------------------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
| SFP Modules | |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXLC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |

| | |
|-----------------|--|
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Supplies

| | |
|------------|--|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 25, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

MDS-G4020-L3-4XGS Series

16 GbE + 4 10GbE-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- Multiple interface type 4-port modules for greater versatility
- Up to 16 Gigabit Ethernet ports or SFP slots plus 4 embedded 10G Ethernet ports
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

Certifications



Introduction

The MDS-G4020-L3-4XGS Series modular switches support 4 10GbE + 16 Gigabit ports, including 4 embedded ports, 4 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4020-L3-4XGS Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45 and SFP) and power units (24/48 VDC and 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4020-L3-4XGS Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4020-L3-4XGS Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual LV or HV power modules provides redundancy for high reliability and availability and also offers flexibility to accommodate the power requirements of different applications.

Support for Layer 3 routing functionality enables these switches to facilitate the deployment of applications across different networks, making them ideal for large-scale industrial networks. In addition, the MDS-G4020-L3-4XGS Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

Specifications

Ethernet Interface

| | |
|-----------------------|---|
| Pre-installed Modules | 4 embedded 10Gigabit ports |
| Module | 4 slots for optional 4-port FE/GE modules |

| | |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48-A, PWR-LV-P48-A only</p> |
| Standards | <p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP |
| Routing Redundancy | VRRP |
| Security | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy, Secure Boot, MAC Authentication Bypass, Access control list |
| Time Management | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |
| Power Substation | MMS |

Switch Properties

| | |
|--------------------|---------------|
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 1024 |
| Priority Queues | 8 |
| Packet Buffer Size | 12 Mbits |

Serial Interface

| | |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

USB Interface

| | |
|---------------|------------|
| USB Connector | USB Type A |
|---------------|------------|

Input/Output Interface

| | |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module) |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC |

Power Parameters

| | |
|--------------------------------|--|
| Input Voltage | With PWR-HV-P48-A installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC With PWR-LV-P48-A installed: 24/48 VDC, PoE: 48 VDC With PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz With PWR-LV-NP installed: 24/48 VDC |
| Operating Voltage | With PWR-HV-P48-A installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC With PWR-LV-P48-A installed: 18 to 72 VDC, PoE: 46 to 57 VDC With PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz With PWR-LV-NP installed: 18 to 72 VDC |
| Input Current | With PWR-HV-P48-A/PWR-HV-NP installed: Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC With PWR-LV-P48-A/PWR-LV-NP installed: Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Max. PoE Power Output per Port | 36 W |
| Total PoE Power Budget | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |

Physical Characteristics

| | |
|--------------|--|
| IP Rating | IP40 |
| Dimensions | 239 x 115 x 163.25 mm (9.41 x 4.53 x 6.43 in) 254 x 115 x 163.25 mm (10 x 4.53 x 6.43 in) with dual PWR-HV-P48-A/PWR-LV-P48-A power modules installed |
| Weight | 3,400 g (7.50 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit) |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|------------------|---|
| Safety | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, UL 61010-2-201, EN 61010-2-201 |
| EMC | EN 55032/35, EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-31 |
| Vibration | IEC 60068-2-6 |
| Power Substation | IEC 61850-3, IEEE 1613 |

MTBF

| | |
|-----------|-----------------|
| Time | 794,302 hrs |
| Standards | Telcordia SR332 |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|--|
| Device | 1 x MDS-G4020-L3-4XGS Series switch |
| Installation Kit | Preinstalled, 2 x DIN-rail kit 4 x cap, plastic, for SFP+ slots |

| | |
|---------------|---|
| Documentation | 1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card |
| Note | This product requires additional modules (sold separately) to function. |

Dimensions

Unit: mm (inch)

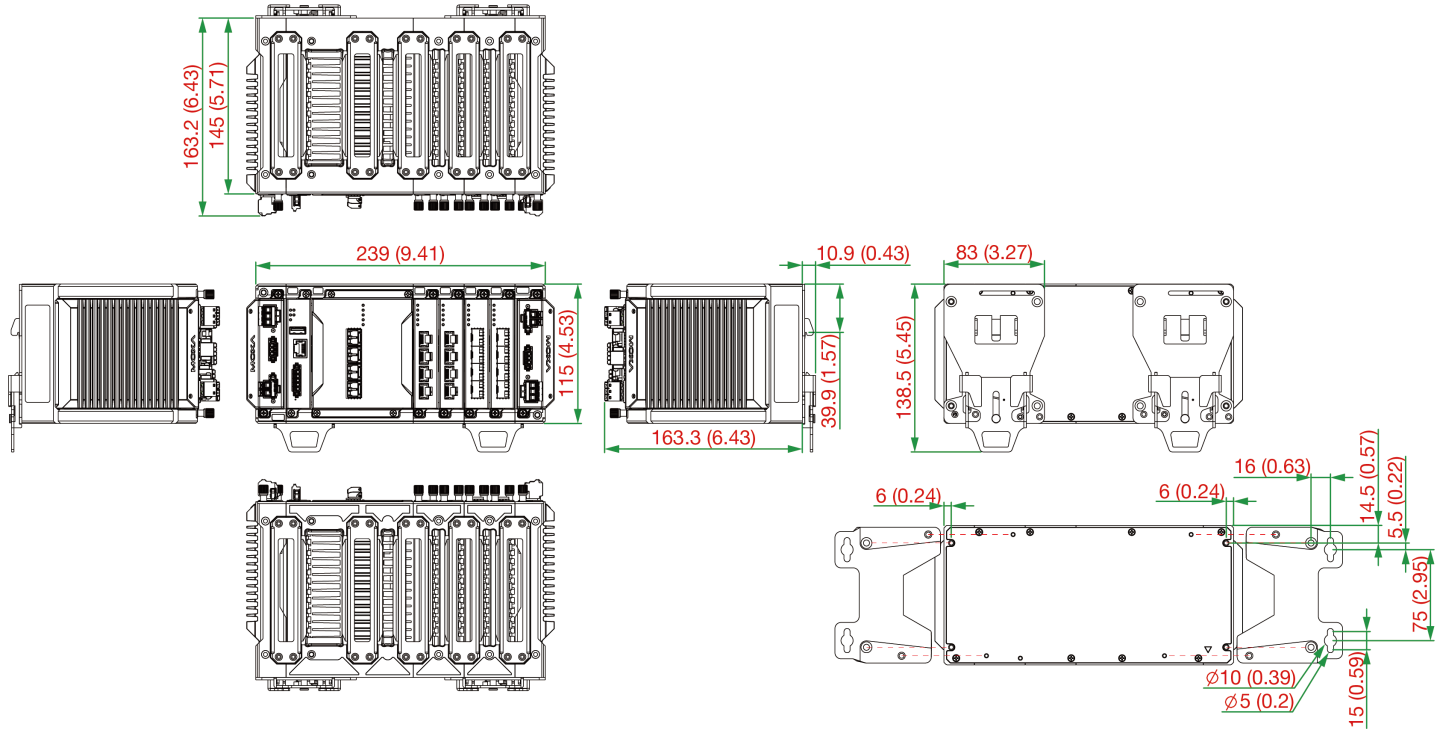

Ordering Information

| Model Name | Layer | Total No. of Ports | 10G SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|---------------------|-------|--------------------|----------------|------------------------|--|-------------------------------------|-----------------|
| MDS-G4020-L3-4XGS-T | 3 | 20 | 4 | Up to 16 | Up to 16 | Up to 16 | -40 to 75°C |

Accessories (sold separately)

LM-7000H Module Series

| | |
|----------------|---|
| LM-7000H-4GTX | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots |
| LM-7000H-4TX | Fast Ethernet module with 4 10/100BaseT(X) ports |
| LM-7000H-4PoE | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports |

Power Modules

| | |
|--------------|---|
| PWR-LV-P48-A | 24/48 VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-HV-P48-A | 110/220 VAC/VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-LV-NP | Power supply module (24/48 VDC) with system power input, relay |
| PWR-HV-NP | Power supply module (110/220 VAC/VDC) with system power input, relay |

Wall-Mounting Kits

| | |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

Rack-Mounting Kits

| | |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

SFP Modules

| | |
|----------------|--|
| SFP-10GERLC-T | SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-10GLRLC-T | SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-10GSRLC-T | SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature |
| SFP-10GZRLC-T | SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |

| | |
|----------------|---|
| SFP-1GLHXLC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Supplies

| | |
|------------|--|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 08, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

MDS-G4020-L3 Series

20G-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- Multiple interface type 4-port modules for greater versatility
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

Certifications



Introduction

The MDS-G4020-L3 Series modular switches support up to 20 Gigabit ports, including 4 embedded ports, 4 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4000-L3 Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45, SFP, and PoE+) and power units (24/48 VDC, 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4000-L3 Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4000 Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual power modules provides redundancy for high reliability and availability while LV and HV power module options offer additional flexibility to accommodate the power requirements of different applications.

Support for Layer 3 routing functionality enables these switches to facilitate the deployment of applications across different networks, making them ideal for large-scale industrial networks. In addition, the MDS-G4000-L3 Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

Specifications

Ethernet Interface

| | |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports |
| Module | 4 slots for optional 4-port FE/GE modules |

| | |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48, PWR-LV-P48 only</p> |
| Standards | <p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication IEEE 802.3af/at for PoE/PoE+ output</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB, Loopback interface |
| Filter | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation |
| Routing Redundancy | VRRP |
| Security | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy |
| Time Management | SNTP, NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |

Switch Properties

| | |
|--------------------|---------------|
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 1024 |
| Priority Queues | 8 |
| Packet Buffer Size | 12 Mbits |

Serial Interface

| | |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

USB Interface

| | |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

Input/Output Interface

| | |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module) |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC |

Power Parameters

| | |
|--------------------------------|--|
| Input Voltage | with PWR-HV-P48 installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC with PWR-LV-P48 installed: 24/48 VDC, PoE: 48 VDC with PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz with PWR-LV-NP installed: 24/48 VDC |
| Operating Voltage | with PWR-HV-P48 installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC with PWR-LV-P48 installed: 18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location) with PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz with PWR-LV-NP installed: 18 to 72 VDC |
| Input Current | with PWR-HV-P48/PWR-HV-NP installed: Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC with PWR-LV-P48/PWR-LV-NP installed: Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC |
| Max. PoE Power Output per Port | 36 W |
| Total PoE Power Budget | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |

Physical Characteristics

| | |
|--------------|---|
| IP Rating | IP40 |
| Dimensions | 176 x 115 x 163.25 mm (6.93 x 4.53 x 6.44 in) |
| Weight | 2500 g (5.51 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit) |

Environmental Limits

| | |
|--|--|
| Operating Temperature | Standard Temp Models: -10 to 60°C (-14 to 140°F) Wide Temp Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|---------------------|---|
| Safety | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1 |
| EMC | EN 55032/35, EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11: Voltage Dips and Voltage Interruptions |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-31 |
| Vibration | IEC 60068-2-6 |
| Hazardous Locations | Class I Division 2, ATEX |
| Power Substation | IEEE 1613, IEC 61850-3 |

MTBF

| | |
|-----------|-----------------|
| Time | 1,007,790 hrs |
| Standards | Telcordia SR332 |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|---|
| Device | 1 x MDS-G4020-L3 Series switch |
| Cable | 1 x RJ45-to-DB9 console cable |
| Installation Kit | (Pre-installed) 2 x DIN-rail kit 2 x cap, plastic, for RJ45 port |

| | |
|---------------|---|
| Documentation | 1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card |
| Note | This product requires additional modules (sold separately) to function. |

Dimensions

Unit: mm (inch)

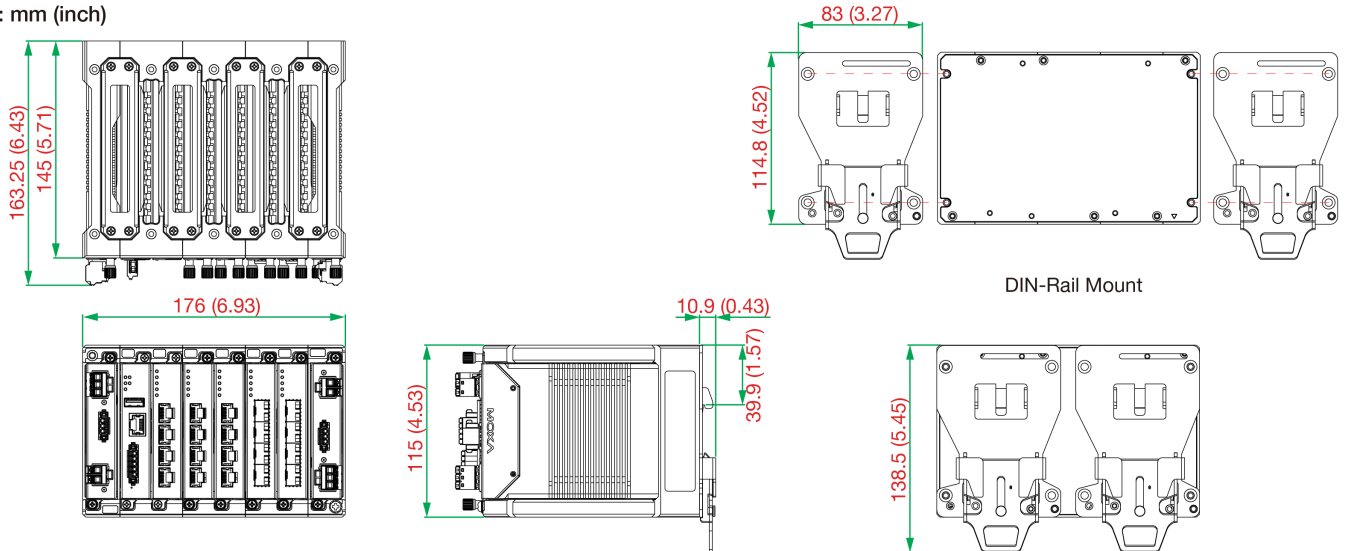

Ordering Information

| Model Name | Layer | Total No. of Ports | 100/1000BaseSFP Slots | 10/100/1000BaseT(X) Ports (RJ45 Connector) | PoE 10/100/1000BaseT(X) Ports (RJ45 Connector) | 10/100BaseT(X) Ports (RJ45 Connector) | PoE 10/100BaseT(X) Ports (RJ45 Connector) | Operating Temp. |
|----------------|-------|--------------------|-----------------------|--|--|---------------------------------------|---|-----------------|
| MDS-G4020-L3 | 3 | 20 | Up to 16 | Up to 20 | Up to 16 | Up to 16 | Up to 16 | -10 to 60°C |
| MDS-G4020-L3-T | 3 | 20 | Up to 16 | Up to 20 | Up to 16 | Up to 16 | Up to 16 | -40 to 75°C |

Accessories (sold separately)

LM-7000H Module Series

| | |
|----------------|---|
| LM-7000H-4GTX | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots |
| LM-7000H-4TX | Fast Ethernet module with 4 10/100BaseT(X) ports |
| LM-7000H-4PoE | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports |

Power Modules

| | |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP | Power supply module (24/48 VDC) with system power input, relay |
| PWR-HV-NP | Power supply module (110/220 VAC/VDC) with system power input, relay |

Wall-Mounting Kits

| | |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

Rack-Mounting Kits

| | |
|--------------------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
| SFP Modules | |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXLC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |

| | |
|-----------------|--|
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Supplies

| | |
|------------|--|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 25, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

MDS-G4028-L3-4XGS Series

24 GbE + 4 10GbE-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- Multiple interface type 4-port modules for greater versatility
- Up to 24 Gigabit Ethernet ports or SFP slots plus 4 embedded 10G Ethernet ports
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Passive backplane to minimize maintenance efforts
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

Certifications



Introduction

The MDS-G4028-L3-4XGS Series modular switches support 4 10GbE + 24 Gigabit ports, including 4 embedded ports, 6 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4028-L3-4XGS Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45 and SFP) and power units (24/48 VDC and 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4028-L3-4XGS Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4028-L3-4XGS Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual LV or HV power modules provides redundancy for high reliability and availability and also offers flexibility to accommodate the power requirements of different applications.

Support for Layer 3 routing functionality enables these switches to facilitate the deployment of applications across different networks, making them ideal for large-scale industrial networks. In addition, the MDS-G4028-L3-4XGS Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

Specifications

Ethernet Interface

| | |
|-----------------------|---|
| Pre-installed Modules | 4 embedded 10Gigabit ports |
| Module | 6 slots for optional 4-port FE/GE modules |

| | |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48-A, PWR-LV-P48-A only</p> |
| Standards | <p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP |
| Routing Redundancy | VRRP |
| Security | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy, Secure Boot, MAC Authentication Bypass, Access control list |
| Time Management | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |
| Power Substation | MMS |

Switch Properties

| | |
|--------------------|---------------|
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 1024 |
| Priority Queues | 8 |
| Packet Buffer Size | 12 Mbits |

Serial Interface

| | |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

USB Interface

| | |
|---------------|------------|
| USB Connector | USB Type A |
|---------------|------------|

Input/Output Interface

| | |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module) |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC |

Power Parameters

| | |
|--------------------------------|--|
| Input Voltage | With PWR-HV-P48-A installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC With PWR-LV-P48-A installed: 24/48 VDC, PoE: 48 VDC With PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz With PWR-LV-NP installed: 24/48 VDC |
| Operating Voltage | With PWR-HV-P48-A installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC With PWR-LV-P48-A installed: 18 to 72 VDC, PoE: 46 to 57 VDC With PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz With PWR-LV-NP installed: 18 to 72 VDC |
| Input Current | With PWR-HV-P48-A/PWR-HV-NP installed: Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC With PWR-LV-P48-A/PWR-LV-NP installed: Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Max. PoE Power Output per Port | 36 W |
| Total PoE Power Budget | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |

Physical Characteristics

| | |
|--------------|--|
| IP Rating | IP40 |
| Dimensions | 281 x 115 x 163.25 mm (11.06 x 4.53 x 6.43 in) 296 x 115 x 163.25 mm (11.65 x 4.53 x 6.43 in) with dual PWR-HV-P48-A/PWR-LV-P48-A power modules installed |
| Weight | 3,790 g (8.36 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit) |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|------------------|---|
| Safety | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1, EN 61010-2-201, UL 61010-2-201 |
| EMC | EN 55032/35, EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-31 |
| Vibration | IEC 60068-2-6 |
| Power Substation | IEC 61850-3, IEEE 1613 |

MTBF

| | |
|-----------|-----------------|
| Time | 794,073 hrs |
| Standards | Telcordia SR332 |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|--|
| Device | 1 x MDS-G4028-L3-4XGS Series switch |
| Installation Kit | Preinstalled, 2 x DIN-rail kit 4 x cap, plastic, for SFP+ slots |

| | |
|---------------|---|
| Documentation | 1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card |
| Note | This product requires additional modules (sold separately) to function. |

Dimensions

Unit: mm (inch)

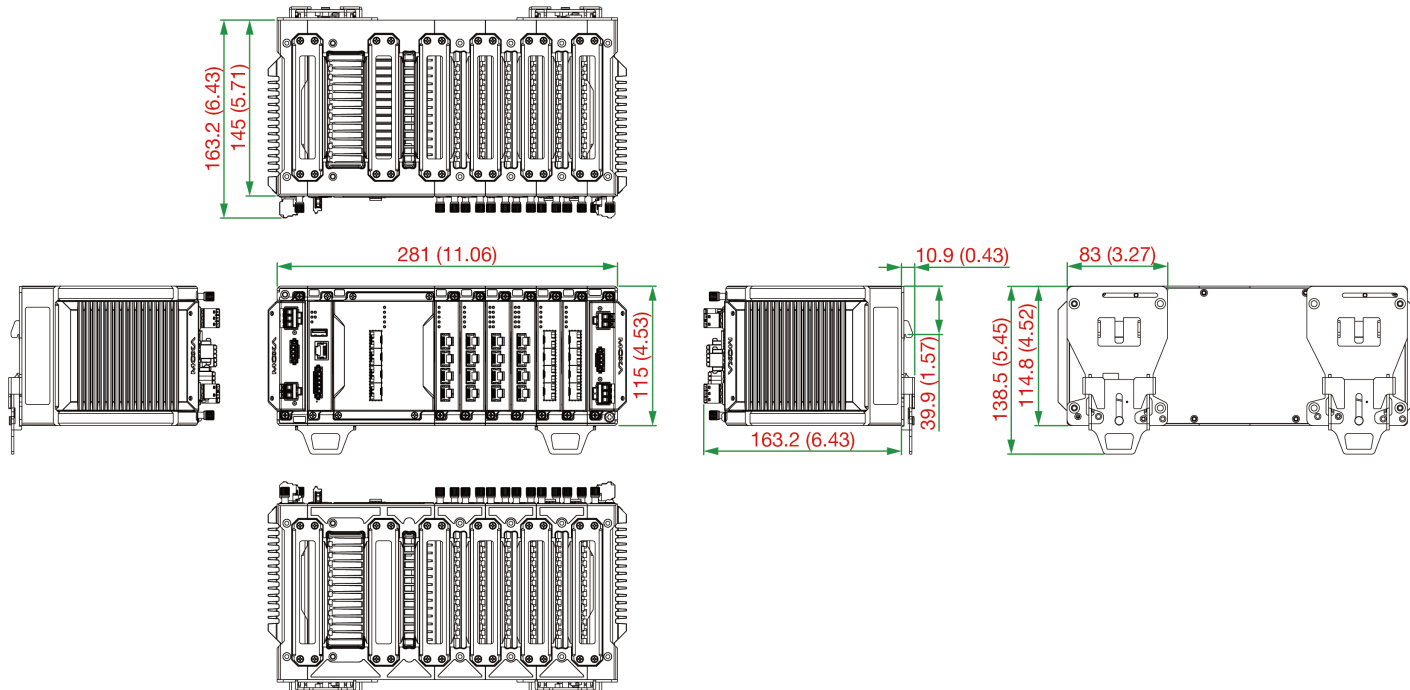

Ordering Information

| Model Name | Layer | Total No. of Ports | 10G SFP+ Slots | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|---------------------|-------|--------------------|----------------|------------------------|--|-------------------------------------|-----------------|
| MDS-G4028-L3-4XGS-T | 3 | 28 | 4 | Up to 24 | Up to 24 | Up to 24 | -40 to 75°C |

Accessories (sold separately)

LM-7000H Module Series

| | |
|----------------|---|
| LM-7000H-4GTX | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots |
| LM-7000H-4TX | Fast Ethernet module with 4 10/100BaseT(X) ports |
| LM-7000H-4PoE | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports |

Power Modules

| | |
|--------------|---|
| PWR-LV-P48-A | 24/48 VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-HV-P48-A | 110/220 VAC/VDC power supply module with system power, relay, PoE power input, advanced heat sink |
| PWR-LV-NP | Power supply module (24/48 VDC) with system power input, relay |
| PWR-HV-NP | Power supply module (110/220 VAC/VDC) with system power input, relay |

Wall-Mounting Kits

| | |
|---------------------------|--|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
| Rack-Mounting Kits | |
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
| SFP Modules | |
| SFP-10GERLC-T | SFP+ module with 1 10GBase-ER port, LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-10GLRLC-T | SFP+ module with 1 10GBase-LR port, LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-10GSRLC-T | SFP+ module with 1 10GBase-SR port, LC connector for 33m/82m/300m/400m transmission, -40 to 85°C operating temperature |
| SFP-10GZRLC-T | SFP+ module with 1 10GBase-ZR port, LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Supplies

| | |
|------------|--|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 08, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

MDS-G4028-L3 Series

28G-port Layer 3 full Gigabit modular managed Ethernet switches



Features and Benefits

- Layer 3 routing interconnects multiple LAN segments
- Multiple interface type 4-port modules for greater versatility
- Tool-free design for effortlessly adding or replacing modules without shutting down the switch
- Ultra-compact size and multiple mounting options for flexible installation
- Rugged die-cast design for use in harsh environments
- Intuitive, HTML5-based web interface for a seamless experience across different platforms

Certifications



Introduction

The MDS-G4028-L3 Series modular switches support up to 28 Gigabit ports, including 4 embedded ports, 6 interface module expansion slots, and 2 power module slots to ensure sufficient flexibility for a variety of applications. The highly compact MDS-G4000-L3 Series is designed to meet evolving network requirements, ensuring effortless installation and maintenance, and features a hot-swappable module design that enables you to easily change or add modules without shutting down the switch or interrupting network operations.

The multiple Ethernet modules (RJ45, SFP, and PoE+) and power units (24/48 VDC, 110/220 VAC/VDC) provide even greater flexibility as well as suitability for different operating conditions, delivering an adaptive full Gigabit platform that provides the versatility and bandwidth necessary to serve as an Ethernet aggregation/edge switch. Featuring a compact design that fits in confined spaces, multiple mounting methods, and convenient tool-free module installation, the MDS-G4000-L3 Series switches enable versatile and effortless deployment without the need for highly skilled engineers. With multiple industry certifications and a highly durable housing, the MDS-G4000 Series can reliably operate in tough and hazardous environments such as power substations, mining sites, ITS, and oil and gas applications. Support for dual power modules provides redundancy for high reliability and availability while LV and HV power module options offer additional flexibility to accommodate the power requirements of different applications.

Support for Layer 3 routing functionality enables these switches to facilitate the deployment of applications across different networks, making them ideal for large-scale industrial networks. In addition, the MDS-G4000-L3 Series features an HTML5-based, user-friendly web interface providing a responsive, smooth user experience across different platforms and browsers.

Specifications

Ethernet Interface

| | |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports |
| Module | 6 slots for optional 4-port FE/GE modules |

| | |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules: Any power module</p> <p>LM-7000H PoE modules: PWR-HV-P48, PWR-LV-P48 only</p> |
| Standards | <p>IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for flow control IEEE 802.3ad for Port Trunk with LACP IEEE 802.1Q for VLAN Tagging IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for authentication IEEE 802.3af/at for PoE/PoE+ output</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB, Loopback interface |
| Filter | GMRP, GVRP, GARP, 802.1Q VLAN, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation |
| Routing Redundancy | VRRP |
| Security | Broadcast storm protection, Rate Limit, Trust access control, Static Port Lock, MAC Sticky, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and Password Policy |
| Time Management | SNTP, NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |

Switch Properties

| | |
|--------------------|---------------|
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 1024 |
| Priority Queues | 8 |
| Packet Buffer Size | 12 Mbits |

Serial Interface

| | |
|--------------|--|
| Console Port | RS-232 (TxD, RxD, GND), 8-pin RJ45 (115200, n, 8, 1) |
|--------------|--|

USB Interface

| | |
|---------------|-----------------------|
| USB Connector | USB Type A (Reserved) |
|---------------|-----------------------|

Input/Output Interface

| | |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module) |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module) Relay output with current carrying capacity of 2 A @ 30 VDC |

Power Parameters

| | |
|--------------------------------|--|
| Input Voltage | with PWR-HV-P48 installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC with PWR-LV-P48 installed: 24/48 VDC, PoE: 48 VDC with PWR-HV-NP installed: 110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz with PWR-LV-NP installed: 24/48 VDC |
| Operating Voltage | with PWR-HV-P48 installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC with PWR-LV-P48 installed: 18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location) with PWR-HV-NP installed: 88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz with PWR-LV-NP installed: 18 to 72 VDC |
| Input Current | with PWR-HV-P48/PWR-HV-NP installed: Max. 0.11 A @ 110 VDC Max. 0.06 A @ 220 VDC Max. 0.29 A @ 110 VAC Max. 0.18 A @ 220 VAC with PWR-LV-P48/PWR-LV-NP installed: Max. 0.53 A @ 24 VDC Max. 0.28 A @ 48 VDC |
| Max. PoE Power Output per Port | 36 W |
| Total PoE Power Budget | Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |

Physical Characteristics

| | |
|--------------|---|
| IP Rating | IP40 |
| Dimensions | 218 x 115 x 163.25 mm (8.59 x 4.53 x 6.44 in) |
| Weight | 2840 g (6.27 lb) |
| Installation | DIN-rail mounting, Wall mounting (with optional kit), Rack mounting (with optional kit) |

Environmental Limits

| | |
|--|--|
| Operating Temperature | Standard Temp Models: -10 to 60°C (-14 to 140°F) Wide Temp Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|---------------------|---|
| Safety | EN 62368-1, IEC 62368-1, UL 62368-1, IEC 60950-1 |
| EMC | EN 55032/35, EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11: Voltage Dips and Voltage Interruptions |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-31 |
| Vibration | IEC 60068-2-6 |
| Hazardous Locations | Class I Division 2, ATEX |
| Power Substation | IEEE 1613, IEC 61850-3 |

MTBF

| | |
|-----------|-----------------|
| Time | 966,801 hrs |
| Standards | Telcordia SR332 |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|---|
| Device | 1 x MDS-G4028-L3 Series switch |
| Cable | 1 x RJ45-to-DB9 console cable |
| Installation Kit | (Pre-installed) 2 x DIN-rail kit 2 x cap, plastic, for RJ45 port |

| | |
|---------------|---|
| Documentation | 1 x quick installation guide 1 x product notice, Simplified Chinese 1 x product certificates of quality inspection, Simplified Chinese 1 x warranty card |
| Note | This product requires additional modules (sold separately) to function. |

Dimensions

Unit: mm (inch)

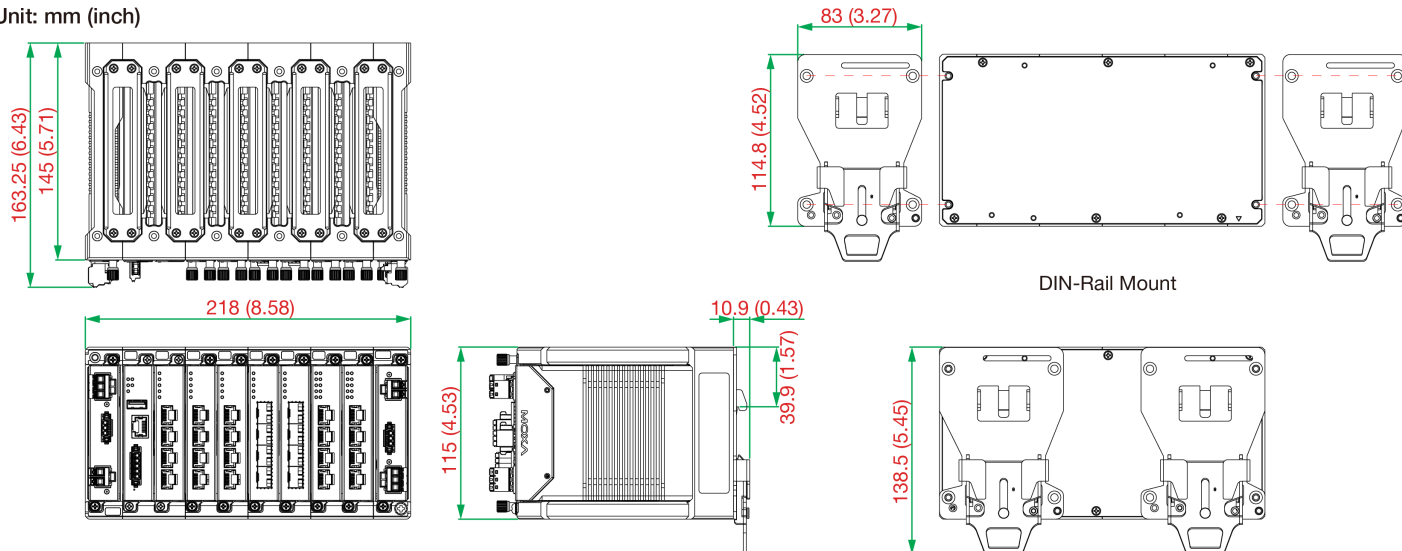

Ordering Information

| Model Name | Layer | Total No. of Ports | 100/1000BaseSFP Slots | 10/100/1000BaseT(X) Ports (RJ45 Connector) | PoE 10/100/1000BaseT(X) Ports (RJ45 Connector) | 10/100BaseT(X) Ports (RJ45 Connector) | PoE 10/100BaseT(X) Ports (RJ45 Connector) | Operating Temp. |
|----------------|-------|--------------------|-----------------------|--|--|---------------------------------------|---|-----------------|
| MDS-G4028-L3 | 3 | 28 | Up to 24 | Up to 28 | Up to 24 | Up to 24 | Up to 24 | -10 to 60°C |
| MDS-G4028-L3-T | 3 | 28 | Up to 24 | Up to 28 | Up to 24 | Up to 24 | Up to 24 | -40 to 75°C |

Accessories (sold separately)

LM-7000H Module Series

| | |
|----------------|---|
| LM-7000H-4GTX | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots |
| LM-7000H-4TX | Fast Ethernet module with 4 10/100BaseT(X) ports |
| LM-7000H-4PoE | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports |

Power Modules

| | |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP | Power supply module (24/48 VDC) with system power input, relay |
| PWR-HV-NP | Power supply module (110/220 VAC/VDC) with system power input, relay |

Wall-Mounting Kits

| | |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

Rack-Mounting Kits

| | |
|--------------------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
| SFP Modules | |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GSXLC | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXLC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |

| | |
|-----------------|--|
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZ port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZ port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Power Supplies

| | |
|------------|--|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 25, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

PM-7500 Module Series

Gigabit and Fast Ethernet modules for the PT-7528-24TX Series rackmount Ethernet switches



Features and Benefits

- -40 to 85°C wide operating temperature
- IEC 61850-3 and IEEE 1613 compliant

Certifications



Introduction

The PM-7500 Module Series includes Gigabit and Fast Ethernet modules for the PT-7528-24TX Series rackmount Ethernet switches.

Specifications

Ethernet Interface

| | |
|---|--|
| 100BaseFX Ports (multi-mode SC connector) | PM-7500-2MSC: 2 PM-7500-4MSC: 4 |
| 100BaseFX Ports (multi-mode ST connector) | PM-7500-2MST: 2 PM-7500-4MST: 4 |
| 100BaseFX Ports (single-mode SC connector) | PM-7500-2SSC: 2 PM-7500-4SSC: 4 |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | PM-7500-2GTXSFP: 2 PM-7500-4GTXSFP: 4 |

Optical Fiber

| | | 100BaseFX | | |
|------------------|------------------|--------------|--------------|--------------|
| | | Multi-Mode | | Single-Mode |
| Fiber Cable Type | | OM1 | 50/125 μm | G.652 |
| | | | 800 MHz x km | |
| Typical Distance | | 4 km | 5 km | 40 km |
| Wavelength | Typical (nm) | 1300 | | 1310 |
| | TX Range (nm) | 1260 to 1360 | | 1280 to 1340 |
| | RX Range (nm) | 1100 to 1600 | | 1100 to 1600 |
| Optical Power | TX Range (dBm) | -10 to -20 | | 0 to -5 |
| | RX Range (dBm) | -3 to -32 | | -3 to -34 |
| | Link Budget (dB) | 12 | | 29 |

| | | 100BaseFX | | |
|---|-----|--------------|-------|-------------|
| | | Multi-Mode | | Single-Mode |
| Fiber Cable Type | OM1 | 50/125 μm | G.652 | |
| | | 800 MHz x km | | |
| Dispersion Penalty (dB) | | 3 | 1 | |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).</p> | | | | |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents

| | |
|---------------|---|
| Device | 1 x PM-7500 Series module |
| Documentation | 1 x warranty card 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese |

Ordering Information

| Model Name | 100BaseFX Multi-Mode Ports with SC Connectors | 100BaseFX Multi-Mode Ports with ST Connectors | Single-Mode Ports with SC Connectors | Combo Ports, 10/100/1000BaseT(X) or 100/1000BaseSFP | Operating Temp. |
|-----------------|---|---|--------------------------------------|---|-----------------|
| PM-7500-2MSC | 2 | – | – | – | -45 to 85°C |
| PM-7500-2MST | – | 2 | – | – | -45 to 85°C |
| PM-7500-2SSC | – | – | 2 | – | -45 to 85°C |
| PM-7500-4MSC | 4 | – | – | – | -45 to 85°C |
| PM-7500-4MST | – | 4 | – | – | -45 to 85°C |
| PM-7500-4SSC | – | – | 4 | – | -45 to 85°C |
| PM-7500-2GTXSFP | – | – | – | 2 | -45 to 85°C |
| PM-7500-4GTXSFP | – | – | – | 4 | -45 to 85°C |

Accessories (sold separately)

SFP Modules

| | |
|---------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |

| | |
|----------------|--|
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

RKS-G4028 Series

28G-port (with 802.3bt PoE option) full Gigabit modular managed Ethernet switches



Features and Benefits

- Meets a wide range of demands from Fast Ethernet to full Gigabit industrial networks (up to 28 Gigabit ports)
- Modular interfaces for flexible connector type combinations
- Support for IEEE 802.3bt PoE for up to 90 W output per port
- High EMC immunity compliant with IEC 61850-3 and IEEE 1613
- Hardware-based IEEE 1588 PTP for high-precision time synchronization
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches)¹, and STP/RSTP/MSTP for network redundancy
- -40 to 75°C operating temperature range
- Supports MXstudio for easy, visualized industrial network management
- Developed according to the IEC 62443-4-1 and compliant with the IEC 62443-4-2 industrial cybersecurity standards

Certifications



Introduction

The RKS-G4028 Series is designed to meet the rigorous demands of mission-critical applications for industry and business, such as power substation automation systems (IEC 61850-3, IEEE 1613), railway applications (EN 50121-4), and factory automation systems. The RKS-G4028 Series' Gigabit and Fast Ethernet backbone, redundant ring, and 24 VDC, 48 VDC, or 110/220 VDC/VAC dual isolated redundant power supplies increase the reliability of your communications and save on wiring costs.

The modular design of the RKS-G4028 Series also makes network planning easy, and allows greater flexibility by letting you install up to 28 Gigabit ports with various connector types.

Additional Features and Benefits

- Layer 3 switching functionality to move data and information across networks (L3 models only)
- IEEE 1588v2 PTP (Precision Time Protocol) for network time synchronization
- Command line interface (CLI) for quickly configuring major managed functions
- DHCP Option 82 for IP address assignment with different policies
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- Line-swap fast recovery
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Bandwidth management prevents unpredictable network status with "Lock port" to restrict access to authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- Automatic recovery of connected device's IP addresses
- Configurable by web browser, Telnet/serial console, CLI, Windows utility, and ABC-02-USB automatic backup configurator

Specifications

Input/Output Interface

Alarm Contact Channels

1 relay output with current carrying capacity of 2 A @ 24 VDC

1. If the port link speed is 1 Gigabit or higher, the recovery time is < 50 ms.

Ethernet Interface

| | |
|--|--|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | RKS-G4028-4GT models: 4 RKS-G4028-L3-4GT models: 4 |
| 100/1000BaseSFP Slots | RKS-G4028-4GS models: 4 RKS-G4028-L3-4GS models: 4 RKS-G4028-PoE-4GS models: 4 RKS-G4028-L3-PoE-4GS models: 4 |
| Module | <p>There are 3 module slots on the switch. Users can select different types of modules to insert into the switch. The modules that can be selected include 8-port/6-port modules with 10/100/1000BaseT(X), 10/100BaseT(X), 100/1000BaseSFP, or 100BaseFX (SC/ST connector) interfaces.</p> <p>Refer to Expansion Modules in the Accessories section for a full list of supported interface modules.</p> |
| Standards | <p>IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1X for authentication IEEE 802.3 for 10BaseT IEEE 802.3ab for 1000BaseT(X) IEEE 802.3ad for Port Trunk with LACP IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3bt for Power over Ethernet</p> |

Ethernet Software Features

| | |
|----------------------|--|
| Management | IPv4/IPv6, Flow control, Back Pressure Flow Control, DHCP Server/Client, ARP, RARP, LLDP, Port Mirror, Linkup Delay, SMTP, SNMP Trap, SNMP Inform, SNMPv1/v2c/v3, RMON, TFTP, SFTP, HTTP, HTTPS, Telnet, Syslog, Private MIB |
| Filter | GMRP, GVRP, GARP, 802.1Q, IGMP Snooping v1/v2/v3, IGMP Querier |
| Redundancy Protocols | STP, RSTP, Turbo Ring v2, Turbo Chain, Ring Coupling, Dual-Homing, Link Aggregation, Loop Protection, MSTP |
| Routing Redundancy | L3 models: VRRP |
| Security | Broadcast storm protection, Rate Limit, Access control list, Static port lock, Sticky MAC, HTTPS/SSL, SSH, RADIUS, TACACS+, Login and password policy, Secure boot, MAC authentication bypass, Trust access control |
| Time Management | SNTP, IEEE 1588v2 PTP (hardware-based), NTP Server/Client, NTP Authentication |
| Protocols | IPv4/IPv6, TCP/IP, UDP, ICMP, ARP, RARP, TFTP, DNS, NTP Client, DHCP Server, DHCP Client, 802.1X, QoS, HTTPS, HTTP, Telnet, SMTP, SNMPv1/v2c/v3, RMON, Syslog |
| Unicast Routing | L3 models: OSPF, Static Route |
| MIB | P-BRIDGE MIB, Q-BRIDGE MIB, IEEE8021-SPANNING-TREE-MIB, IEEE8021-PAE-MIB, IEEE8023-LAG-MIB, LLDP-EXT-DOT1-MIB, LLDP-EXT-DOT3-MIB, SNMPv2-MIB, RMON MIB Groups 1, 2, 3, 9 |
| Power Substation | MMS |

Switch Properties

| | |
|-------------------|--------|
| IGMP Groups | 2048 |
| Jumbo Frame Size | 9.6 KB |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 256 |

| | |
|---------------------------------|--|
| Packet Buffer Size | 1.5 Mbits |
| Priority Queues | 8 |
| VLAN ID Range | VID 1 to 4094 |
| USB Interface | |
| Storage Port | USB Type A |
| MicroSD Interface | |
| Storage Port | MicroSD card |
| Serial Interface | |
| Console Port | RS-232 (RJ45) |
| Power Parameters | |
| Total PoE Power Budget | PoE models: 300 W |
| Max. PoE Power Output per Port | PoE models: IEEE 802.3af: 15.4 W IEEE 802.3at: 30 W IEEE 802.3bt: 90 W |
| Input Voltage | RKS-G4028-LV models: 24/48 VDC RKS-G4028-2LV models: 24/48 VDC (redundant dual inputs) RKS-G4028-HV models: 110/220 VAC, 110/220 VDC RKS-G4028-2HV models: 110/220 VAC, 110/220 VDC (redundant dual inputs) PoE models: 48 VDC (for the PoE system) |
| Operating Voltage | RKS-G4028-LV/2LV models: 18 to 72 VDC RKS-G4028-HV/2HV models: 88 to 300 VDC, 85 to 264 VAC PoE models: 46 to 57 VDC (for the PoE system) |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Input Current | RKS-G4028-LV/2LV models: Max. 2.53 A @ 24 VDC Max. 1.25 A @ 48 VDC RKS-G4028-HV/2HV models: Max. 0.55 A @ 110 VDC Max. 0.29 A @ 220 VDC Max. 1.01 A @ 110 VAC Max. 0.62 A @ 220 VAC EPS (PoE models only): Max. 7.50 A @ 48 VDC |
| Physical Characteristics | |
| IP Rating | IP30 |
| Dimensions | 440 x 44 x 300 mm (17.32 x 1.37 x 11.81 in) |
| Weight | RKS-G4028-LV/HV models: 4900 g (10.80 lb) RKS-G4028-2LV/2HV models: 5200 g (11.46 lb) RKS-G4028-PoE-LV/HV models: 5000 g (11.02 lb) RKS-G4028-PoE-2LV/2HV models: 5300 g (11.68 lb) |
| Installation | Rack mounting |

Environmental Limits

| | |
|--|----------------------------|
| Operating Temperature | -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |

Standards and Certifications

| | |
|------------------|--|
| Safety | EN 62368-1, UL 62368-1, UL 61010 |
| EMC | EN 55032/35 |
| EMI | CISPR 32, FCC Part 15B Class A |
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 35 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs |
| Power Substation | IEC 61850-3, IEEE 1613 |
| Railway | EN 50121-4 |
| Freefall | IEC 60068-2-32 |
| Shock | IEC 60068-2-27 |
| Vibration | IEC 60068-2-6 |

MTBF

| | |
|-----------|--|
| Time | RKS-G4028-4GT-HV models: 572,888 hours RKS-G4028-4GT-2HV models: 518,894 hours RKS-G4028-4GS-HV models: 529,925 hours RKS-G4028-4GS-2HV models: 483,436 hours RKS-G4028-4GT-LV models: 548,589 hours RKS-G4028-4GT-2LV models: 479,574 hours RKS-G4028-4GS-LV models: 508,639 hours RKS-G4028-4GS-2LV models: 449,160 hours RKS-G4028-PoE-4GS-HV models: 508,190 hours RKS-G4028-PoE-4GS-2HV models: 465,282 hours RKS-G4028-PoE-4GS-LV models: 488,598 hours RKS-G4028-PoE-4GS-2LV models: 433,472 hours |
| Standards | Telcordia (Bellcore), GB |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |


Package Contents

| | |
|------------------|--|
| Device | 1 x RKS-G4028 Series switch |
| Installation Kit | 2 x rack-mounting ear 4 x protective caps for unused SFP ports (for RKS-G4028-GS models only) 8 x round stickers for module screws |

| | |
|---------------|--|
| Documentation | 1 x quick installation guide 1 x warranty card |
| Note | <ol style="list-style-type: none"> 1. Only the RKS-G4028-PoE Series and RKS-G4028-L3-PoE models support PoE functionality with RM-G4000-8GPoE and/or RM-G4000-8PoE modules. 2. Power over Ethernet requires the 48 VDC external power supply (46 to 57 VDC). 3. The 48 VDC external power supply, SFP modules, and modules from the RM-G4000 Module Series need to be purchased separately for use with this product. |

Dimensions

Unit: mm (inch)

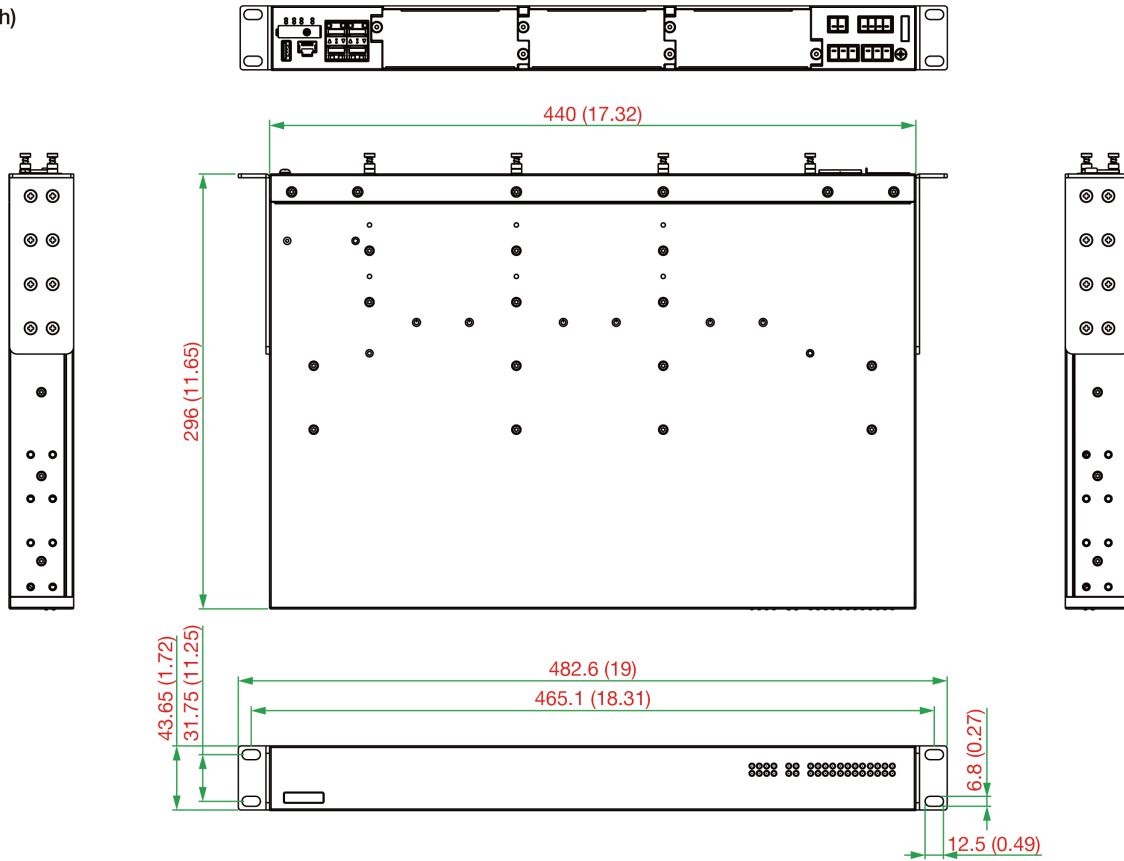

Ordering Information

| Model Name | Max. No. of Ports | PoE Support | L3 Functionality | Input Voltage | Redundant Dual Input | External Power Supply | Operating Temp. |
|-----------------------|-------------------|-------------|------------------|---------------------|----------------------|-----------------------|-----------------|
| RKS-G4028-4GT-HVT | 28 | - | - | 110/220 VAC/ VDC | - | - | -40 to 75°C |
| RKS-G4028-4GT-2HV-T | 28 | - | - | 110/220 VAC/ VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-4GS-HV-T | 28 | - | - | 110/220 VAC/ VDC | - | - | -40 to 75°C |
| RKS-G4028-4GS-2HV-T | 28 | - | - | 110/220 VAC/ VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-4GT-LV-T | 28 | - | - | 24/48 VDC | - | - | -40 to 75°C |
| RKS-G4028-4GT-2LV-T | 28 | - | - | 24/48 VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-4GS-LVT | 28 | - | - | 24/48 VDC | - | - | -40 to 75°C |
| RKS-G4028-4GS-2LV-T | 28 | - | - | 24/48 VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-L3-4GT-HV-T | 28 | - | ✓ | 110/220 VAC/ VDC | - | - | -40 to 75°C |

| Model Name | Max. No. of Ports | PoE Support | L3 Functionality | Input Voltage | Redundant Dual Input | External Power Supply | Operating Temp. |
|----------------------------|-------------------|-------------|------------------|---------------------|----------------------|-----------------------|-----------------|
| RKS-G4028-L3-4GT-2HV-T | 28 | - | ✓ | 110/220 VAC/ VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-L3-4GS-HV-T | 28 | - | ✓ | 110/220 VAC/ VDC | - | - | -40 to 75°C |
| RKS-G4028-L3-4GS-2HV-T | 28 | - | ✓ | 110/220 VAC/ VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-L3-4GT-LV-T | 28 | - | ✓ | 24/48 VDC | - | - | -40 to 75°C |
| RKS-G4028-L3-4GT-2LV-T | 28 | - | ✓ | 24/48 VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-L3-4GS-LV-T | 28 | - | ✓ | 24/48 VDC | - | - | -40 to 75°C |
| RKS-G4028-L3-4GS-2LV-T | 28 | - | ✓ | 24/48 VDC | ✓ | - | -40 to 75°C |
| RKS-G4028-PoE-4GS-HV-T | 28 | ✓ | - | 110/220 VAC/ VDC | - | ✓ | -40 to 75°C |
| RKS-G4028-PoE-4GS-2HV-T | 28 | ✓ | - | 110/220 VAC/ VDC | ✓ | ✓ | -40 to 75°C |
| RKS-G4028-PoE-4GS-LV-T | 28 | ✓ | - | 24/48 VDC | - | ✓ | -40 to 75°C |
| RKS-G4028-PoE-4GS-2LV-T | 28 | ✓ | - | 24/48 VDC | ✓ | ✓ | -40 to 75°C |
| RKS-G4028-L3-PoE-4GS-HV-T | 28 | ✓ | ✓ | 110/220 VAC/ VDC | - | ✓ | -40 to 75°C |
| RKS-G4028-L3-PoE-4GS-2HV-T | 28 | ✓ | ✓ | 110/220 VAC/ VDC | ✓ | ✓ | -40 to 75°C |
| RKS-G4028-L3-PoE-4GS-LV-T | 28 | ✓ | ✓ | 24/48 VDC | - | ✓ | -40 to 75°C |
| RKS-G4028-L3-PoE-4GS-2LV-T | 28 | ✓ | ✓ | 24/48 VDC | ✓ | ✓ | -40 to 75°C |

Accessories (sold separately)

Expansion Modules

| | |
|------------------|--|
| RM-G4000-8TX | Fast Ethernet module with 8 10/100BaseT(X) ports |
| RM-G4000-8SFP | Fast Ethernet module with 8 100BaseSFP slots |
| RM-G4000-8PoE | Fast Ethernet module with 8 10/100BaseT(X) IEEE 802.3bt PoE ports |
| RM-G4000-8GTX | Gigabit Ethernet module with 8 10/100/1000BaseT(X) ports |
| RM-G4000-8GSFP | Gigabit Ethernet module with 8 100/1000BaseSFP slots |
| RM-G4000-8GPoE | Gigabit Ethernet module with 8 10/100/1000BaseT(X) IEEE 802.3bt PoE ports |
| RM-G4000-6MSC | Fast Ethernet module with 6 multi-mode 100BaseFX ports with SC connectors |
| RM-G4000-6MST | Fast Ethernet module with 6 multi-mode 100BaseFX ports with ST connectors |
| RM-G4000-6SSC | Fast Ethernet module with 6 single-mode 100BaseFX ports with SC connectors |
| RM-G4000-4MSC2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with SC connectors, 2 10/100BaseT(X) ports |
| RM-G4000-4MST2TX | Fast Ethernet module with 4 multi-mode 100BaseFX ports with ST connectors, 2 10/100BaseT(X) ports |
| RM-G4000-4SSC2TX | Fast Ethernet module with 4 single-mode 100BaseFX ports with SC connectors, 2 10/100BaseT(X) ports |
| RM-G4000-2MSC4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with SC connectors, 4 10/100BaseT(X) ports |
| RM-G4000-2MST4TX | Fast Ethernet module with 2 multi-mode 100BaseFX ports with ST connectors, 4 10/100BaseT(X) ports |

| | |
|------------------|--|
| RM-G4000-2SSC4TX | Fast Ethernet module with 2 single-mode 100BaseFX ports with SC connectors, 4 10/100BaseT(X) ports |
|------------------|--|

Storage Kits

| | |
|------------------|--|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |
| ABC-03-microSD-T | MicroSD-based configuration backup and restoration tool, firmware upgrades, and log file storage tool for managed Ethernet switches and WLAN products, -40 to 85°C operating temperature |

SFP Modules

| | |
|----------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZXC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZXC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSXC port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLXC | SFP module with 1 1000BaseLXC port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GSXC | SFP module with 1 1000BaseSXC port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |

| | |
|----------------|---|
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXLC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXLC-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature |

Software

| | |
|-------------------|---------------------------------------|
| MXview-100 | MXview license for 100 nodes |
| MXview-50 | MXview license for 50 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Aug 15, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

RM-G4000 Module Series

Fast Ethernet and Gigabit modules for RKS-G4028 Series rackmount Ethernet switches

Features and Benefits

- -40 to 75°C operating temperature range
- IEC 61850-3 and IEEE 1613 compliant



Certifications



Introduction

The RM-G4000 Module Series includes Gigabit and Fast Ethernet modules for the RKS-G4000 Series rack-mount Ethernet switches. Each RM-G4000 Series module supports up to 8 ports with a variety of interface types including TX, MSC, SSC, and MST media types. Additionally, the RM-G4000-8GPoE and RM-G4000-8PoE modules provide the RKS-G4000 Series PoE models with high-capacity PoE functionality. IEEE 1588 interface modules provide hardware-based PTP functions for precise time synchronization across the network.

Specifications

Ethernet Interface

| | |
|---|---|
| 10/100/1000BaseT(X) Ports (RJ45 connector) | RM-G4000-8GTX: 8 |
| 10/100BaseT(X) Ports (RJ45 connector) | RM-G4000-8TX: 8 RM-G4000-4MSC2TX: 2 RM-G4000-2MSC4TX: 4 RM-G4000-4MST2TX: 2 RM-G4000-2MST4TX: 4 RM-G4000-4SSC2TX: 2 RM-G4000-2SSC4TX: 4 |
| 100/1000BaseSFP Slots | RM-G4000-8GSFP: 8 |
| 100BaseSFP Slots | RM-G4000-8SFP: 8 |
| 100BaseFX Ports (multi-mode SC connector) | RM-G4000-6MSC: 6 RM-G4000-4MSC2TX: 4 RM-G4000-2MSC4TX: 2 |
| 100BaseFX Ports (multi-mode ST connector) | RM-G4000-6MST: 6 RM-G4000-4MST2TX: 4 RM-G4000-2MST4TX: 2 |
| 100BaseFX Ports (single-mode ST connector) | RM-G4000-6SSC: 6 RM-G4000-4SSC2TX: 4 RM-G4000-2SSC4TX: 2 |
| PoE Ports (10/100/1000BaseT(X), RJ45 connector) | RM-G4000-8GPoE: 8 |

| | | | | |
|--|---|-------------------------|--------------|-------|
| PoE Ports (10/100BaseT(X), RJ45 connector) | RM-G4000-8PoE: 8 | | | |
| Optical Fiber | | | 100BaseFX | |
| | | | Multi-Mode | |
| | | | Single-Mode | |
| | Fiber Cable Type | OM1 | 50/125 μm | G.652 |
| | | | 800 MHz x km | |
| | Typical Distance | | 4 km | 5 km |
| | Wavelength | Typical (nm) | 1300 | |
| | | TX Range (nm) | 1260 to 1360 | |
| | | RX Range (nm) | 1100 to 1600 | |
| | Optical Power | TX Range (dBm) | -10 to -20 | |
| | | RX Range (dBm) | -3 to -32 | |
| | | Link Budget (dB) | 12 | |
| | | Dispersion Penalty (dB) | 3 | |
| | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).</p> | | | |

Physical Characteristics

| | |
|--------|---|
| Weight | RM-G4000-2SSC4TX: 400 g (0.88 lb) RM-G4000-6MST: 400 g (0.88 lb) RM-G4000-8TX: 300 g (0.66 lb) RM-G4000-8SFP: 400 g (0.88 lb) RM-G4000-8GTX: 300 g (0.66 lb) RM-G4000-2MSC4TX: 400 g (0.88 lb) RM-G4000-4SSC2TX: 400 g (0.88 lb) RM-G4000-4MST2TX: 400 g (0.88 lb) RM-G4000-2MST4TX: 400 g (0.88 lb) RM-G4000-4MSC2TX: 400 g (0.88 lb) RM-G4000-8GSFP: 400 g (0.88 lb) RM-G4000-6MSC: 400 g (0.88 lb) RM-G4000-6SSC: 400 g (0.88 lb) RM-G4000-8PoE: 500 g (1.10 lb) RM-G4000-8GPoE: 500 g (1.10 lb) |
|--------|---|

MTBF

| | |
|-----------|---|
| Time | RM-G4000-8TX: 12,132,675 hrs RM-G4000-8SFP: 3,005,803 hrs RM-G4000-8GTX: 12,132,675 hrs RM-G4000-8GSFP: 3,005,803 hrs RM-G4000-6MSC: 2,183,161 hrs RM-G4000-6MST: 2,183,161 hrs RM-G4000-6SSC: 2,183,161 hrs RM-G4000-4MSC2TX: 2,469,891 hrs RM-G4000-4MST2TX: 2,469,891 hrs RM-G4000-4SSC2TX: 2,469,891 hrs RM-G4000-2MSC4TX: 2,891,502 hrs RM-G4000-2MST4TX: 2,891,502 hrs RM-G4000-2SSC4TX: 2,891,502 hrs RM-G4000-8PoE: 2,063,404 hrs RM-G4000-8GPoE: 2,063,404 hrs |
| Standards | Telcordia (Bellcore), GB |

Warranty

| | |
|-----------------|--|
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |

Package Contents

| | |
|---------------|----------------------------|
| Device | 1 x RM-G4000 Series module |
| Documentation | 1 x warranty card |

Ordering Information

| Model Name | 10/100/ 1000BaseT(X) Ports | 10/100BaseT(X) Ports | 100/ 1000BaseSFP Ports | 100BaseSFP Ports | 100BaseFX Ports Multi- mode, SC Connector | 100BaseFX Port Multi-mode, ST Connector | 100BaseFX Port Single-mode, SC Connector |
|------------------|----------------------------------|----------------------------|------------------------------|---------------------|--|---|--|
| RM-G4000-8GTX | 8 | - | - | - | - | - | - |
| RM-G4000-8TX | - | 8 | - | - | - | - | - |
| RM-G4000-8GSFP | - | - | 8 | - | - | - | - |
| RM-G4000-8SFP | - | - | - | 8 | - | - | - |
| RM-G4000-6MSC | - | - | - | - | 6 | - | - |
| RM-G4000-6MST | - | - | - | - | - | 6 | - |
| RM-G4000-6SSC | - | - | - | - | - | - | 6 |
| RM-G4000-4MSC2TX | - | 2 | - | - | 4 | - | - |
| RM-G4000-4MST2TX | - | 2 | - | - | - | 4 | - |
| RM-G4000-4SSC2TX | - | 2 | - | - | - | - | 4 |
| RM-G4000-2MSC4TX | - | 4 | - | - | 2 | - | - |
| RM-G4000-2MST4TX | - | 4 | - | - | - | 2 | - |
| RM-G4000-2SSC4TX | - | 4 | - | - | - | - | 2 |
| RM-G4000-8GPoE | 8 (IEEE 802.3bt PoE) | - | - | - | - | - | - |
| RM-G4000-8PoE | - | 8 (IEEE 802.3bt PoE) | - | - | - | - | - |

Accessories (sold separately)

SFP Modules

| | |
|---------------|--|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode with LC connector for 4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |

| | |
|----------------|--|
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXC | SFP module with 1 1000BaseEZC port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZC port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXC | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXC-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXC | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, 0 to 60°C operating temperature |
| SFP-1GLSXC-T | SFP module with 1 1000BaseLSX port with LC connector for 500 m transmission, -40 to 85°C operating temperature |
| SFP-1GLXLC | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXLC-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXC | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, 0 to 60°C operating temperature |
| SFP-1GSXC-T | SFP module with 1 1000BaseSX port with LC connector for 300/550 m transmission, -40 to 85°C operating temperature |
| SFP-1GZXC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |

© Moxa Inc. All rights reserved. Updated June 09, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.