

EDS-518E Series

14+4G-port Gigabit managed Ethernet switches



Features and Benefits

- 4 Gigabit plus 14 fast Ethernet ports for copper and fiber
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches),¹ RSTP/STP, and MSTP for network redundancy
- RADIUS, TACACS+, MAB Authentication, SNMPv3, IEEE 802.1X, MAC ACL, HTTPS, SSH, and sticky MAC-addresses to enhance network security
- Security features based on IEC 62443
- EtherNet/IP, PROFINET, and Modbus TCP protocols supported for device management and monitoring
- Fiber Check™—comprehensive fiber status monitoring and warning on MST/ MSC/SSC/SFP fiber ports
- Supports MXstudio for easy, visualized industrial network management
- V-ON™ ensures millisecond-level multicast data and video network recovery

Certifications



Introduction

The EDS-518E standalone, compact 18-port managed Ethernet switches have 4 combo Gigabit ports with built-in RJ45 or SFP slots for Gigabit fiber-optic communication. The 14 fast Ethernet ports have a variety of copper and fiber port combinations that give the EDS-518E Series greater flexibility for designing your network and application. The Ethernet redundancy technologies Turbo Ring, Turbo Chain, RSTP/STP, and MSTP increase the system reliability and availability of your network backbone. The EDS-518E also supports advanced management and security features.

In addition, the EDS-518E Series is designed specifically for harsh industrial environments with limited installation space and high protection level requirements, such as maritime, rail wayside, oil and gas, factory automation, and process automation.

Additional Features and Benefits

- DHCP Option 82 for IP address assignment with different policies
- Supports EtherNet/IP, PROFINET, and Modbus TCP protocols for device management and monitoring
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- Port mirroring for online debugging
- Automatic warning by exception through email and relay output
- SNMPv1/v2c/v3 for different levels of network management
- RMON for proactive and efficient network monitoring
- Fiber Check™ provides a comprehensive fiber Digital Diagnostic Monitoring (DDM) function and event warning on MST/MSC/SSC/SFP fiber ports
- Bandwidth management to prevent unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Supports the ABC-02-USB (Automatic Backup Configurator) for system configuration backup/restore and firmware upgrade

Specifications

Input/Output Interface

| | |
|------------------------|--|
| Alarm Contact Channels | 1 Relay output with current carrying capacity of 1 A @ 24 VDC |
| Buttons | Reset button |

1. Gigabit Ethernet recovery time < 50 ms

| | |
|------------------------|---|
| Digital Input Channels | 1 |
| Digital Inputs | +13 to +30 V for state 1 -30 to +3 V for state 0 Max. input current: 8 mA |

Ethernet Interface

| | | | | |
|---|---|-------------------------|--------------|-------|
| 10/100BaseT(X) Ports (RJ45 connector) | EDS-518E-4GTXSFP: 14 EDS-518E-MM-SC-4GTXSFP/MM-ST-4GTXSFP/SS-SC-4GTXSFP: 12 All models support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection | | | |
| Combo Ports (10/100/1000BaseT(X) or 100/1000BaseSFP+) | 4 | | | |
| 10/100/1000BaseT(X) Ports (RJ45 connector) | Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection | | | |
| 100BaseFX Ports (multi-mode SC connector) | EDS-518E-MM-SC-4GTXSFP Series: 2 | | | |
| 100BaseFX Ports (multi-mode ST connector) | EDS-518E-MM-ST-4GTXSFP Series: 2 | | | |
| 100BaseFX Ports (single-mode SC connector) | EDS-518E-SS-SC-4GTXSFP Series: 2 | | | |
| Optical Fiber | 100BaseFX | | | |
| | Multi-Mode | | Single-Mode | |
| | Fiber Cable Type | OM1 | 50/125 μm | G.652 |
| | | | 800 MHz x km | |
| | Typical Distance | | 4 km | 5 km |
| | Wavelength | Typical (nm) | 1300 | |
| | | TX Range (nm) | 1260 to 1360 | |
| | | RX Range (nm) | 1100 to 1600 | |
| | Optical Power | TX Range (dBm) | -10 to -20 | |
| | | RX Range (dBm) | -3 to -32 | |
| | | Link Budget (dB) | 12 | |
| | | Dispersion Penalty (dB) | 3 | |
| | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).</p> | | | |

| | |
|-----------|---|
| Standards | IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseSX/LX/LHX/ZX IEEE 802.3x for flow control IEEE 802.1D-2004 for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1Q for VLAN Tagging IEEE 802.1X for authentication IEEE 802.3ad for Port Trunk with LACP |
|-----------|---|

Ethernet Software Features


| | |
|--------------------------|---|
| Filter | 802.1Q VLAN BPDU Filter BPDU Guard GMRP GVRP IGMP v1/v2/v3 Port-based VLAN |
| Industrial Protocols | EtherNet/IP Modbus TCP PROFINET IO Device |
| Management | LLDP Back Pressure Flow Control BOOTP Port Mirror DHCP Option 66/67/82 DHCP Server/Client Fiber check Flow control IPv4/IPv6 RARP RMON SCP SMTP SNMP Inform SNMPv1/v2c/v3 Syslog Telnet TFTP |
| MIB | Ethernet-like MIB MIB-II Bridge MIB P-BRIDGE MIB Q-BRIDGE MIB RMON MIB Groups 1, 2, 3, 9 RSTP MIB |
| Redundancy Protocols | Link Aggregation MRP MSTP RSTP STP Turbo Chain Turbo Ring v1/v2 |
| Security | Broadcast storm protection HTTPS/SSL TACACS+ SNMPv3 MAB authentication Sticky MAC NTP authentication MAC ACL Port Lock RADIUS SSH SMTP with TLS |
| Time Management | NTP Server/Client SNTP |
| Switch Properties | |
| IGMP Groups | 2048 |
| MAC Table Size | 16 K |
| Max. No. of VLANs | 64 |

| | |
|--|---|
| Packet Buffer Size | 1 Mbits |
| Priority Queues | 4 |
| VLAN ID Range | VID 1 to 4094 |
| USB Interface | |
| Storage Port | USB Type A |
| LED Interface | |
| LED Indicators | PWR1, PWR2, STATE, FAULT, 10/100M (TP port), 100M (fiber port), Gigabit combo port, MSTR/HEAD, CPLR/TAIL |
| Serial Interface | |
| Console Port | USB-serial console (Type B connector) |
| DIP Switch Configuration | |
| DIP Switches | Turbo Ring, Master, Coupler, Reserve |
| Power Parameters | |
| Connection | 2 removable 4-contact terminal block(s) |
| Input Current | EDS-518E-4GTXSFP Series: 0.45 A @ 24 VDC EDS-518E-MM-SC-4GTXSFP/MM-ST-4GTXSFP/SS-SC-4GTXSFP: 0.51 A @ 24 VDC |
| Input Voltage | 12/24/48/-48 VDC Redundant dual inputs |
| Operating Voltage | 9.6 to 60 VDC |
| Overload Current Protection | Supported |
| Reverse Polarity Protection | Supported |
| Physical Characteristics | |
| Housing | Metal |
| IP Rating | IP30 |
| Dimensions | 94 x 135 x 137 mm (3.7 x 5.31 x 5.39 in) |
| Weight | 1630 g (3.59 lb) |
| Installation | DIN-rail mounting Wall mounting (with optional kit) |
| Environmental Limits | |
| Operating Temperature | Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F) |
| Ambient Relative Humidity | 5 to 95% (non-condensing) |
| Standards and Certifications | |
| Safety | UL 508 EN 62368-1 |
| EMC | EN 55032/35 EN 61000-6-2/-6-4 |
| EMI | CISPR 32, FCC Part 15B Class A |

| | |
|-------------------------|---|
| EMS | IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF |
| Hazardous Locations | ATEX Class I Division 2 |
| Power Substation | IEC 61850-3 IEEE 1613 |
| Railway | EN 50121-4 |
| Traffic Control | NEMA TS2 |
| Vibration | IEC 60068-2-6 |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-32 |
| Maritime | LR ABS DNV NK |
| MTBF | |
| Standards | Telcordia (Bellcore), GB |
| Time | EDS-518E-4GTXSFP: 865,559 hrs EDS-518E-MM/SS: 806,427 hrs |
| Warranty | |
| Warranty Period | 5 years |
| Details | See www.moxa.com/warranty |
| Package Contents | |
| Device | 1 x EDS-518E Series switch |
| Cable | 1 x USB type A male to USB type B male |
| Installation Kit | 4 x cap, plastic, for RJ45 port 4 x cap, plastic, for SFP slot |
| Documentation | 1 x quick installation guide 1 x warranty card 1 x product certificates of quality inspection, Simplified Chinese 1 x product notice, Simplified Chinese |
| Note | SFP modules need to be purchased separately for use with this product. |

Dimensions

Unit: mm (inch)

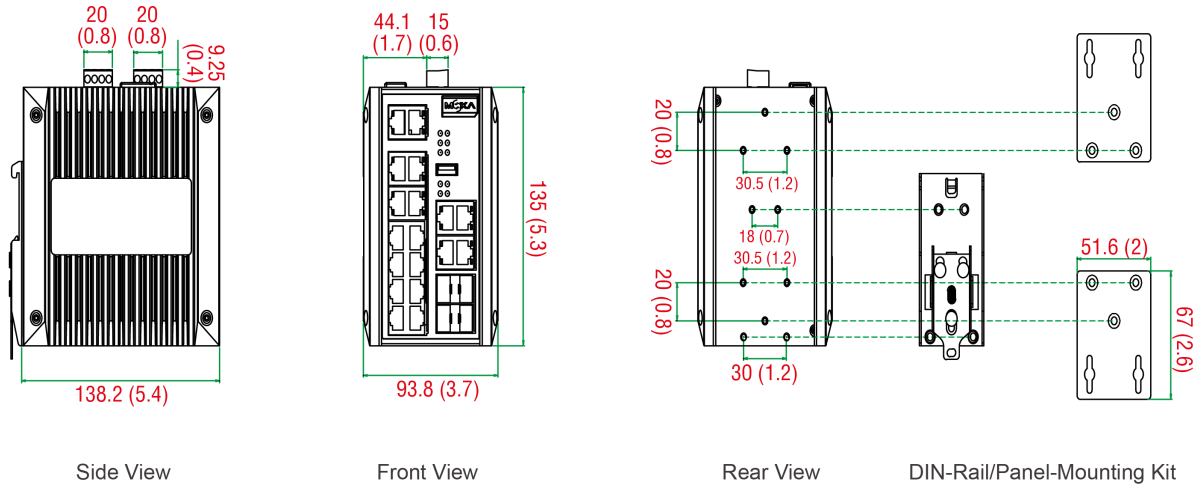

Ordering Information

| Model Name | 10/100BaseT(X) Ports RJ45 Connector | Combo Ports 10/100/1000BaseT(X) or 100/1000BaseSFP+ | 100BaseFX Ports Multi-Mode, SC Connector | 100BaseFX Ports Multi-Mode, ST Connector | 100BaseFX Ports Single-Mode, SC Connector | Operating Temp. |
|--------------------------|-------------------------------------|---|--|--|---|-----------------|
| EDS-518E-4GTXSFP | 14 | 4 | - | - | - | -10 to 60°C |
| EDS-518E-4GTXSFP-T | 14 | 4 | - | - | - | -40 to 75°C |
| EDS-518E-MM-SC-4GTXSFP | 12 | 4 | 2 | - | - | -10 to 60°C |
| EDS-518E-MM-SC-4GTXSFP-T | 12 | 4 | 2 | - | - | -40 to 75°C |
| EDS-518E-MM-ST-4GTXSFP | 12 | 4 | - | 2 | - | -10 to 60°C |
| EDS-518E-MM-ST-4GTXSFP-T | 12 | 4 | - | 2 | - | -40 to 75°C |
| EDS-518E-SS-SC-4GTXSFP | 12 | 4 | - | - | 2 | -10 to 60°C |
| EDS-518E-SS-SC-4GTXSFP-T | 12 | 4 | - | - | 2 | -40 to 75°C |

Accessories (sold separately)

Storage Kits

| | |
|--------------|---|
| ABC-02-USB | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

SFP Modules

| | |
|--------------|---|
| SFP-1FELLC-T | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature |
| SFP-1FEMLC-T | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature |
| SFP-1FESLC-T | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature |

| | |
|-----------------|--|
| SFP-1G10ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1GEZXLC | SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature |
| SFP-1GEZXLC-120 | SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHLC-T | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature |
| SFP-1GLHXL | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature |
| SFP-1GLHXL-T | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature |
| SFP-1GLSXL | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature |
| SFP-1GLSXL-T | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature |
| SFP-1GLXL | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature |
| SFP-1GLXL-T | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature |
| SFP-1GSXL | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature |
| SFP-1GSXL-T | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GZXLC | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature |
| SFP-1GZXLC-T | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature |

Power Supplies

| | |
|-----------|---|
| HDR-60-24 | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature |
|-----------|---|

| | |
|------------|--|
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |

Wall-Mounting Kits

| | |
|----------|---|
| WK-51-01 | Wall mounting kit with 2 plates (51.6 x 67 x 2 mm) and 6 screws |
|----------|---|

Software

| | |
|-------------------|---------------------------------------|
| MXview-50 | MXview license for 50 nodes |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |
| MXview-1000 | MXview license for 1000 nodes |
| MXview-2000 | MXview license for 2000 nodes |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved. Updated Sep 25, 2024.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.